


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

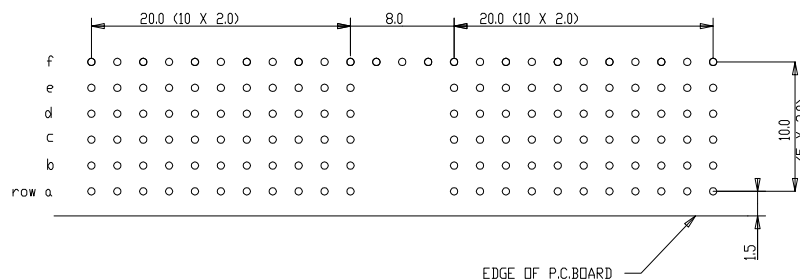

Material				Spec ref								
Mat code				tolerance								
Heat treat				projection								
Plating/Finish				MM								
rev	ecn no	dr	date	Dr	4 2 92	J V B	Product family	MILLIPACS	size	A1	Scale	5.000
A	CONNECTION	KN	14-9-01	Eng			Model Name	HM210P510F----	ECN			
B	105-0093	MNI	08/06/05	Chr			Model Revision		REL Level			
C	105-0278	Kason	02/08/05	Appr								
D	107-0362	Kason	05/09/07									
E	EG0-010	NZ	05/30/10									
-	-	-	-									
07	DIMENSION CHANGE	RM	09/08/01	Prd/E File	catalog no	HM210P510F----	CUSTOMER DRAWING	sheet 1 of 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R10PA510FE9LF](#) [HM2R10PA510FN9LF](#)