
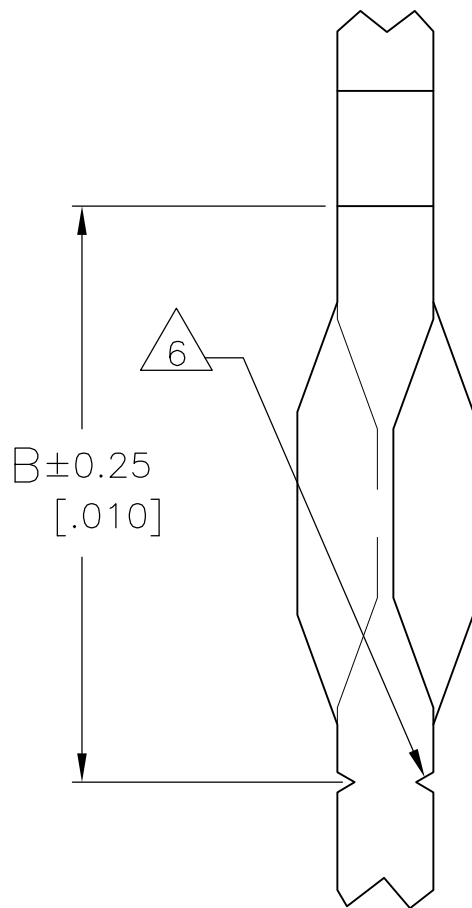


D

C

B

A

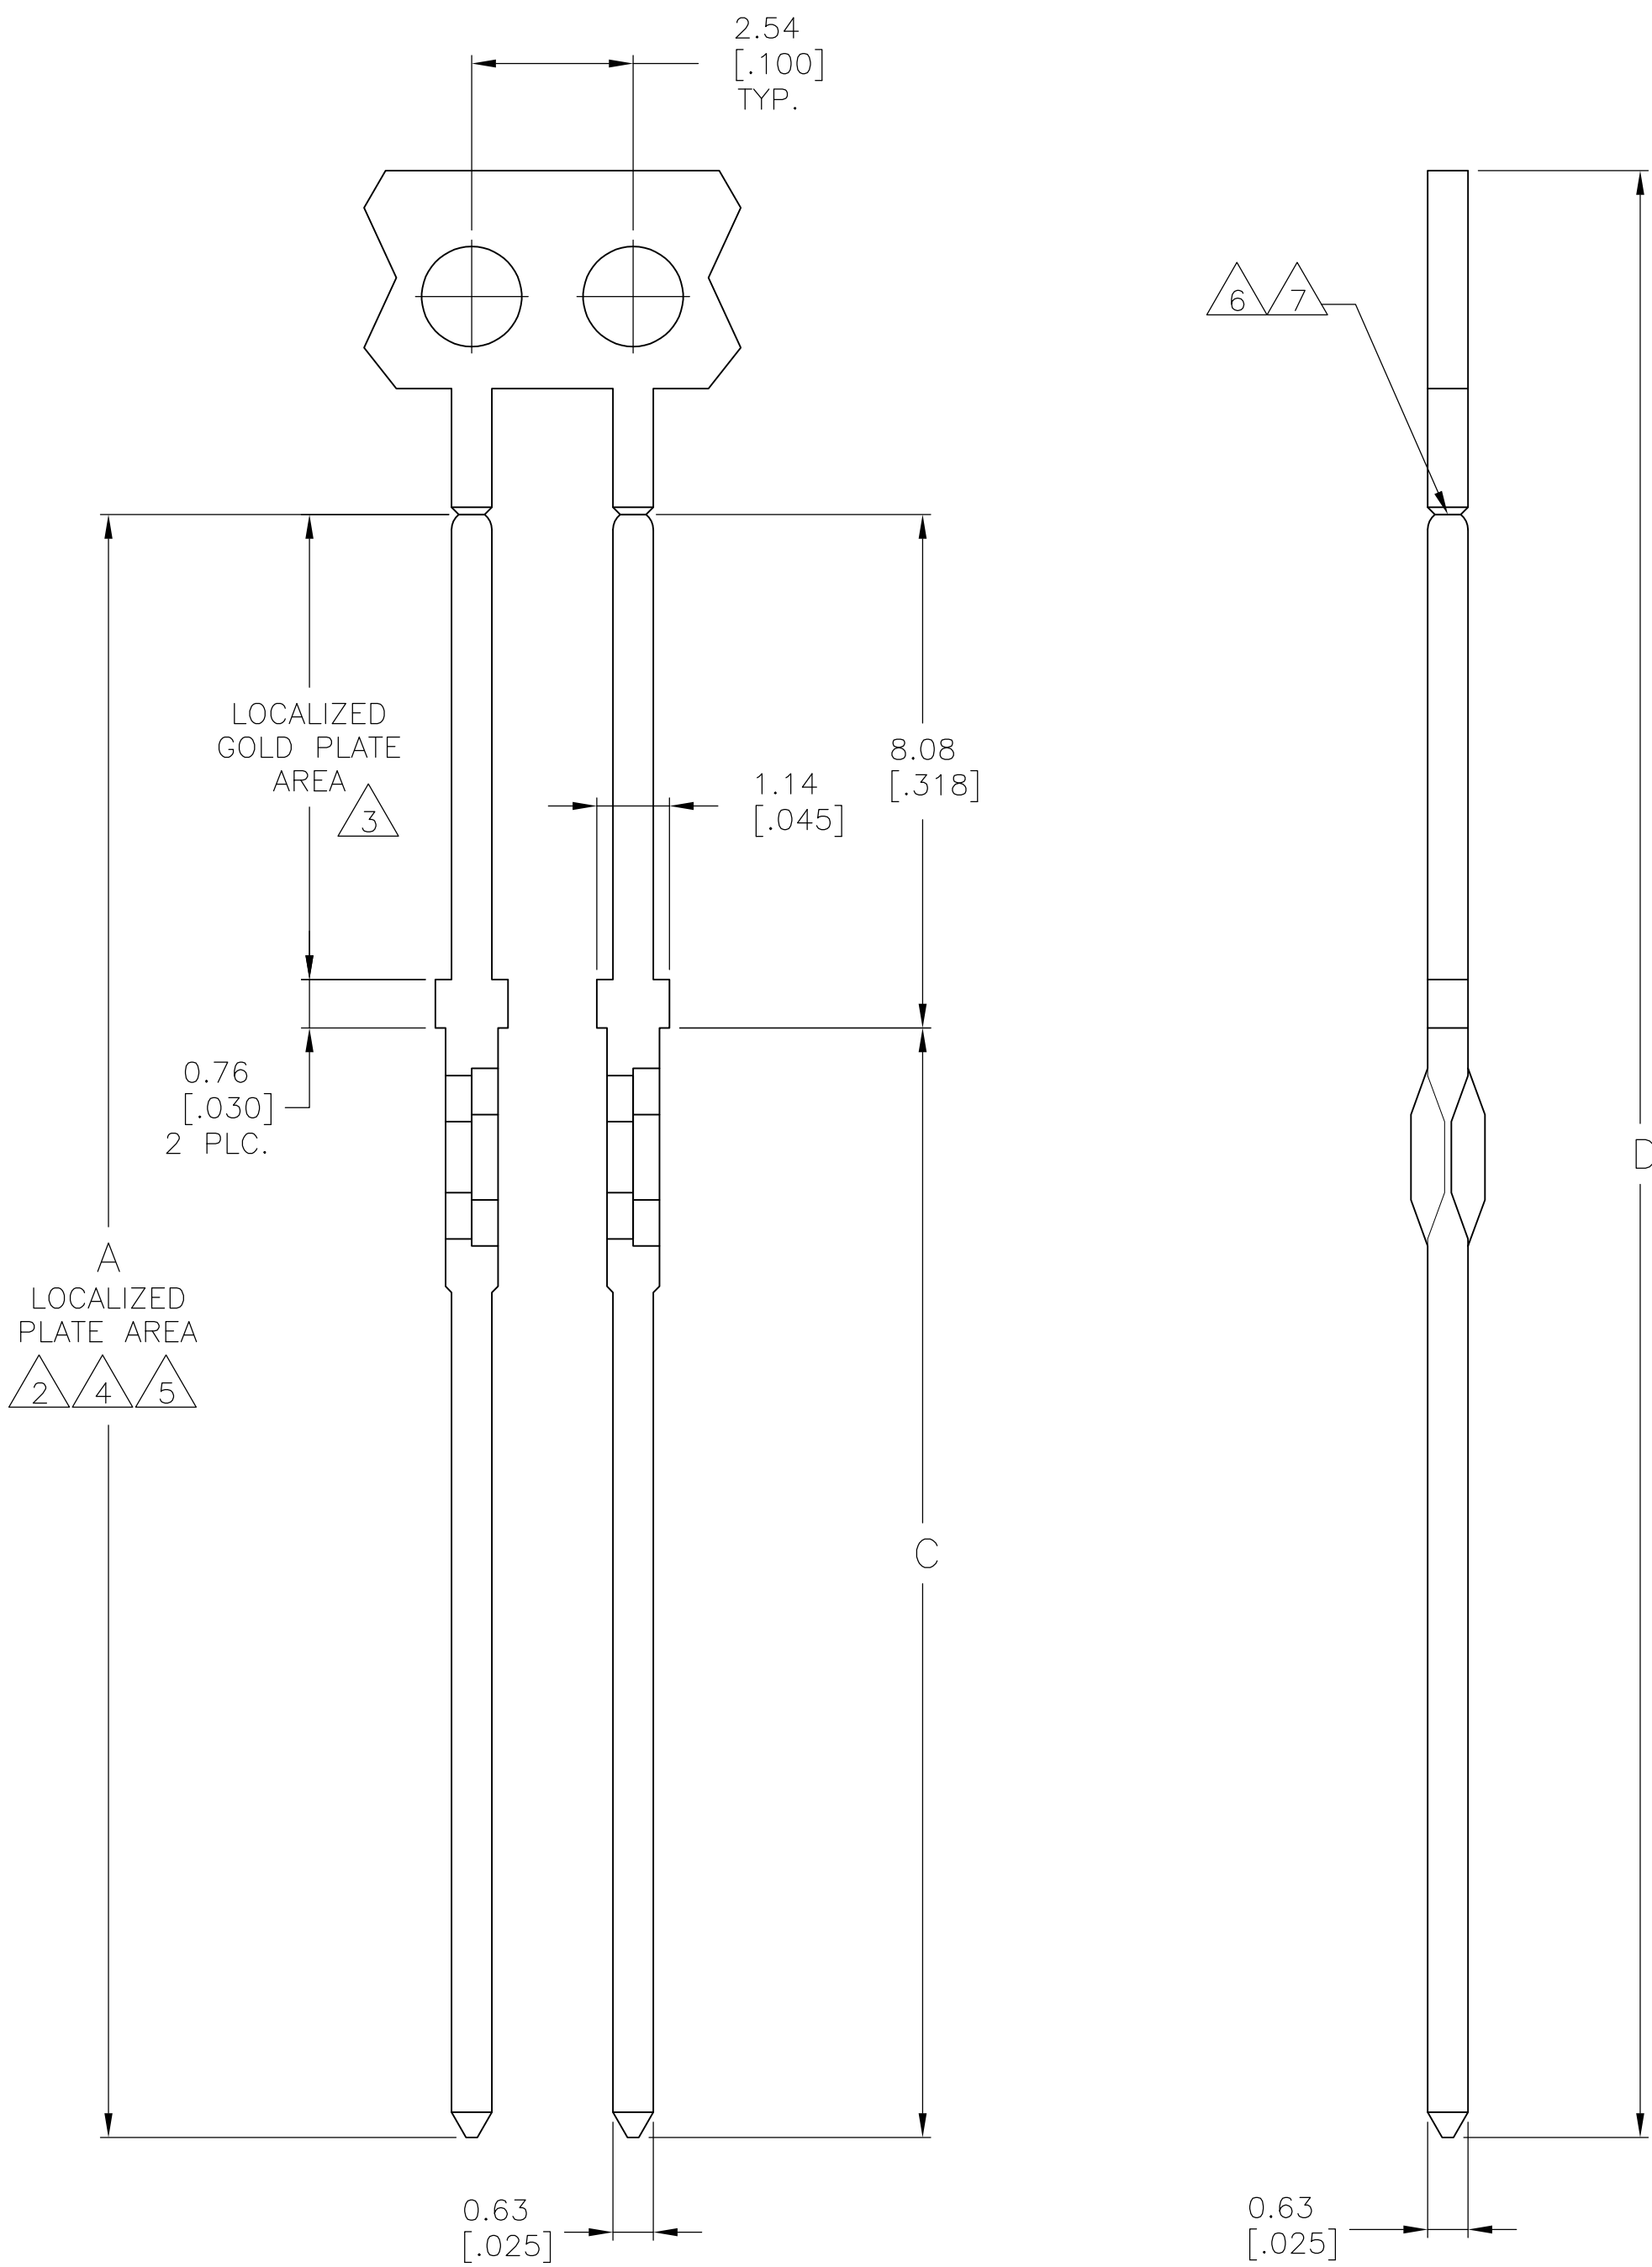

- 1 COPPER ALLOY.
- 2 1.27µm [.000050] MIN. GOLD PER MIL-G-45204 OVER
2.54µm [.000100] MIN. NICKEL PER QQ-N-290 IN LOCALIZED PLATE AREA.
- 3 0.76µm [.000030] MIN. GOLD PER MIL-G-45204 IN LOCALIZED GOLD PLATE AREA, 0.025µm [.000001] MIN. GOLD FLASH PER MIL-G-45204 ON REMAINDER, BOTH OVER 1.27µm [.000050] MIN. NICKEL PER QQ-N-290.
- 4 0.76µm [.000030] MIN. GOLD PER MIL-G-45204 OVER
2.54µm [.000100] MIN. NICKEL PER QQ-N-290 IN LOCALIZED PLATE AREA.
- 5 2.54µm [.000100] MIN. TIN-LEAD OVER
1.27µm [.000050] MIN. NICKEL PER QQ-N-290 IN LOCALIZED PLATE AREA.
- 6 PRE-NOTCH SHOULD BREAK WITH 120° BEND.
- 7 POST TIP IS MATEABLE WITH FEMALE CONNECTOR.
8. TYPICAL REEL QUANTITY IS 50,000±5,000 POSTS.
9. RECOMMENDED BOARD THICKNESS IS 2.36-3.18 [.093-.125].
10. REQUIRED HOLE DIAMETER TOLERANCES:

HOLE DIA. ±0.03[.001]	PLATING THICKNESS		HOLE DIA		COPPER HARDNESS KNOOP	PAD DIA. MIN.
	COPPER	TIN-LEAD	AFTER PLATING	AFTER REFLOW		
1.151 [.0453]	0.03-0.08 [.001-.003]	0.008 MIN. [.0003]	0.94-1.09 [.037-.043]	0.94-1.09 [.037-.043]	150 MAX.	1.57 [.062]
1.151 [.0453]	NOT PLATED THRU					1.65 [.065]

- 12 2.54µm [.000100] MIN. TIN OVER
1.27µm [.000050] MIN. NICKEL PER QQ-N-290 IN LOCALIZED PLATE AREA.
- 13 2.54µm [.000100] MIN. MATTE TIN OVER.
1.27µm [.000050] MIN. NICKEL PER QQ-N-290 IN LOCALIZED PLATE AREA.

OBSOLETE	—	—	26.19 [1.031]	12.70 [.500]	—	20.78 [.818]	13	7-117249-0
OBSOLETE	PER DETAIL S	—	30.94 [1.218]	17.45 [.687]	5.84 [.230]	25.53 [1.005]	12	6-117249-8
OBSOLETE	—	—	30.94 [1.218]	17.45 [.687]	—	25.53 [1.005]	12	6-117249-7
OBSOLETE	PER DETAIL S	—	30.94 [1.218]	17.45 [.687]	5.84 [.230]	25.53 [1.005]	5	6-117249-6
OBSOLETE	—	—	30.94 [1.218]	17.45 [.687]	—	25.53 [1.005]	5	6-117249-5
OBSOLETE	PER DETAIL S	—	30.94 [1.218]	17.45 [.687]	5.84 [.230]	25.53 [1.005]	3	6-117249-3
OBSOLETE	PER DETAIL S	—	30.94 [1.218]	17.45 [.687]	7.19 [.283]	25.53 [1.005]	3	6-117249-1
OBSOLETE	—	—	26.19 [1.031]	12.70 [.500]	—	20.78 [.818]	5	5-117249-6
OBSOLETE	—	118470	26.19 [1.031]	12.70 [.500]	—	20.78 [.818]	3	3-117249-2
	PER DETAIL S	118385	30.94 [1.218]	17.45 [.687]	4.57 [.180]	25.53 [1.005]	3	3-117249-1
	—	117249	30.94 [1.218]	17.45 [.687]	—	25.53 [1.005]	4	1-117249-2
OBSOLETE	—	117820	30.94 [1.218]	17.45 [.687]	—	25.53 [1.005]	3	117249-7
	—	117259	30.94 [1.218]	17.45 [.687]	—	25.53 [1.005]	2	117249-2
PRE-NOTCH		COMB NUMBER	D	C	B	A	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.25[.010]
3 PLC ± -
4 PLC ± -
ANGLES ± °

MATERIAL

1

DWN
D.HARDY
24JAN00

CHK
M.MILLER
04FEB00

APVD
M.MILLER
04FEB00

NAME

TE Connectivity

POST, FEED-THRU
ECONOMATE
—

SIZE
A1

CAGE CODE
00779

DRAWING NO
117249

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
10:1

SHEET
1 OF 1

REV
AK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[117249-7](#)