
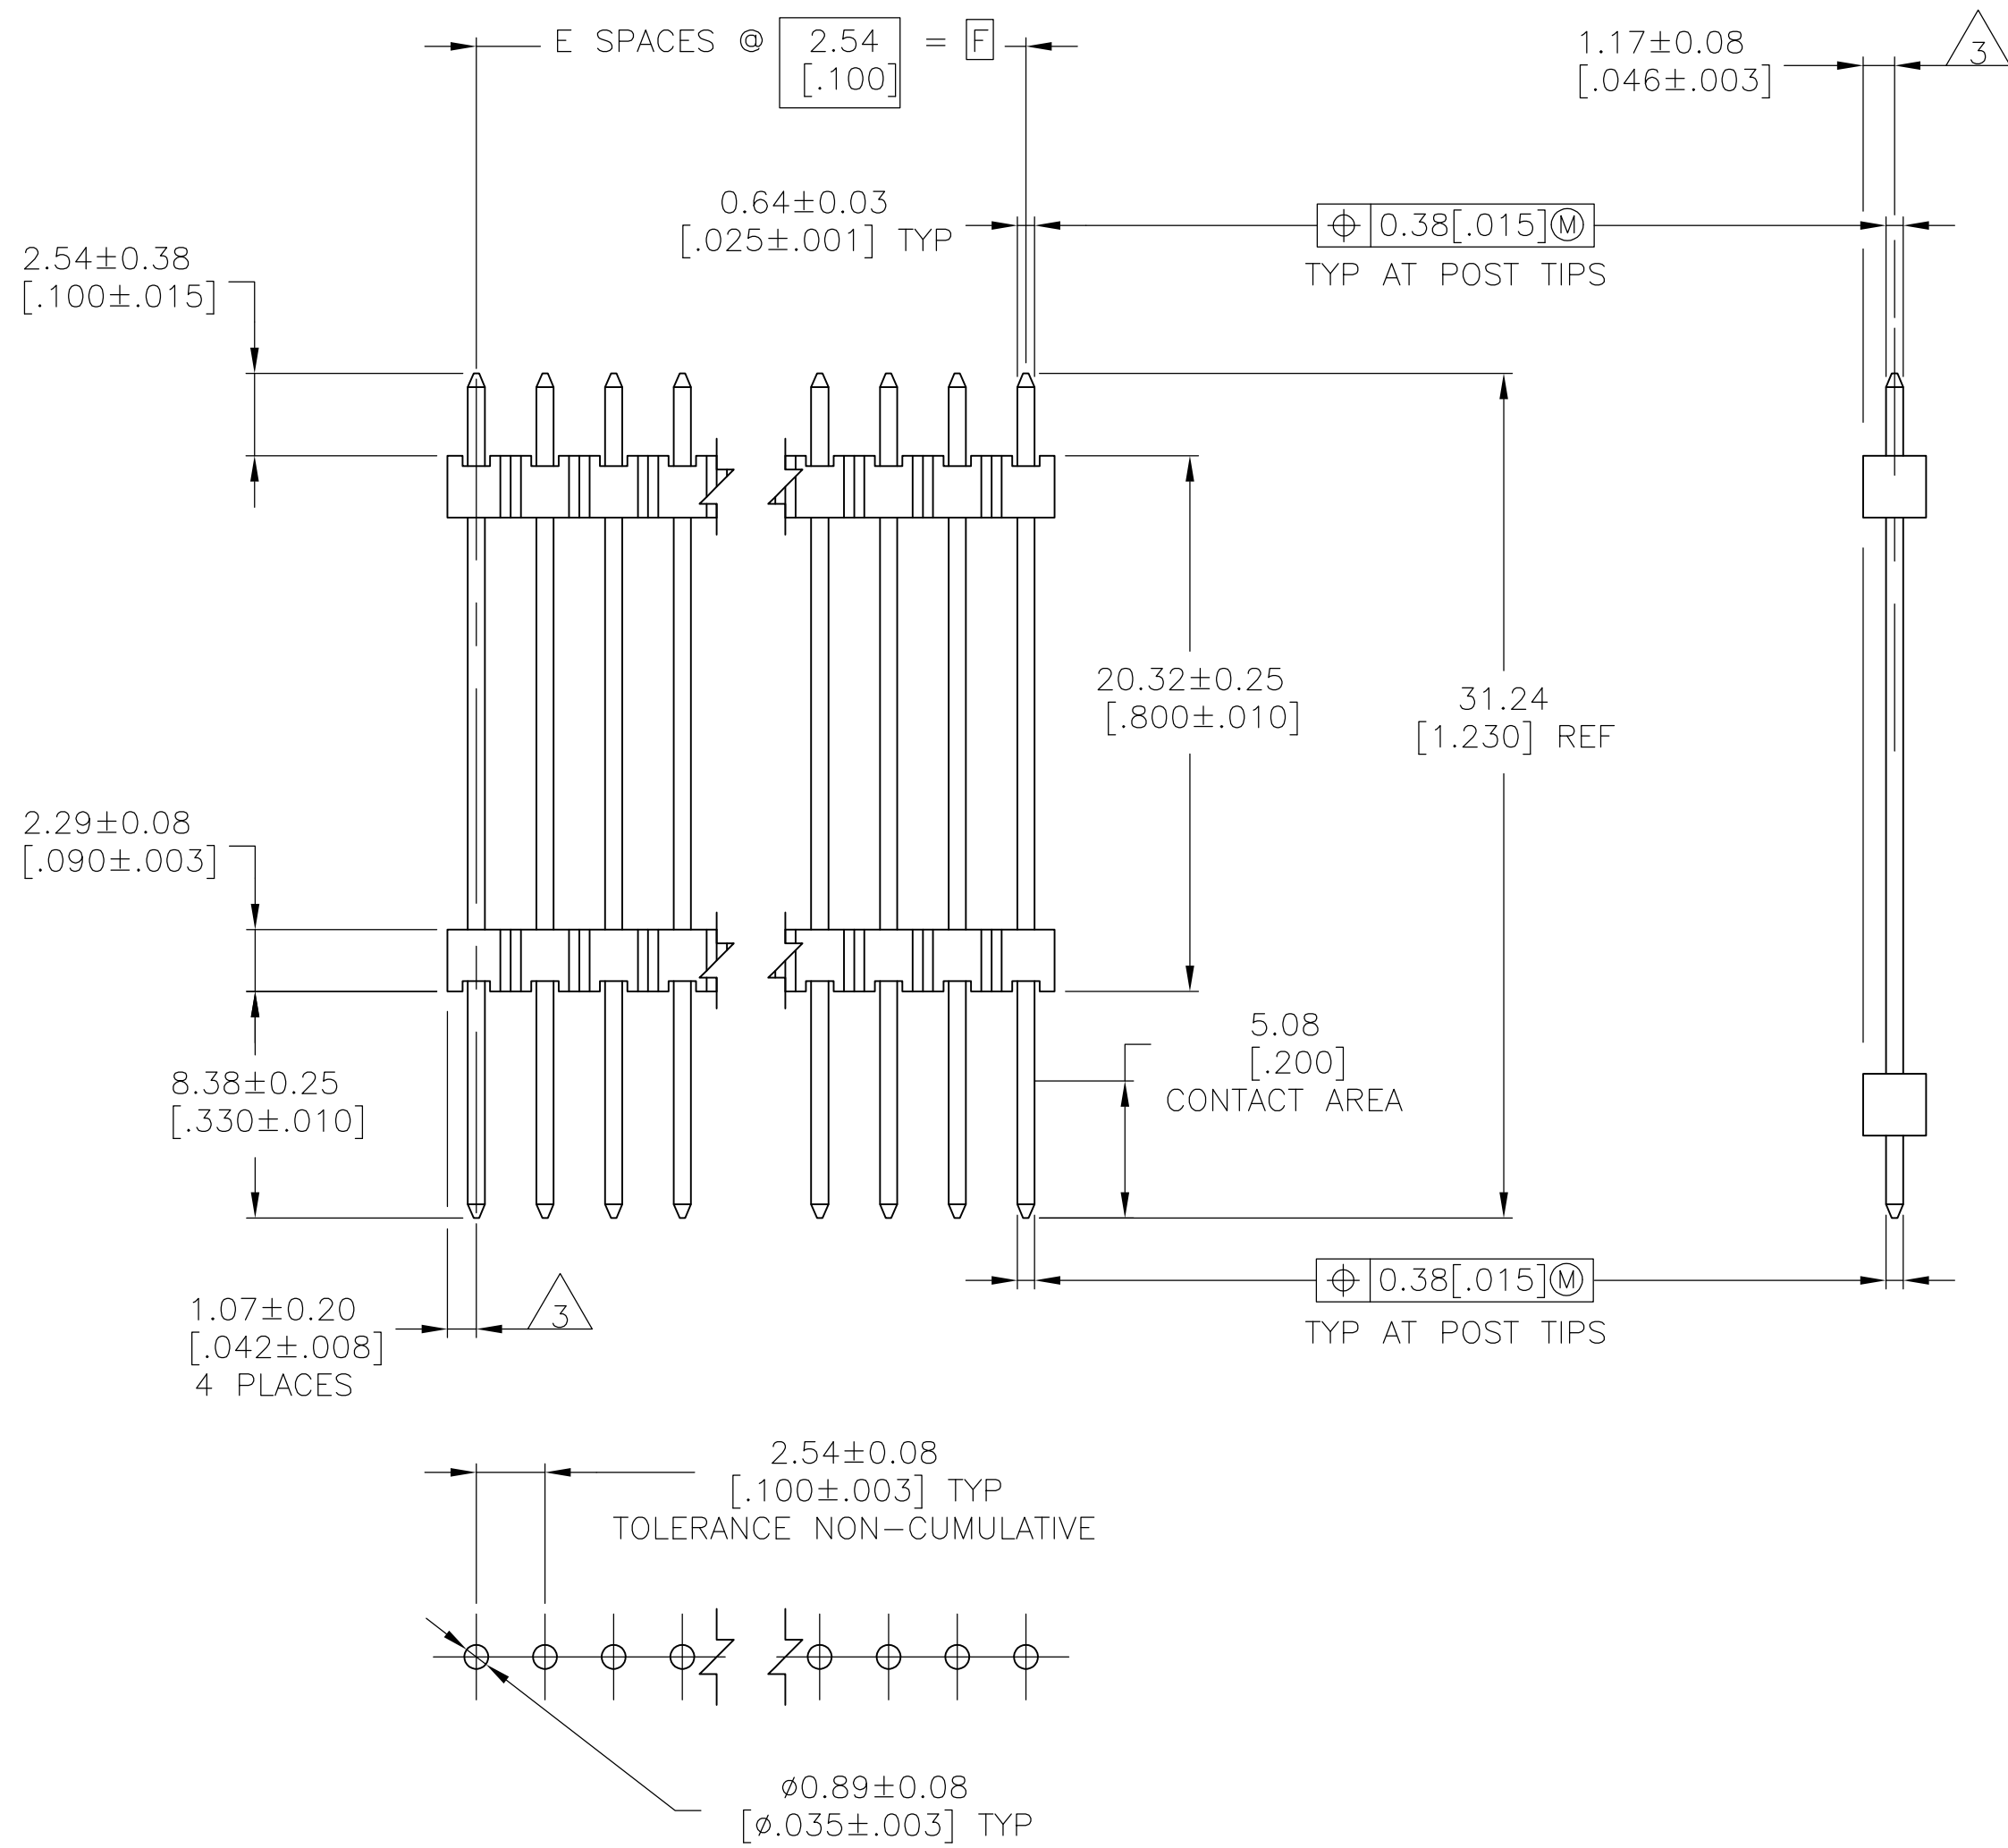


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

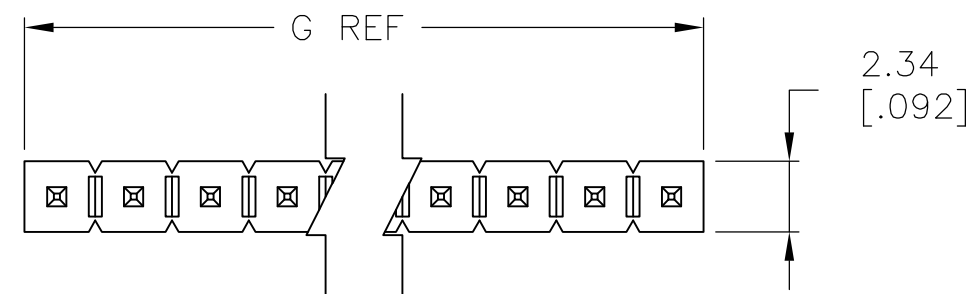

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING

 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.

5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

6 FINISH: 0.000381 [0.00015] GOLD ON CONTACT AREA,
0.00254-0.00508 [0.00100-0.000200] MATTE TIN
ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.

	101.19 [3.984]	99.06 [3.900]	39	40	9-146475-0
	98.65 [3.884]	96.52 [3.800]	38	39	8-146475-9
	96.11 [3.784]	93.98 [3.700]	37	38	8-146475-8
	93.57 [3.684]	91.44 [3.600]	36	37	8-146475-7
	91.03 [3.584]	88.90 [3.500]	35	36	8-146475-6
	88.49 [3.484]	86.36 [3.400]	34	35	8-146475-5
	85.95 [3.384]	83.82 [3.300]	33	34	8-146475-4
	83.41 [3.284]	81.28 [3.200]	32	33	8-146475-3
	80.87 [3.184]	78.74 [3.100]	31	32	8-146475-2
	78.33 [3.084]	76.20 [3.000]	30	31	8-146475-1
	75.79 [2.984]	73.66 [2.900]	29	30	8-146475-0
	73.25 [2.884]	71.12 [2.800]	28	29	7-146475-9
	70.71 [2.784]	68.58 [2.700]	27	28	7-146475-8
	68.17 [2.684]	66.04 [2.600]	26	27	7-146475-7
	65.63 [2.584]	63.50 [2.500]	25	26	7-146475-6
	63.09 [2.484]	60.96 [2.400]	24	25	7-146475-5
	60.55 [2.384]	58.42 [2.300]	23	24	7-146475-4
	58.01 [2.284]	55.88 [2.200]	22	23	7-146475-3
	55.47 [2.184]	53.34 [2.100]	21	22	7-146475-2
	52.93 [2.084]	50.80 [2.000]	20	21	7-146475-1
	50.39 [1.984]	48.26 [1.900]	19	20	7-146475-0
	47.85 [1.884]	45.72 [1.800]	18	19	6-146475-9
	45.31 [1.784]	43.18 [1.700]	17	18	6-146475-8
	42.77 [1.684]	40.64 [1.600]	16	17	6-146475-7
	40.23 [1.584]	38.10 [1.500]	15	16	6-146475-6
	37.69 [1.484]	35.56 [1.400]	14	15	6-146475-5
	35.15 [1.384]	33.02 [1.300]	13	14	6-146475-4
	32.61 [1.284]	30.48 [1.200]	12	13	6-146475-3
	30.07 [1.184]	27.94 [1.100]	11	12	6-146475-2
	27.53 [1.084]	25.40 [1.000]	10	11	6-146475-1
	24.99 [.984]	22.86 [.900]	9	10	6-146475-0
	22.45 [.884]	20.32 [.800]	8	9	5-146475-9
	19.91 [.784]	17.78 [.700]	7	8	5-146475-8
	17.37 [.684]	15.24 [.600]	6	7	5-146475-7
	14.83 [.584]	12.70 [.500]	5	6	5-146475-6
	12.29 [.484]	10.16 [.400]	4	5	5-146475-5
	9.75 [.384]	7.62 [.300]	3	4	5-146475-4
	7.21 [.284]	5.08 [.200]	2	3	5-146475-3
	4.67 [.184]	2.54 [.100]	1	2	5-146475-2
	2.13 [.084]	-	-	1	5-146475-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

$\triangle_5$	101.9 [3.984]	99.06 [3.900]	39	40	4-146475-0
$\triangle_5$	98.65 [3.884]	96.52 [3.800]	38	39	3-146475-9
$\triangle_5$	96.11 [3.784]	93.98 [3.700]	37	38	3-146475-8
$\triangle_5$	93.57 [3.684]	91.44 [3.600]	36	37	3-146475-7
$\triangle_5$	91.03 [3.584]	88.90 [3.500]	35	36	3-146475-6
$\triangle_5$	88.49 [3.484]	86.36 [3.400]	34	35	3-146475-5
$\triangle_5$	85.95 [3.384]	83.82 [3.300]	33	34	3-146475-4
$\triangle_5$	83.41 [3.284]	81.28 [3.200]	32	33	3-146475-3
$\triangle_5$	80.87 [3.184]	78.74 [3.100]	31	32	3-146475-2
$\triangle_5$	78.33 [3.084]	76.20 [3.000]	30	31	3-146475-1
$\triangle_5$	75.79 [2.984]	73.66 [2.900]	29	30	3-146475-0
$\triangle_5$	73.25 [2.884]	71.12 [2.800]	28	29	2-146475-9
$\triangle_5$	70.71 [2.784]	68.58 [2.700]	27	28	2-146475-8
$\triangle_5$	68.17 [2.684]	66.04 [2.600]	26	27	2-146475-7
$\triangle_5$	65.63 [2.584]	63.50 [2.500]	25	26	2-146475-6
$\triangle_5$	63.09 [2.484]	60.96 [2.400]	24	25	2-146475-5
$\triangle_5$	60.55 [2.384]	58.42 [2.300]	23	24	2-146475-4
$\triangle_5$	58.01 [2.284]	55.88 [2.200]	22	23	2-146475-3
$\triangle_5$	55.47 [2.184]	53.34 [2.100]	21	22	2-146475-2
$\triangle_5$	52.93 [2.084]	50.80 [2.000]	20	21	2-146475-1
$\triangle_5$	50.39 [1.984]	48.26 [1.900]	19	20	2-146475-0
$\triangle_5$	47.85 [1.884]	45.72 [1.800]	18	19	1-146475-9
$\triangle_5$	45.31 [1.784]	43.18 [1.700]	17	18	1-146475-8
$\triangle_5$	42.77 [1.684]	40.64 [1.600]	16	17	1-146475-7
$\triangle_5$	40.23 [1.584]	38.10 [1.500]	15	16	1-146475-6
$\triangle_5$	37.69 [1.484]	35.56 [1.400]	14	15	1-146475-5
$\triangle_5$	35.15 [1.384]	33.02 [1.300]	13	14	1-146475-4
$\triangle_5$	32.61 [1.284]	30.48 [1.200]	12	13	1-146475-3
$\triangle_5$	30.07 [1.184]	27.94 [1.100]	11	12	1-146475-2
$\triangle_5$	27.53 [1.084]	25.40 [1.000]	10	11	1-146475-1
$\triangle_5$	24.99 [.984]	22.86 [.900]	9	10	1-146475-0
$\triangle_5$	22.45 [.884]	20.32 [.800]	8	9	146475-9
$\triangle_5$	19.91 [.784]	17.78 [.700]	7	8	146475-8
$\triangle_5$	17.37 [.684]	15.24 [.600]	6	7	146475-7
$\triangle_5$	14.83 [.584]	12.70 [.500]	5	6	146475-6
$\triangle_5$	12.29 [.484]	10.16 [.400]	4	5	146475-5
$\triangle_5$	9.75 [.384]	7.62 [.300]	3	4	146475-4
$\triangle_5$	7.21 [.284]	5.08 [.200]	2	3	146475-3
$\triangle_5$	4.67 [.184]	2.54 [.100]	1	2	146475-2
$\triangle_5$	2.13 [.084]	-	-	1	146475-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO. BRANDBERG 14MAR97 CHKD. G. DUBNICZKI 14MAR97 APPVD. G. DUBNICZKI 14MAR97		 TE Connectivity	
DIMENSIONS: mm. [INCHES]		TO FRANCES UNLESS OTHERWISE SPECIFIED: 0 P.L.C. ± — 1 P.L.C. ± — 2 P.L.C. ± 0.51[.02] 3 P.L.C. ± 0.127[.005] 4 P.L.C. ± 0.0127[.0005] ANGLES ± = — FINISH		NAME HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
MATERIAL  SEE TABLE		PRODUCT SPEC APPLICATION SPEC WEIGHT —		SIZE CAGE CODE DRAWING NO. A1 00779 C 146475	
		CUSTOMER DRAWING		RESTRICTED TO — SCALE 4:1 SHEET 1 OF 1 REV A1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146475-8](#)