







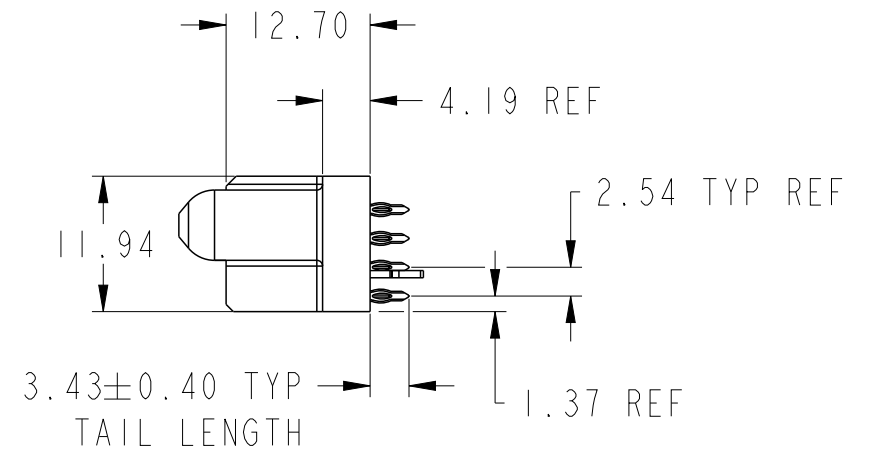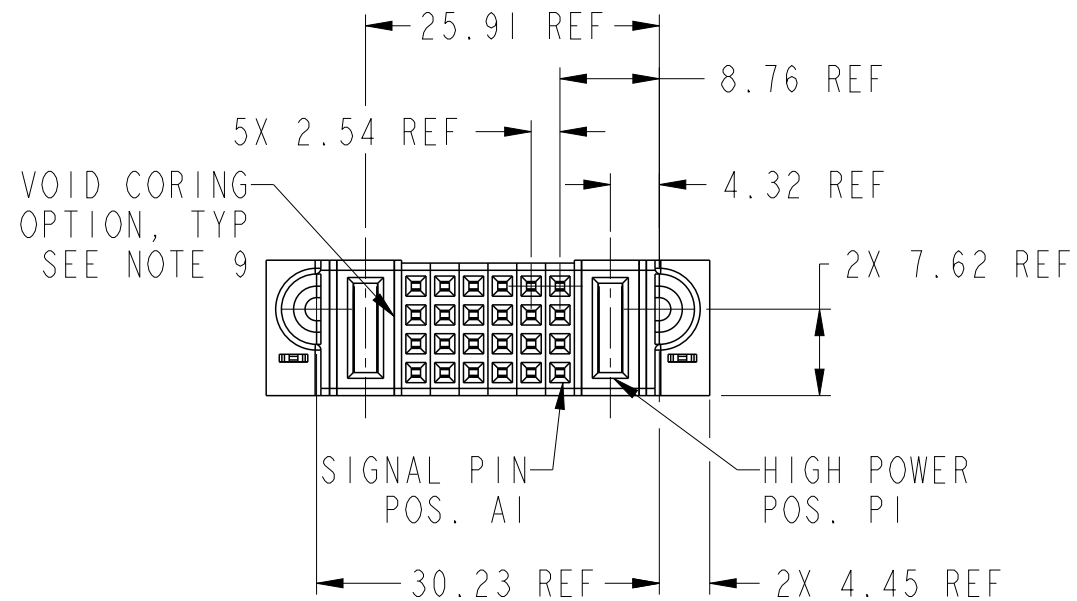

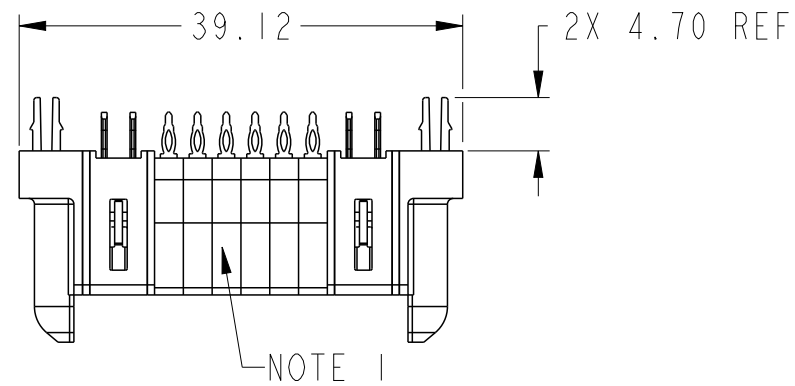

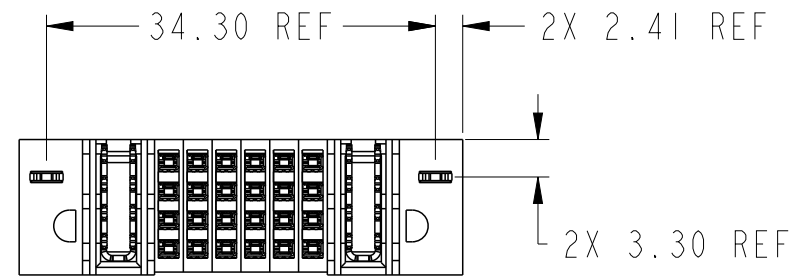




Copyright FCI.


PRODUCT NUMBER SEE SHEET 2



spec ref				dr		Helen Zhang		2013/06/20		projection				size		A3		scale		3:2											
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Xie Bob		2014/01/10						ecn no		-													
ASME Y14.5						chr		-		-		rel level				Released															
						appr		Pei-Ming Zheng		2014/01/10		product family				PowerBlade+															
surface				linear		0.X		±0.50				title				IHP + 24S + IHP				dwg no				10106269-2006202				rev		A	
				0.XX		±0.25																									
ASME Y14.5				0.XXX		±0.10																									
		angular		0°		±2°		www.fci.com		cat. no.				Product - Customer Drw				sheet 1 of 3													



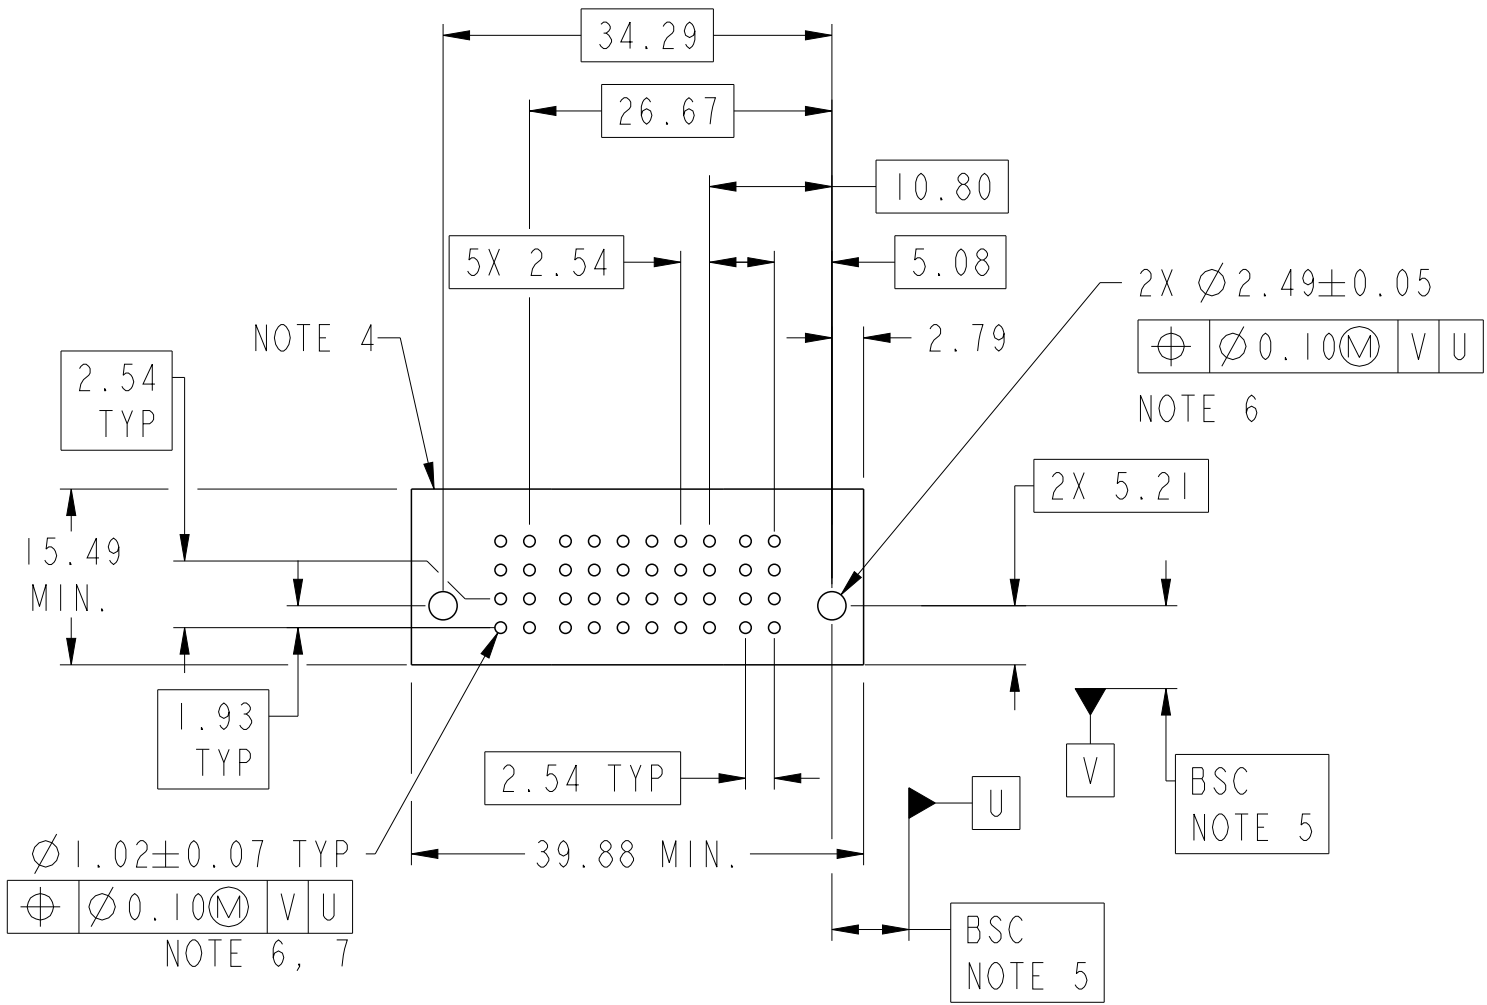


PRODUCT NO.	ROW S		P	SIGNAL							P	
		E1	P2	6	5	4	3	2	1	P1	E2	
10106269-2006202LF	D C B A		 HG	F	F	F	F	F	F	 HG		



dr	Helen Zhang	2013/06/20	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2	
eng	Xie Bob	2014/01/10			ecn no	-			
chr	-	-							
appr	Pei-Ming Zheng	2014/01/10	product family	PowerBlade+	rel level	Released			
<div></div>		title	IHP + 24S + IHP VT PRESSFIT RECEPTACLE		dwg no	10106269-2006202		rev	A
www.fci.com		cat. no.		Product - Customer Drw			sheet 2 of 3		

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
  - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
  - SIGNAL CONTACT - COPPER ALLOY.
  - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10123565
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL  
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE  
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE  
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Helen Zhang	2013/06/20	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	scale
eng	Xie Bob	2014/01/10			A3	1:1
chr	-	-			ecn no	-
appr	Pei-Ming Zheng	2014/01/10	product family	PowerBlade+	rel level	Released
<div></div>		IHP + 24S + IHP			dwg no	rev
		VT PRESSFIT RECEPTACLE			10106269-2006202	A
www.fci.com		cat. no.	Product - Customer Drw			sheet 3 of 3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10106269-2006202LF](#)