
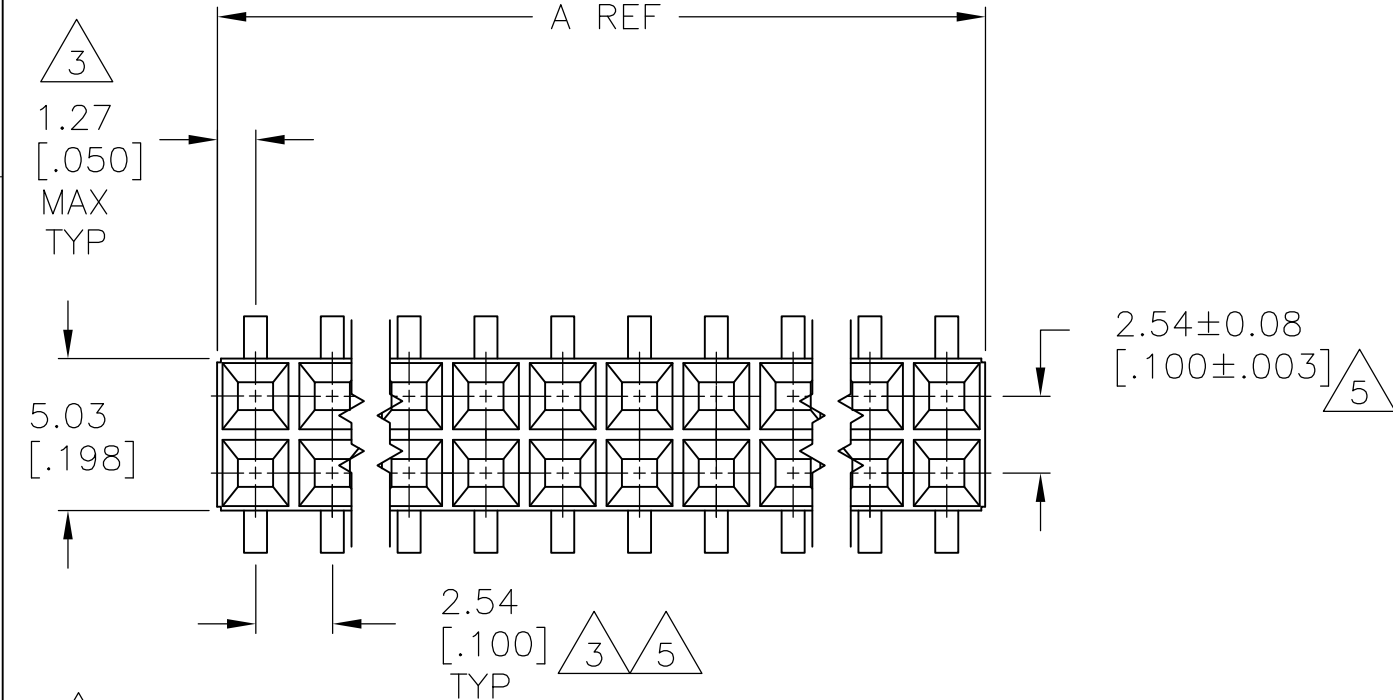


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00						
			AB5	REVISED PER ECO-13-005565	02APR13	KH	JO

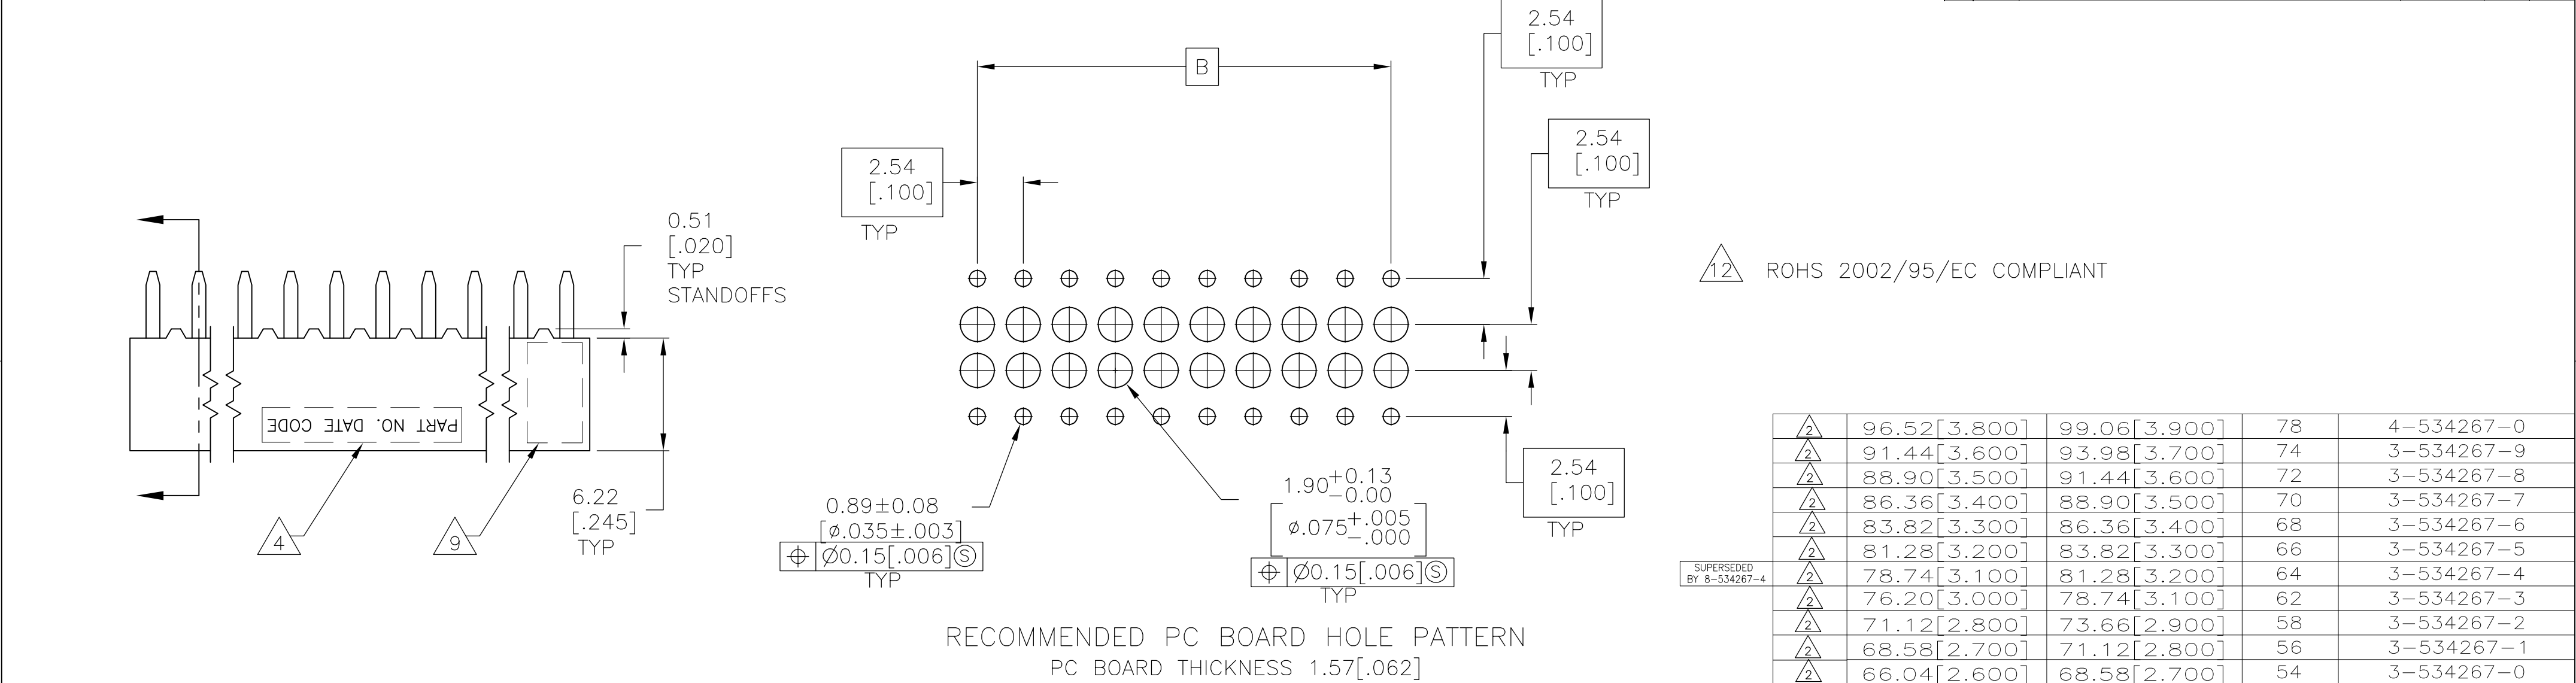

- 1

HOUSING: FLAME RETARDANT, GLASS FILLED, POLYESTER, COLOR: BLACK. CONTACT: PHOSPHOR BRONZE
- 2

CONTACT: DUPLEX PLATED 0.76µm[.000030] GOLD IN CONTACT AREA, 3.81–7.62µm[.000150–.000300] BRIGHT TIN–LEAD ON LEADS, ALL OVER 1.27µm[.000050] MINIMUM NICKEL
- 3

THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY – NOT TO CONTACT LOCATIONS
- 4

PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN,EITHER SIDE.
- 5

TOLERANCE IS NON–CUMULATIVE.
- 6

2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE CONNECTIVITY LOGO.
- 7

POINT–OF–MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- 8

POINT–OF–CONTACT DIMENSION.
- 9

TE CONNECTIVITY TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- 10

NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 11

CONTACT:DUPLEX PLATED 0.76 MICROMETERS(.000030) MIN GOLD IN CONTACT AREA,3.81–7.62 MICROMETERS(.000150–.000300) MATTE TIN ON LEADS, ALL OVER 1.27 MICROMETERS (.000050) MINIMUM NICKEL.

2	96.52[3.800]	99.06[3.900]	78	4–534267–0
2	91.44[3.600]	93.98[3.700]	74	3–534267–9
2	88.90[3.500]	91.44[3.600]	72	3–534267–8
2	86.36[3.400]	88.90[3.500]	70	3–534267–7
2	83.82[3.300]	86.36[3.400]	68	3–534267–6
2	81.28[3.200]	83.82[3.300]	66	3–534267–5
2	78.74[3.100]	81.28[3.200]	64	3–534267–4
2	76.20[3.000]	78.74[3.100]	62	3–534267–3
2	71.12[2.800]	73.66[2.900]	58	3–534267–2
2	68.58[2.700]	71.12[2.800]	56	3–534267–1
2	66.04[2.600]	68.58[2.700]	54	3–534267–0
2	63.50[2.500]	66.04[2.600]	52	2–534267–9
2	55.88[2.200]	58.42[2.300]	46	2–534267–8
2	53.34[2.100]	55.88[2.200]	44	2–534267–7
2	50.80[2.000]	53.34[2.100]	42	2–534267–6
2	45.72[1.800]	48.26[1.900]	38	2–534267–5
2	40.64[1.600]	43.18[1.700]	34	2–534267–4
2	38.10[1.500]	40.64[1.600]	32	2–534267–3
2	33.02[1.300]	35.56[1.400]	28	2–534267–2
2	25.40[1.000]	27.94[1.100]	22	2–534267–1
2	12.70[.500]	15.24[.600]	12	2–534267–0
2	17.78[.700]	20.32[.800]	16	1–534267–9
2	60.96[2.400]	63.50[2.500]	50	1–534267–8
2	2.54[.100]	5.08[.200]	4	1–534267–7
2	93.98[3.700]	96.52[3.800]	76	1–534267–6
2	43.18[1.700]	45.72[1.800]	36	1–534267–5
2	5.08[.200]	7.62[.300]	6	1–534267–4
2		2.54[.100]	2	1–534267–3
2	35.56[1.400]	38.10[1.500]	30	1–534267–2
2	58.42[2.300]	60.96[2.400]	48	1–534267–1
2	20.32[.800]	22.86[.900]	18	1–534267–0
2	27.94[1.100]	30.48[1.200]	24	534267–9
2	73.66[2.900]	76.20[3.000]	60	534267–8
2	48.26[1.900]	50.80[2.000]	40	534267–7
2	30.48[1.200]	33.02[1.300]	26	534267–6
2	7.62[.300]	10.16[.400]	8	534267–5
2	99.06[3.900]	101.60[4.000]	80	534267–4
2	10.16[.400]	12.70[.500]	10	534267–3
2	22.86[.900]	25.40[1.000]	20	534267–2
2	15.24[.600]	17.78[.700]	14	534267–1

SUPERSEDED BY 8-534267-4

10 OBSOLETE

FINISH	B	A	NO OF POSN	PART NUMBER
--------	---	---	------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± 0.13[.005]
3 PLC	± -
4 PLC	± -
ANGLES	± -

FINISH

11 2

DWN
M.BINNER
06NOV2002

CHK
J.OLSON
06NOV02

APVD
J.OLSON
06NOV02

PRODUCT SPEC
108-25022

APPLICATION SPEC
114-25018

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
RECEPTACLE ASSEMBLY, MOD IV,
DOUBLE ROW, DUAL ENTRY, .100X.100CL,
VERTICAL MOUNT, AMPMODU

SIZE
A2

CAGE CODE
00779

DRAWING NO
534267

RESTRICTED TO
-

SCALE
4:1

SHEET
1 of 2


REV
AB5

1471-9 (3/11)

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

		$\triangle_{11}$	96.52[3.800]	99.06[3.900]	78	$\triangle_{12}$	9-534267-0
		$\triangle_{11}$	91.44[3.600]	93.98[3.700]	74	$\triangle_{12}$	8-534267-9
		$\triangle_{11}$	88.90[3.500]	91.44[3.600]	72	$\triangle_{12}$	8-534267-8
		$\triangle_{11}$	86.36[3.400]	88.90[3.500]	70	$\triangle_{12}$	8-534267-7
		$\triangle_{11}$	83.82[3.300]	86.36[3.400]	68	$\triangle_{12}$	8-534267-6
		$\triangle_{11}$	81.28[3.200]	83.82[3.300]	66	$\triangle_{12}$	8-534267-5
		$\triangle_{11}$	78.74[3.100]	81.28[3.200]	64	$\triangle_{12}$	8-534267-4
		$\triangle_{11}$	76.20[3.000]	78.74[3.100]	62	$\triangle_{12}$	8-534267-3
		$\triangle_{11}$	71.12[2.800]	73.66[2.900]	58	$\triangle_{12}$	8-534267-2
		$\triangle_{11}$	68.58[2.700]	71.12[2.800]	56	$\triangle_{12}$	8-534267-1
		$\triangle_{11}$	66.04[2.600]	68.58[2.700]	54	$\triangle_{12}$	8-534267-0
		$\triangle_{11}$	63.50[2.500]	66.04[2.600]	52	$\triangle_{12}$	7-534267-9
		$\triangle_{11}$	55.88[2.200]	58.42[2.300]	46	$\triangle_{12}$	7-534267-8
		$\triangle_{11}$	53.34[2.100]	55.88[2.200]	44	$\triangle_{12}$	7-534267-7
		$\triangle_{11}$	50.80[2.000]	53.34[2.100]	42	$\triangle_{12}$	7-534267-6
		$\triangle_{11}$	45.72[1.800]	48.26[1.900]	38	$\triangle_{12}$	7-534267-5
		$\triangle_{11}$	40.64[1.600]	43.18[1.700]	34	$\triangle_{12}$	7-534267-4
		$\triangle_{11}$	38.10[1.500]	40.64[1.600]	32	$\triangle_{12}$	7-534267-3
		$\triangle_{11}$	33.02[1.300]	35.56[1.400]	28	$\triangle_{12}$	7-534267-2
		$\triangle_{11}$	25.40[1.000]	27.94[1.100]	22	$\triangle_{12}$	7-534267-1
		$\triangle_{11}$	12.70[.500]	15.24[.600]	12	$\triangle_{12}$	7-534267-0
		$\triangle_{11}$	17.78[.700]	20.32[.800]	16	$\triangle_{12}$	6-534267-9
		$\triangle_{11}$	60.96[2.400]	63.50[2.500]	50	$\triangle_{12}$	6-534267-8
$\triangle_{10}$		$\triangle_{11}$	2.54[.100]	5.08[.200]	4	$\triangle_{12}$	6-534267-7
		$\triangle_{11}$	93.98[3.700]	96.52[3.800]	76	$\triangle_{12}$	6-534267-6
		$\triangle_{11}$	43.18[1.700]	45.72[1.800]	36	$\triangle_{12}$	6-534267-5
	$\triangle_{10}$	$\triangle_{11}$	5.08[.200]	7.62[.300]	6	$\triangle_{12}$	6-534267-4
$\triangle_{10}$	OBSELETE	$\triangle_{11}$	-	2.54[.100]	2	$\triangle_{12}$ $\triangle_6$	6-534267-3
		$\triangle_{11}$	35.56[1.400]	38.10[1.500]	30	$\triangle_{12}$	6-534267-2
		$\triangle_{11}$	58.42[2.300]	60.96[2.400]	48	$\triangle_{12}$	6-534267-1
		$\triangle_{11}$	20.32[.800]	22.86[.900]	18	$\triangle_{12}$	6-534267-0
		$\triangle_{11}$	27.94[1.100]	30.48[1.200]	24	$\triangle_{12}$	5-534267-9
		$\triangle_{11}$	73.66[2.900]	76.20[3.000]	60	$\triangle_{12}$	5-534267-8
		$\triangle_{11}$	48.26[1.900]	50.80[2.000]	40	$\triangle_{12}$	5-534267-7
		$\triangle_{11}$	30.48[1.200]	33.02[1.300]	26	$\triangle_{12}$	5-534267-6
$\triangle_{10}$		$\triangle_{11}$	7.62[.300]	10.16[.400]	8	$\triangle_{12}$	5-534267-5
		$\triangle_{11}$	99.06[3.900]	101.60[4.000]	80	$\triangle_{12}$	5-534267-4
$\triangle_{10}$		$\triangle_{11}$	10.16[.400]	12.70[.500]	10	$\triangle_{12}$	5-534267-3
		$\triangle_{11}$	22.86[.900]	25.40[1.000]	20	$\triangle_{12}$	5-534267-2
		$\triangle_{11}$	15.24[.600]	17.78[.700]	14	$\triangle_{12}$	5-534267-1
		FINISH	B	A	NO OF POSN		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 06NOV2002		 TE Connectivity					
		CHK J.OLSON 06NOV02							
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, DUAL ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU					
		APVD J.OLSON 06NOV02							
		PRODUCT SPEC 108-25022							
		APPLICATION SPEC 114-25018							
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± ±		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL		FINISH		WEIGHT		A2 00779 C=534267		-	
				CUSTOMER DRAWING		SCALE 1:1		SHEET 2 of 2	REV AB5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-534267-1](#)