
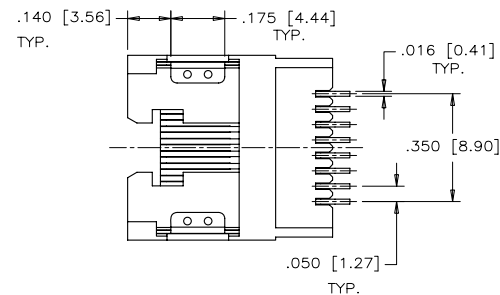



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	SEP 07.06	L.C
B		PROPOSAL	AUG 26.08	L.C
C		PROPOSAL	MAY 5.10	L.C

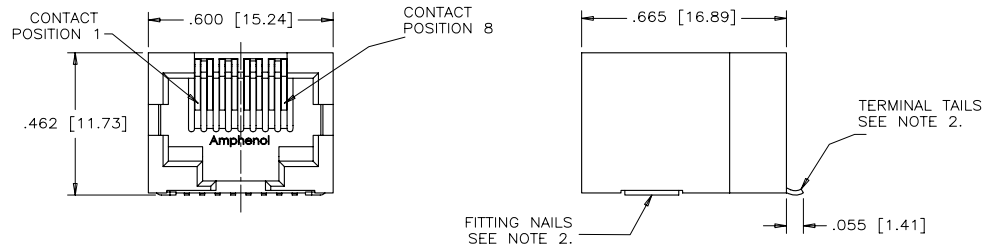

AMPHENOL PART NO.: R J L S E - 4 X 0 8 X - 0 1 T

GOLD PLATING
 0 = GOLD FLASH
 1 = 15 MICRO" GOLD PLATING
 2 = 30 MICRO" GOLD PLATING
 3 = 50 MICRO" GOLD PLATING

HOUSING OPTION
 1 = BLACK HOUSING
 2 = YELLOW HOUSING

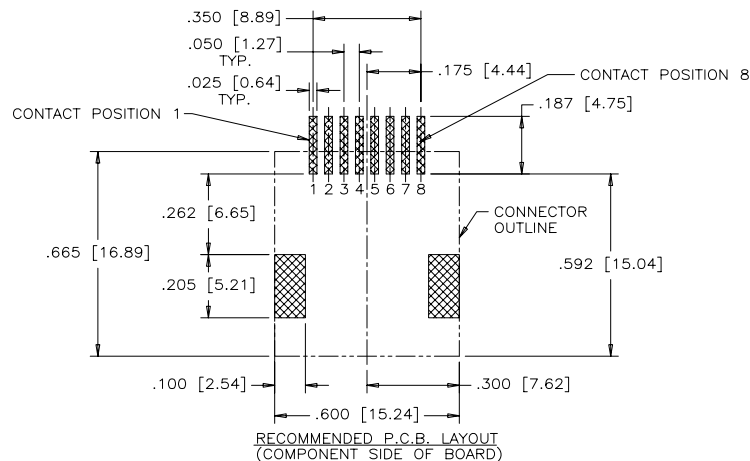

NOTES:

1. MATERIALS:

HOUSING: HIGH TEMPERATURE RESISTANT NYLON.
 FLAMMABILITY RATING UL 94V-0
 COLOUR: SEE AMPHENOL PART NUMBER SYSTEM FOR HOUSING OPTIONS


CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING ON MATING AREA : SEE AMPHENOL PART NUMBER SYSTEM FOR PLATING OPTIONS.
 50 MICRO" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
 100 MICRO" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

2. COPLANARITY SPECIFICATION:

WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10].

DRAWN	Chigow	DATE	SEP07.06	Amphenol Canada Corp.	
DESIGNED					
CHECKED	L.CHAN	SEP07.06		TITLE SURFACE MOUNT MODULAR JACK 8 POSITION, 8 CONTACT, WITHOUT SHIELD, WITH TAPE & REEL PACKING - RoHS COMPLIANT	
I. E. APPRD.	Oyang	SEP07.06			
Q. A. APPRD.				DWG. DRAWING NO. P-RJLSE-4X08X-01T	
DWG. APPRD.					
ENG. REL. NO.				REF. C	
REF.					
DIMENSIONS ARE IN	INCHES [mm]	CODE ID. NO.	03554	SCALE	WT. ----- SURF. ----- SHEET 1 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

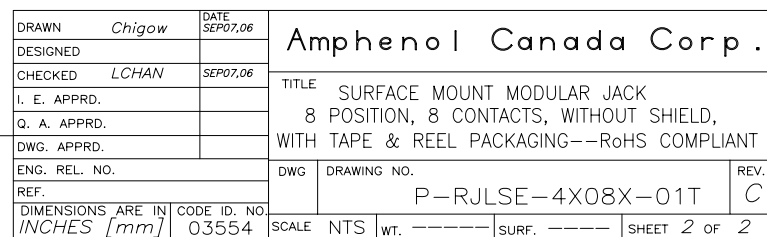

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RJLSE6206101](#) [RJLSE4308101T](#) [RJLSE4108101](#) [RJLSE4308101](#) [RJLSE4108101T](#) [RJLSE4008101](#)
[RJLSE4008101T](#)