



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
E	B		B	ECR-06-015596	03JUL06	JMS FWK

NOTES:

- 1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Ag PLATING
- 4 Ni PLATING
- 5 THIS ITEM MUST BE WHITE
- 6 ELECTRICAL CHARACTERISTICS
FREQUENCY RANGE: DC - 2 GHz
NOMINAL IMPEDANCE: 75 Ohm
INSULATION RESISTANCE: 5000 MOhm
WORKING VOLTAGE: 500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
CONTACT RESISTANCE: 1.50 mOhm Max
CENTRE CONTACT: 0.20 mOhm Max
VSWR @ 2GHz: 1.25:1 Max
INSERTION LOSS dB @ x 2 GHz: 0.30 Max
- 7 MECHANICAL CHARACTERISTICS
COUPLING RETENTION FORCE: 445N Min
CABLE RETENTION FORCE: 85N Min
CLAMP NUT RECOMMENDED TORQUE: 4N
DURABILITY: 500 Cycles Min
- 8 ENVIRONMENTAL CHARACTERISTICS
OPERATING TEMPERATURE: -65 to +165 DegC
- 9 FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- 10 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

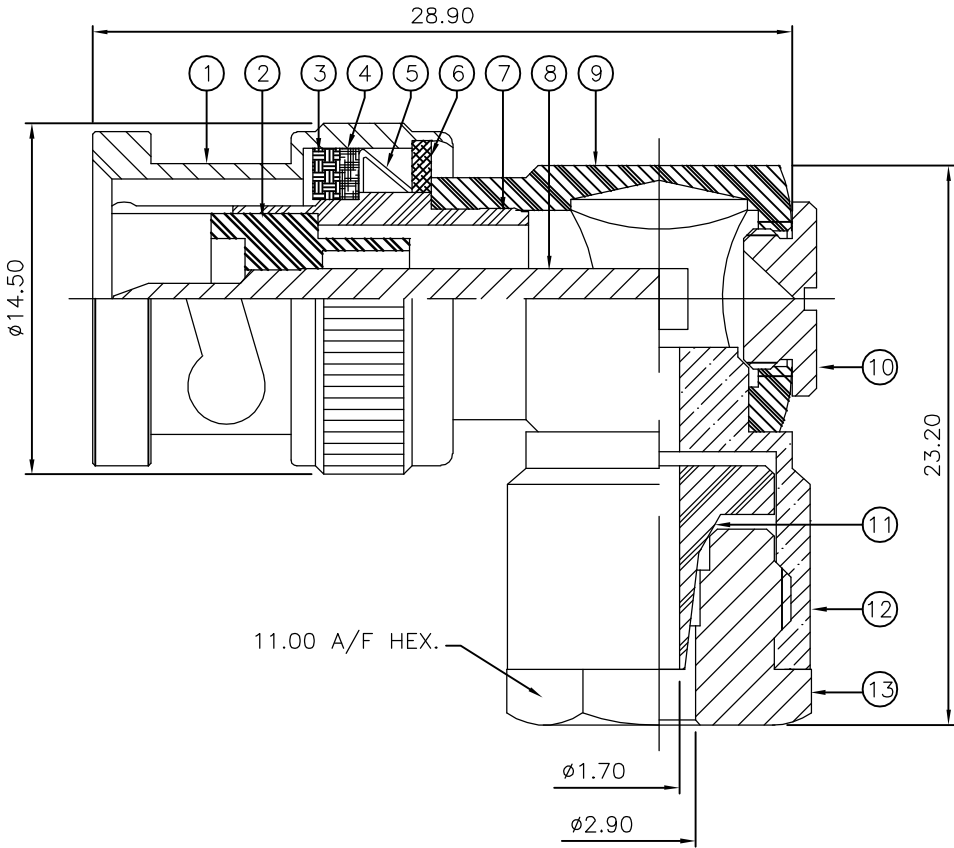

RECOMMENDED
CABLE STRIPPING DIM'S



		1	1	BRASS	3	CLAMP NUT	13
		1	1	BRASS	3	CHASSIS	12
		1	1	BRASS	3	SLEEVE	11
		1	1	BRASS	3	CAP	10
		1	1	BRASS	3	BODY II	9
		1	1	BRASS	3	CONTACT	8
		1	1	BRASS	3	BODY I	7
		1	1	BRASS	3	WASHER	6
		1	1	SPRING STEEL	4	SPRING	5
		1	1	BRASS	3	RETAINING RING	4
		1	1	SILICONE RUBBER	5	GASKET	3
		1	1	PTFE		INSULATION	2
		1	1	BRASS	3	SHELL	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM
		3	3				
QUANTITY PER ASSY				PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 03JUL06	tyco Electronics Tyco Electronics Corporation Bideford EX39 4HE				
DIMENSIONS: mm		CHK S.PARLOW 03JUL06					
		APVD F.WHEELER-KING 03JUL06	NAME BNC ELBOW WEDGE CLAMP PLUG 75 OHM RG179B/U, 187A/U, URM111				
		PRODUCT SPEC	-				
MATERIAL SEE TABLE		APPLICATION SPEC	-				
		411-3267	-				
		WEIGHT	-				
		CUSTOMER DRAWING	-				
			SIZE A3	CAGE CODE 00779	DRAWING NO C-1478125	RESTRICTED TO	
			SCALE NTS		SHEET 1 OF 1	REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1478125-0](#)