



Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-F-06374	J.M.	M.M.	19905.15					
3	RE-F-06522	J.M.	M.M.	99.9.7					

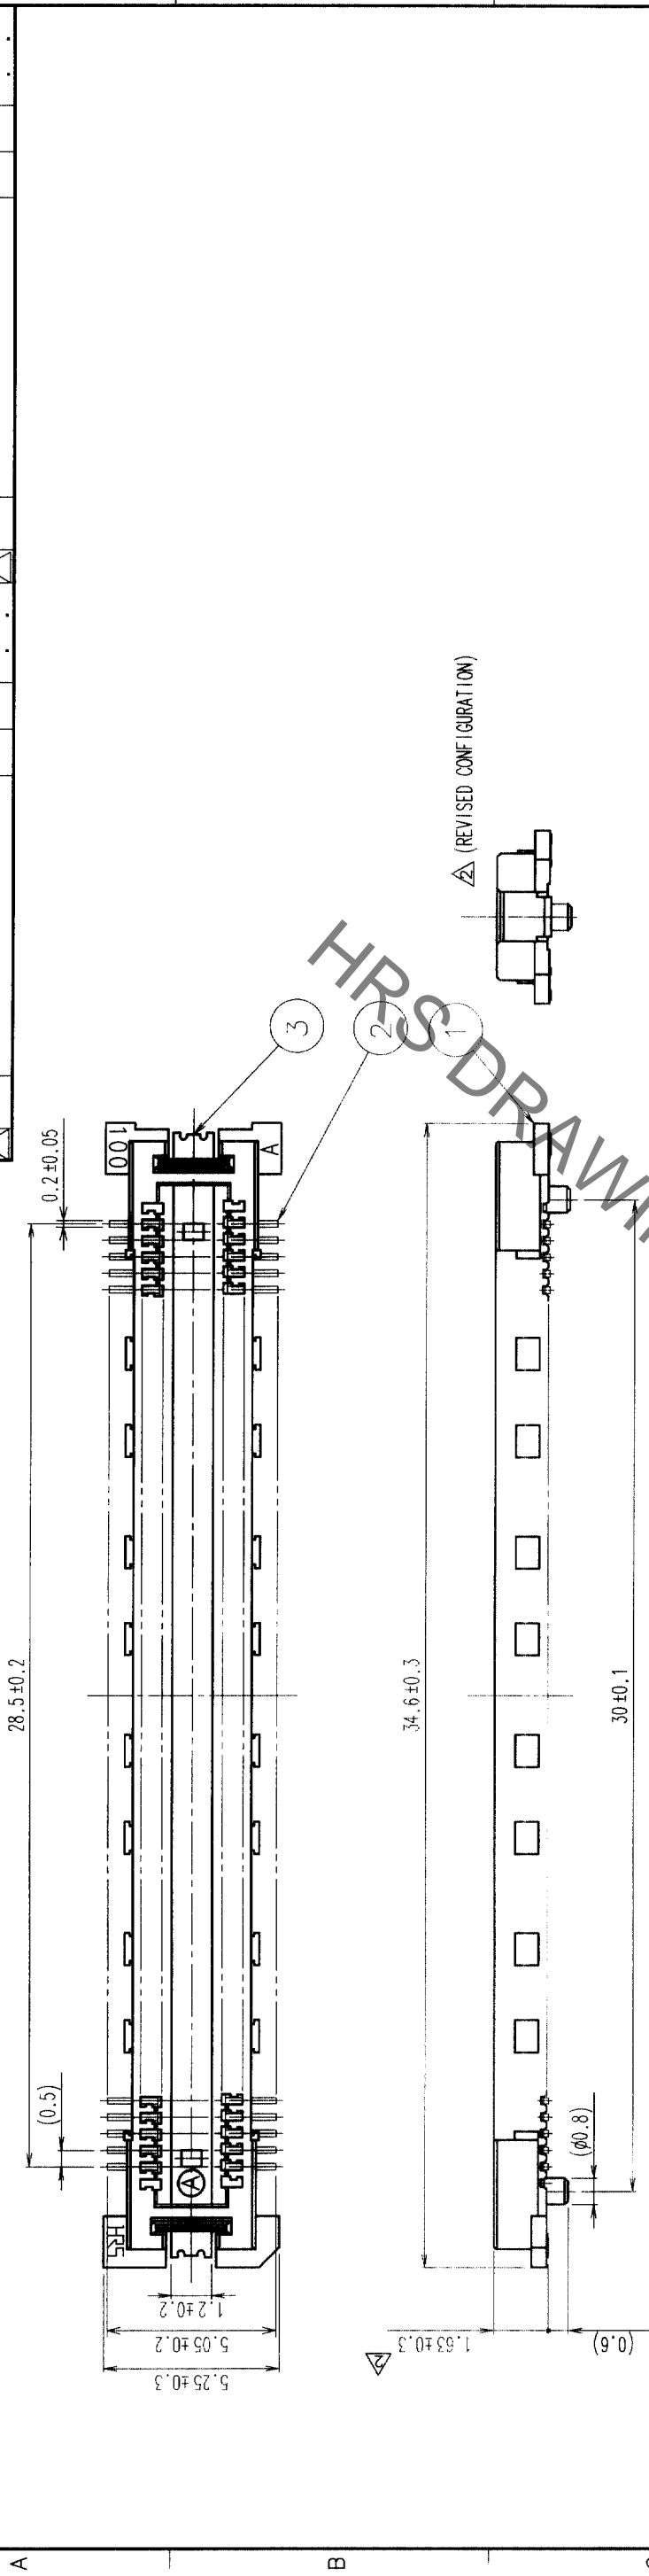

RECOMMENDED LAND PATTERN DIMENSION OF PCB

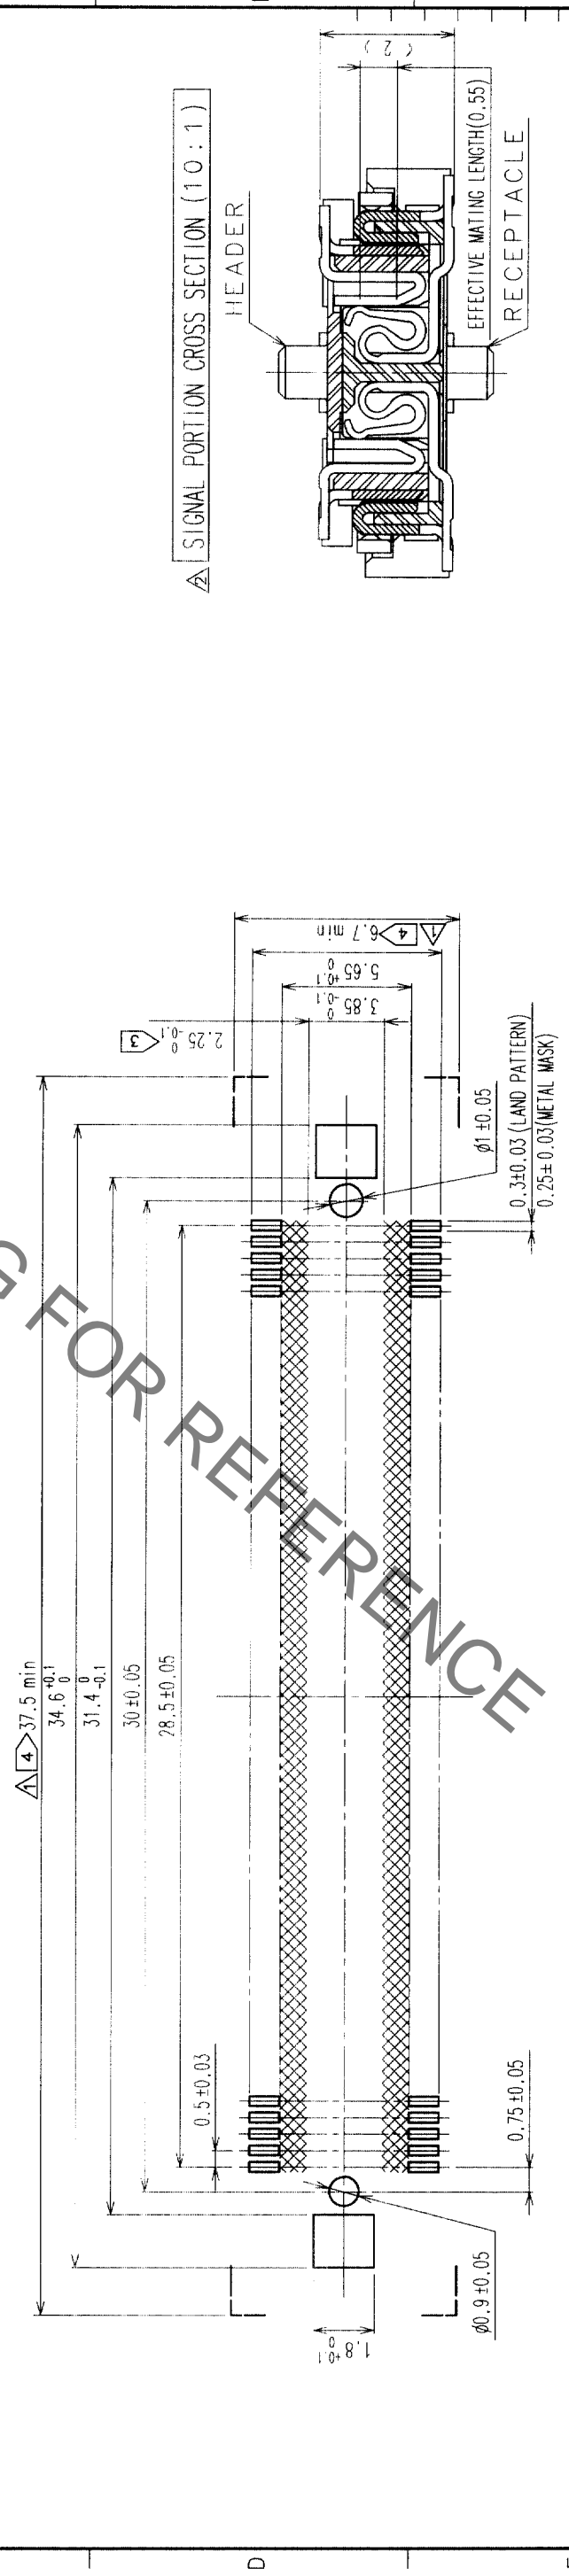

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL							
1	LCP	BEIGE UL94V-0							
NO.	MATERIAL	FINISH, REMARKS							
CODE NO. (OLD)	CL								
DRAWN	J. Matsukawa	DESIGNED	J. Matsukawa	CHECKED	Y. Yoshimuro	APPROVED	Y. Yoshimuro	RELEASED	
	990212		990212		990212		990212		990212
DRAWING NO.	EDC3-152102	PART NO.	FX11LA-116P-SV						
SCALE	5:1	CODE NO.	CL573-0044-7						
UNITS	mm								

TO	
PCK	