

Cable duct - CD 25X60 BU - 3240303

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Wiring channel, blue, consisting of upper and lower part, width: 25 mm, height: 60 mm, length: 2000 mm

Product Features

- Thanks to its leverage and special cutting geometry, the PPS CD cable duct cutter enables easy, burr-free cutting with minimum effort
- Easy, burr-free cutting with minimum effort using the CUTFOX-CD cable duct cutter
- Predetermined breaking point enables tool-free, burr-free removal of bars
- The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- Plastic body-bound rivets enable easy fixing of cable ducts using the rivet setting tool



Key Commercial Data

| | |
|------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 30 pc |
| Custom tariff number | 39259020 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|------------|---------|
| Length (b) | 2000 mm |
| Width (a) | 25 mm |
| Height | 60 mm |

Ambient conditions

| | |
|---------------------------------|-----------------|
| Ambient temperature (operation) | -5 °C ... 60 °C |
|---------------------------------|-----------------|

General

| | |
|------------|-----------|
| Color | blue |
| Components | Lead-free |

Cable duct - CD 25X60 BU - 3240303

Technical data

General

| | |
|--|-----|
| Flammability rating according to UL 94 | V0 |
| Material | PVC |

Standards and Regulations

| | |
|--|-----|
| Halogen-free | no |
| Connection in acc. with standard | CSA |
| Flammability rating according to UL 94 | V0 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140602 |
| eCl@ss 4.1 | 27140602 |
| eCl@ss 5.0 | 27140602 |
| eCl@ss 5.1 | 27140602 |
| eCl@ss 6.0 | 27400703 |
| eCl@ss 7.0 | 27400703 |
| eCl@ss 8.0 | 27400703 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000012 |
| ETIM 3.0 | EC000012 |
| ETIM 4.0 | EC000012 |
| ETIM 5.0 | EC000012 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30101815 |
| UNSPSC 7.0901 | 30101815 |
| UNSPSC 11 | 30101815 |
| UNSPSC 12.01 | 30101815 |
| UNSPSC 13.2 | 30101815 |

Approvals

Approvals

Approvals

UL Recognized / VDE Zeichengenehmigung / CSA


Cable duct - CD 25X60 BU - 3240303

Approvals

Ex Approvals

Approvals submitted

Approval details

UL Recognized 

VDE Zeichengenehmigung 

CSA 

Accessories

Accessories

Cover

Cover profile - CD COVER 25 BU - 3240330



Cover for cable duct, blue, width: 25 mm, length: 2000 mm

Filler plug

Fastening clip - RVT-PA 4 - 3240498



Plastic body-bound rivet, for hole diameter of 4 mm and a material thickness of 1.5 ... 6 mm

Cable duct - CD 25X60 BU - 3240303

Accessories

Fastening clip - RVT-PA 6 - 3240499



Plastic body-bound rivet, for hole diameter of 6 mm and a material thickness of 1.5 ... 6 mm

Riveting tools

Tool - UNIFOX-RVT P 4 - 1212478



Rivet setting tool, for use with RVT-PA 4 plastic body-bound rivets


Tool - UNIFOX-RVT P 6 - 1212509



Rivet setting tool, for use with RVT-PA 6 plastic body-bound rivets

Drawings

Dimensional drawing

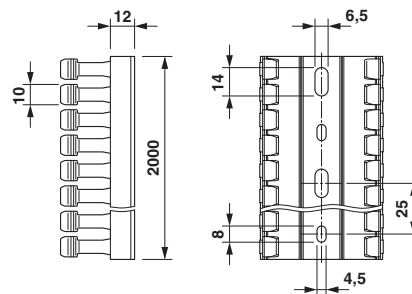

Base perforation according to DIN EN 50085

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

3240303