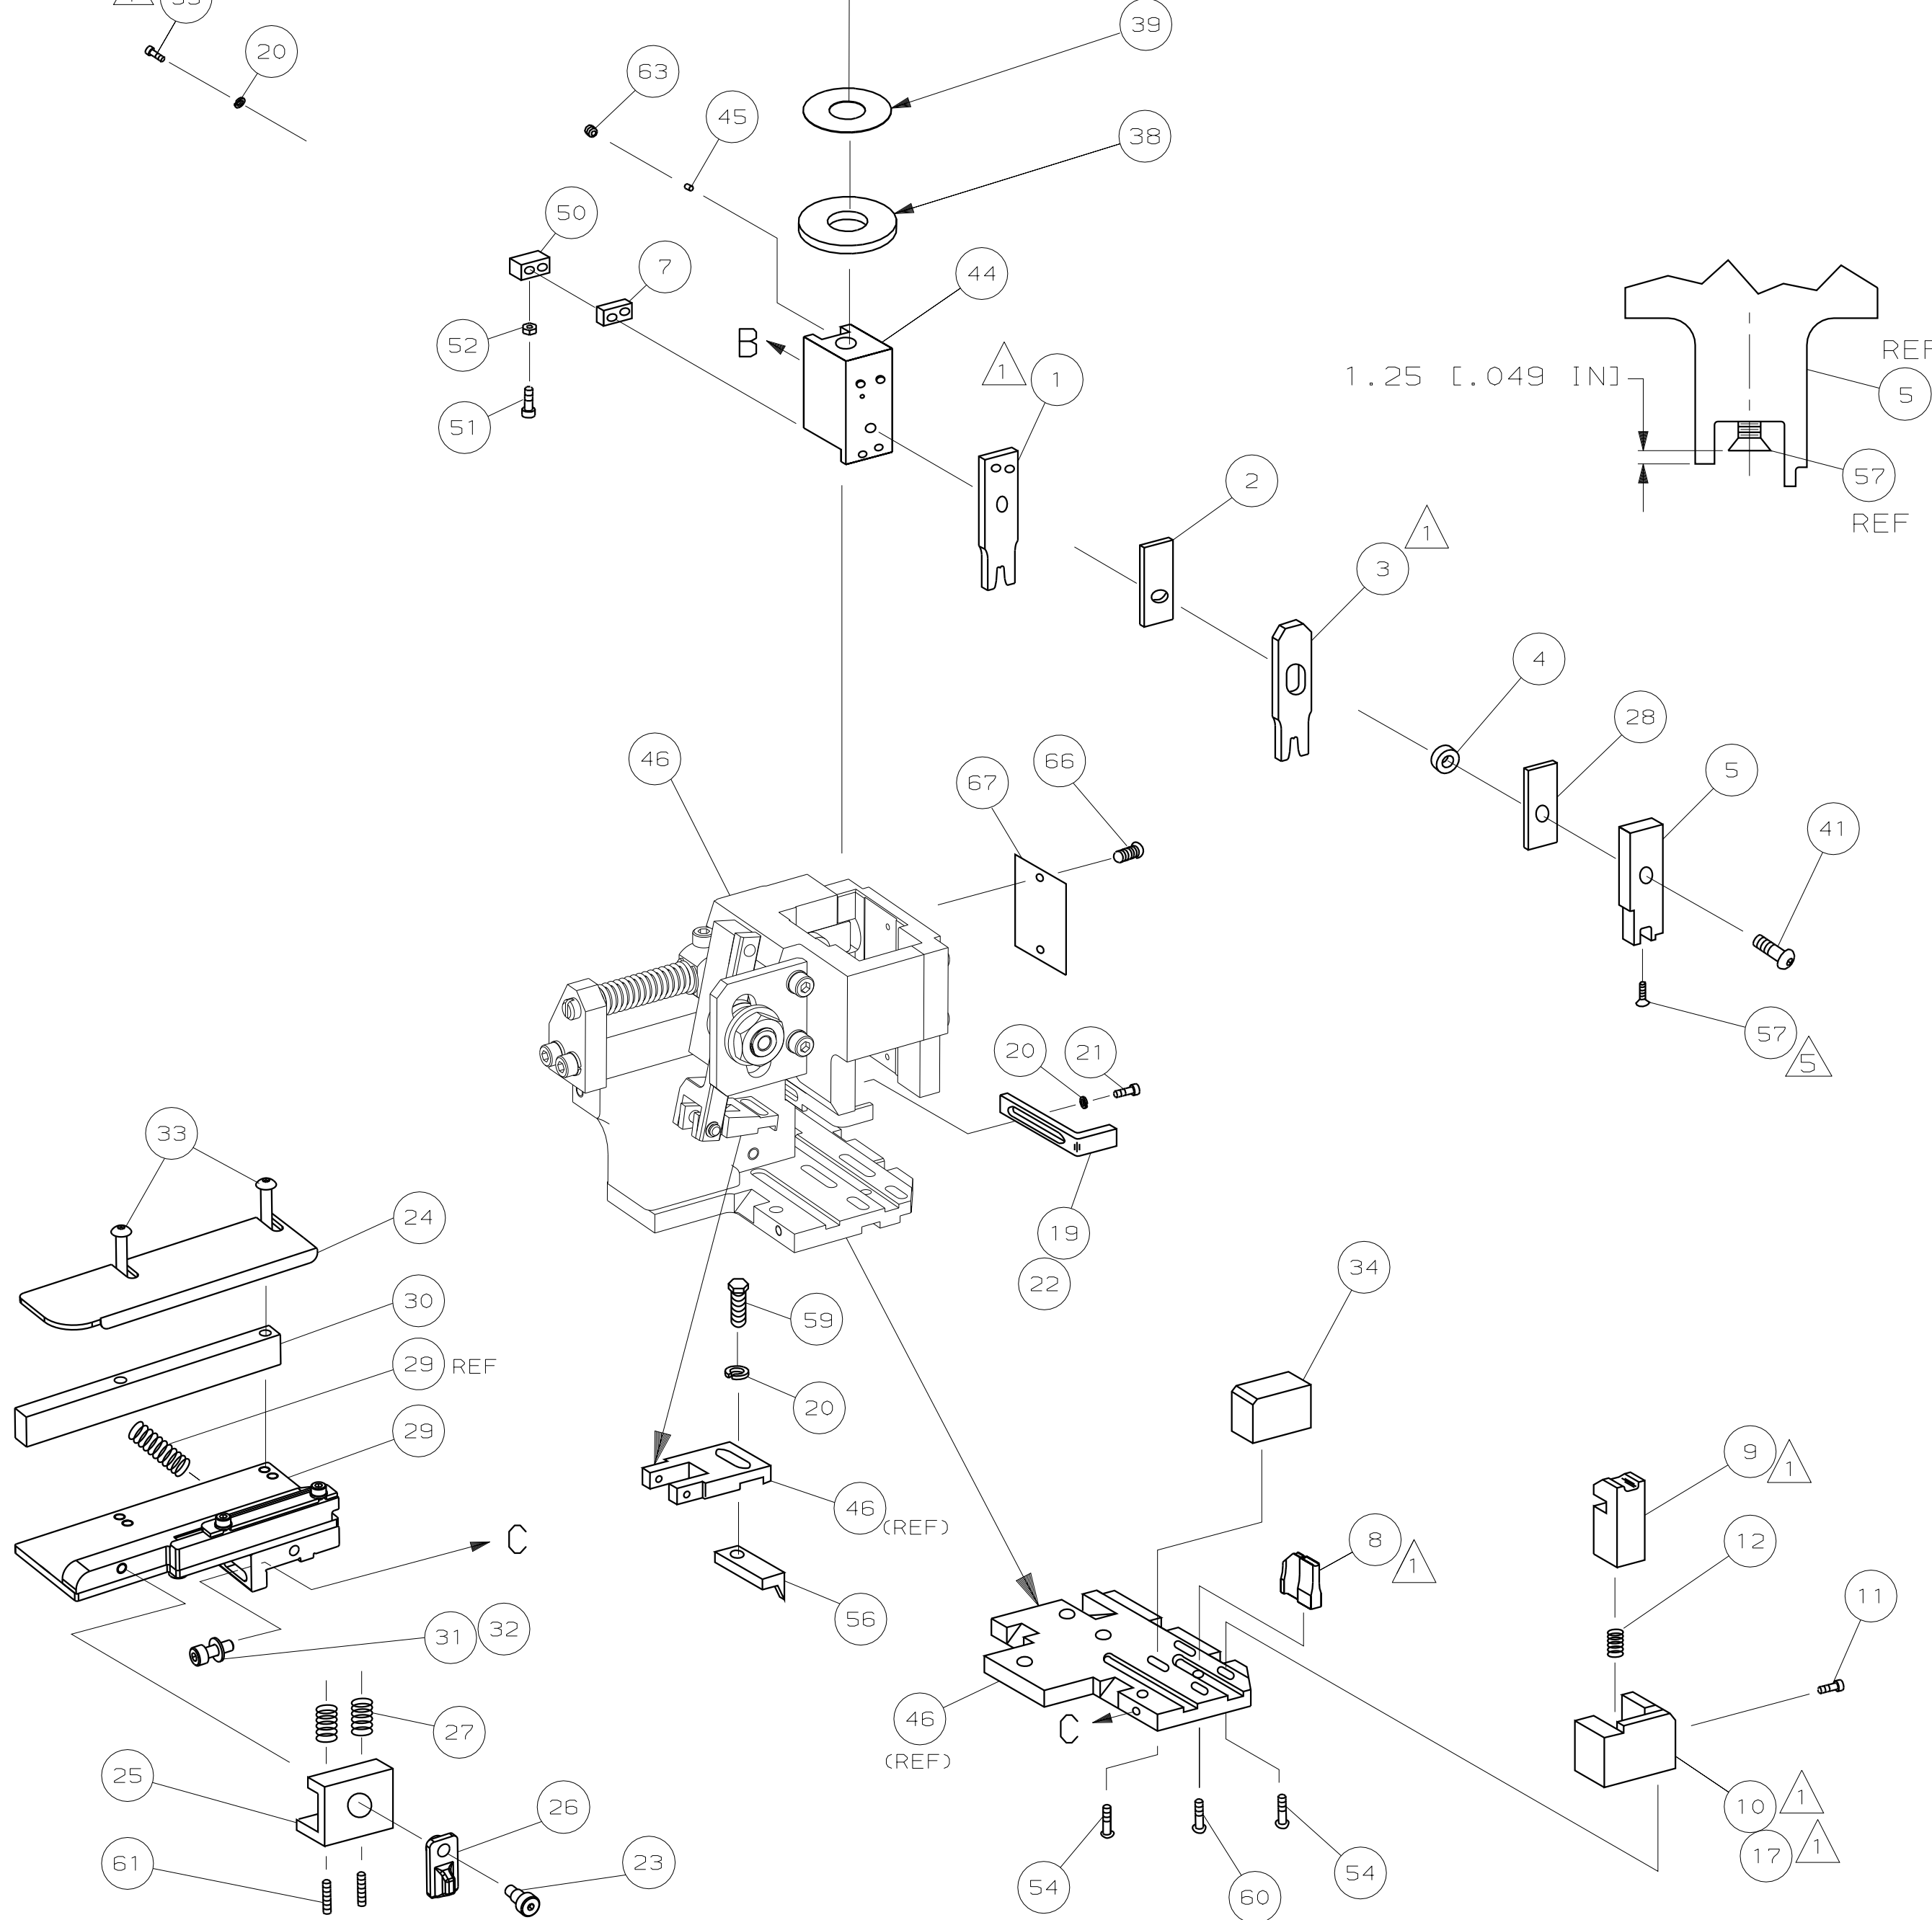


VIEW B ROTATED 180°

POST FEED 40 mm STROKE	POST FEED 30 mm STROKE	PRE FEED 30 mm STROKE	PRE FEED 40 mm STROKE

LOC
A
DIST
66

(44) (REF)
 (49)
 (47)

LOC
A
DIST
66

(44) (REF)
 (49)
 (47)

LOC
A
DIST
66

(44) (REF)
 (49)
 (48)

LOC
A
DIST
66

(44) (REF)
 (49)
 (48)

* WARNING:

ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

QTY REQD PER ASSY				PARTS LIST			
DIMENSIONS: mm [INCHES]		MATERIAL		HT TR		FIN	
DO NOT SCALE PRINT.		-		-		-	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR 21MAY03		APP 21MAY03		 Tyco Electronics Harrisburg, PA 17105-3608	
1 PLC DEC ±		L.L.OFHOUSE		F. BACKHURST			
2 PLC DEC ±		CHK -		REL 26JUN03			
3 PLC DEC ±		L.L.OFHOUSE		L.L.OFHOUSE			
ANGLES ±		NAME		FINE ADJ SIDE FD HD-I APPL		MACHINE REF	
SURF TEXTURE: ✓		SCALE -		DWG NO 1528189		HD-I APPL	
REMOVE BURRS, BREAK SHARP EDGES R. 38 MAX		D				SHEET 1 of 1	
CASE CODE 00779		CUSTOMER AND ASSEMBLY DRAWING					RESTRICTED TO -

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1528189-2](#)