

200mW High Speed SMD Switching Diode

FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: SOD-323F
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 4.85 ± 0.5 mg

| KEY PARAMETERS | | |
|----------------------|------------|------|
| PARAMETER | VALUE | UNIT |
| V_{RRM} | 100 | V |
| V_F at $I_F=100mA$ | 1.0 | V |
| T_J MAX. | 150 | °C |
| Package | SOD-323F | |
| Configuration | Single die | |

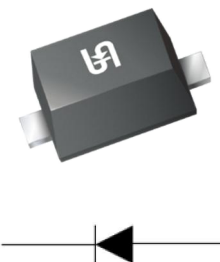

| ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | |
|---|-----------|--------------|--------------|--------------|------|
| PARAMETER | SYMBOL | 1N4148 WS | 1N4448 WS | 1N914B WS | UNIT |
| Marking code on the device | | S1 | S2 | S3 | |
| Power dissipation | P_D | 200 | | | mW |
| Repetitive peak reverse voltage | V_{RRM} | 100 | | | V |
| Forward current | I_F | 150 | | | mA |
| Non-repetitive peak forward current | I_{FRM} | 300 | | | mA |
| Junction temperature range | T_J | -65 to +150 | | | °C |
| Storage temperature range | T_{STG} | -65 to +150 | | | °C |

| THERMAL PERFORMANCE | | | |
|--|-----------------|-----|------|
| PARAMETER | SYMBOL | TYP | UNIT |
| Junction-to-ambient thermal resistance | $R_{\theta JA}$ | 625 | °C/W |

| ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | |
|---|--|---------------|------------|------------|---------------|
| PARAMETER | CONDITIONS | SYMBOL | MIN | MAX | UNIT |
| Forward voltage ⁽¹⁾ | 1N4448WS, 1N914BWS $I_F = 5 \text{ mA}, T_J = 25^\circ\text{C}$ | V_F | 0.62 | 0.72 | V |
| | 1N4148WS $I_F = 10 \text{ mA}, T_J = 25^\circ\text{C}$ | | - | 1.00 | |
| | 1N4448WS, 1N914BWS $I_F = 100 \text{ mA}, T_J = 25^\circ\text{C}$ | | - | 1.00 | |
| Reverse voltage | $I_R = 5 \mu\text{A}, T_J = 25^\circ\text{C}$ | V_R | 75 | - | V |
| | $I_R = 100 \mu\text{A}, T_J = 25^\circ\text{C}$ | | - | 100 | |
| Reverse current @ rated V_R ⁽²⁾ | $V_R = 20 \text{ V}, T_J = 25^\circ\text{C}$ | I_R | - | 25 | nA |
| | $V_R = 75 \text{ V}, T_J = 25^\circ\text{C}$ | | - | 5 | μA |
| Junction capacitance | 1 MHz, $V_R = 0 \text{ V}$ | C_J | - | 4 | pF |
| Reverse recovery time | $I_F = 10 \text{ mA}, I_R = 60 \text{ mA}, R_L = 100 \Omega,$ $I_{RR} = 1 \text{ mA}$ | t_{rr} | - | 4 | ns |

Notes:

1. Pulse test with $PW = 0.3 \text{ ms}$
2. Pulse test with $PW = 30 \text{ ms}$

| ORDERING INFORMATION | | |
|-----------------------------|----------------|----------------|
| PART NO. | PACKAGE | PACKING |
| 1N4148WS RRG | SOD-323F | 3K / 7" Reel |
| 1N4148WS RR | SOD-323F | 3K / 7" Reel |
| 1N4148WS R9G | SOD-323F | 10K / 13" Reel |
| 1N4148WS R9 | SOD-323F | 10K / 13" Reel |
| 1N4448WS RRG | SOD-323F | 3K / 7" Reel |
| 1N4448WS RR | SOD-323F | 3K / 7" Reel |
| 1N4448WS R9G | SOD-323F | 10K / 13" Reel |
| 1N4448WS R9 | SOD-323F | 10K / 13" Reel |
| 1N914BWS RRG | SOD-323F | 3K / 7" Reel |
| 1N914BWS RR | SOD-323F | 3K / 7" Reel |
| 1N914BWS R9G | SOD-323F | 10K / 13" Reel |
| 1N914BWS R9 | SOD-323F | 10K / 13" Reel |

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Forward Voltage VS. Forward Current

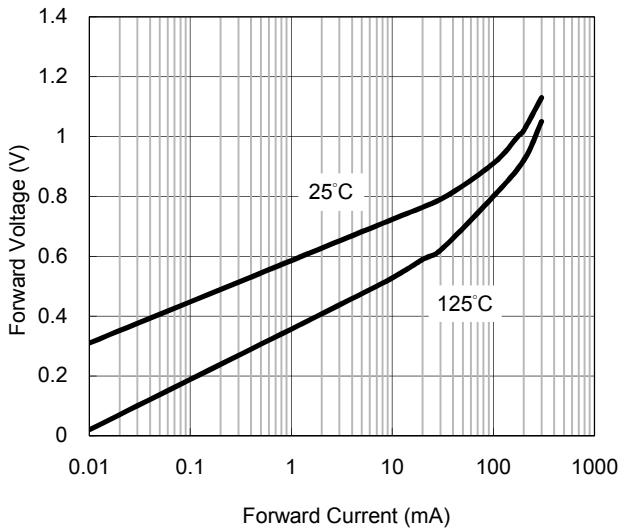


Fig. 2 Reverse Current vs Reverse Voltage

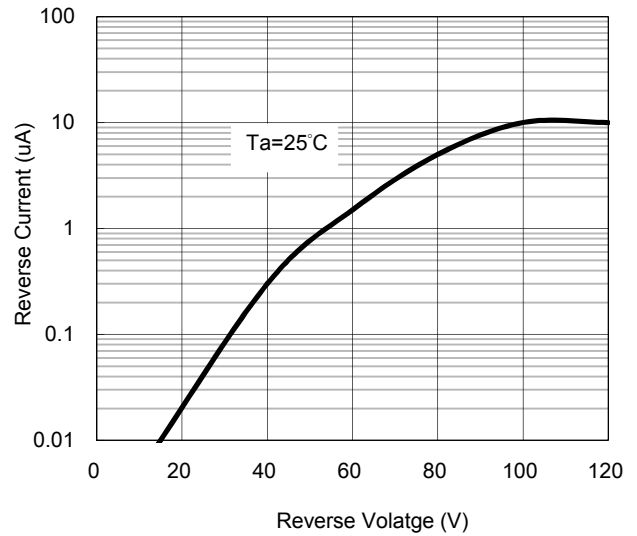


Fig. 3 Admissible Power Dissipation Curve



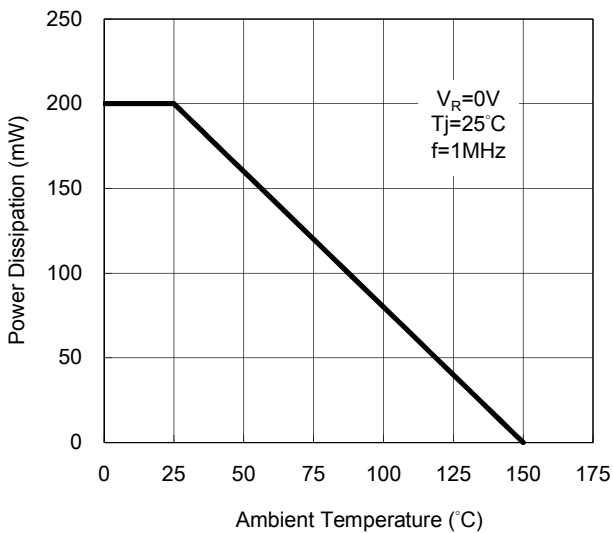


Fig. 4 Typical Junction Capacitance

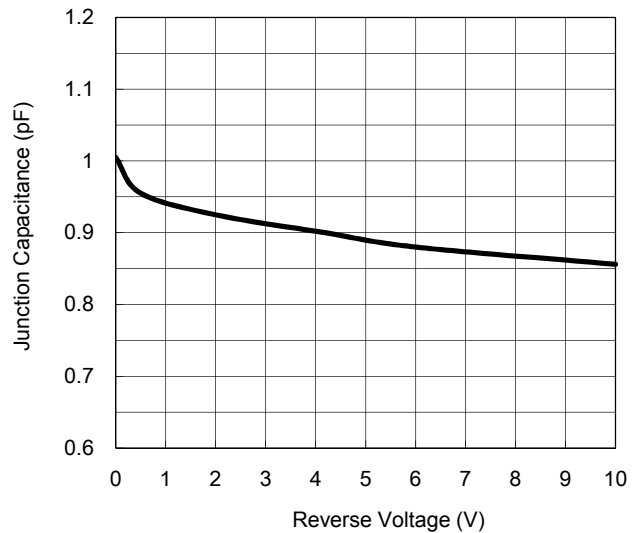


PACKAGE OUTLINE DIMENSION

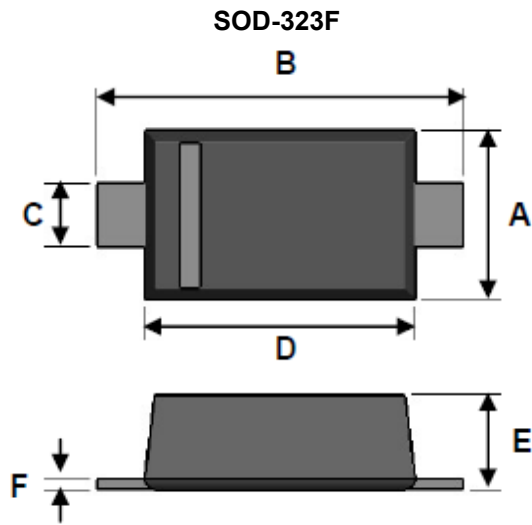

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min | Max | Min | Max |
| A | 1.15 | 1.35 | 0.045 | 0.053 |
| B | 2.30 | 2.80 | 0.091 | 0.110 |
| C | 0.25 | 0.40 | 0.010 | 0.016 |
| D | 1.60 | 1.80 | 0.063 | 0.071 |
| E | 0.80 | 1.10 | 0.031 | 0.043 |
| F | 0.05 | 0.25 | 0.002 | 0.010 |

SUGGEST PAD LAYOUT

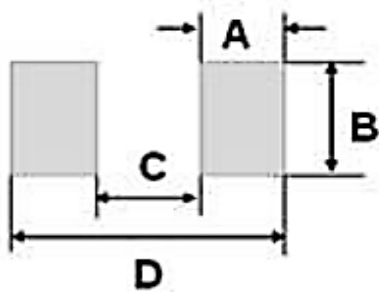

| DIM. | Unit (mm) | Unit (inch) |
|------|-----------|-------------|
| | Typ. | Typ. |
| A | 0.63 | 0.025 |
| B | 0.83 | 0.033 |
| C | 1.60 | 0.063 |
| D | 2.86 | 0.113 |

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[1N4148WS](#) [1N4148WS RRG](#) [1N4148WS RR](#)