

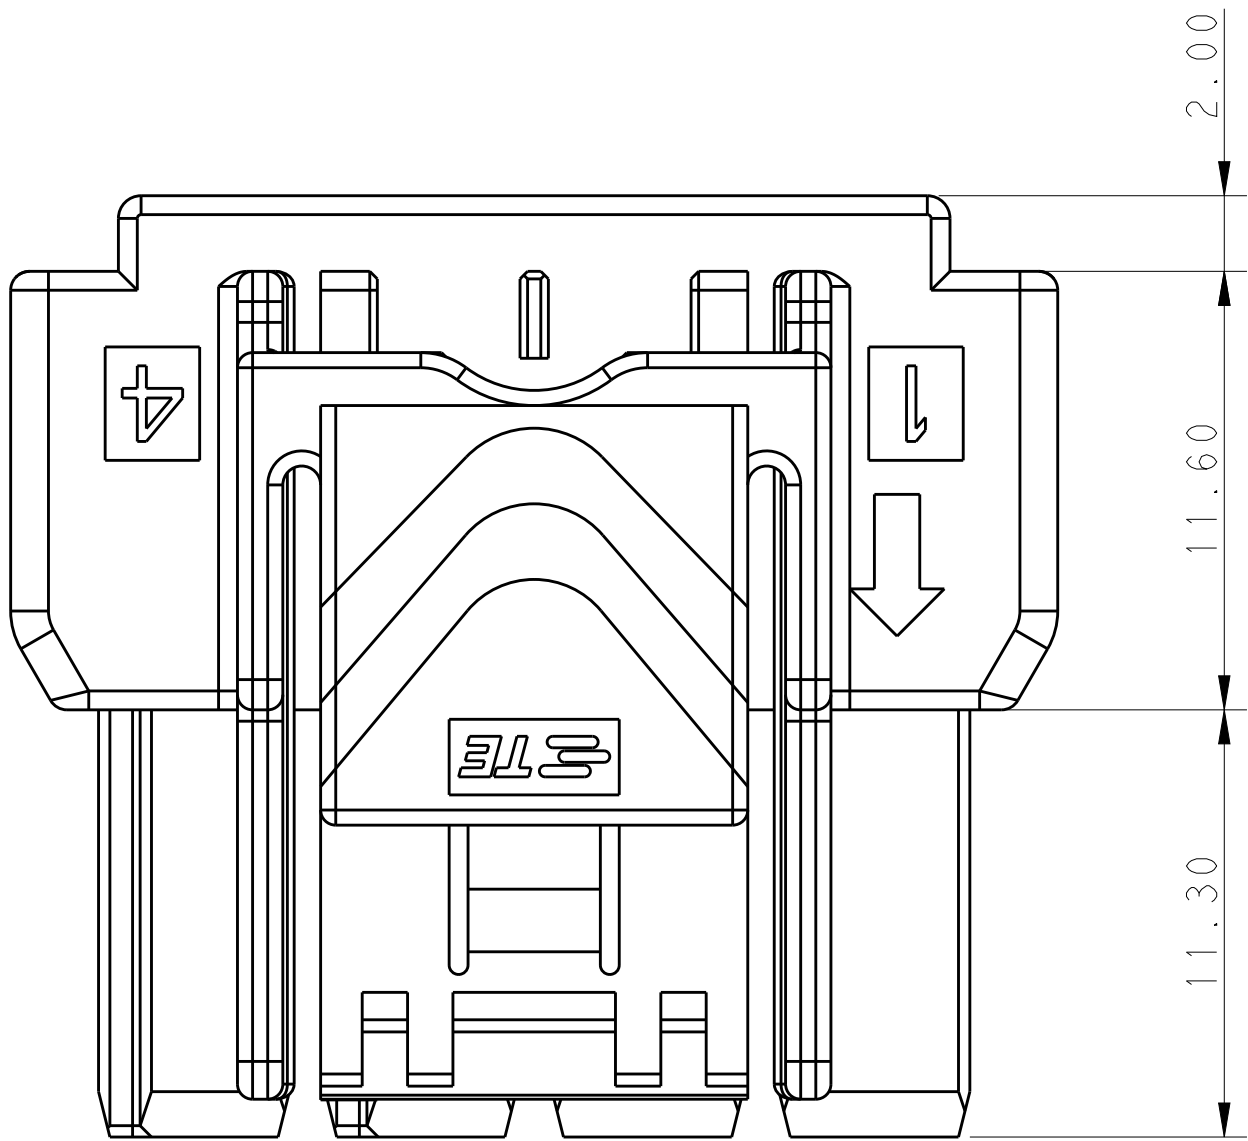
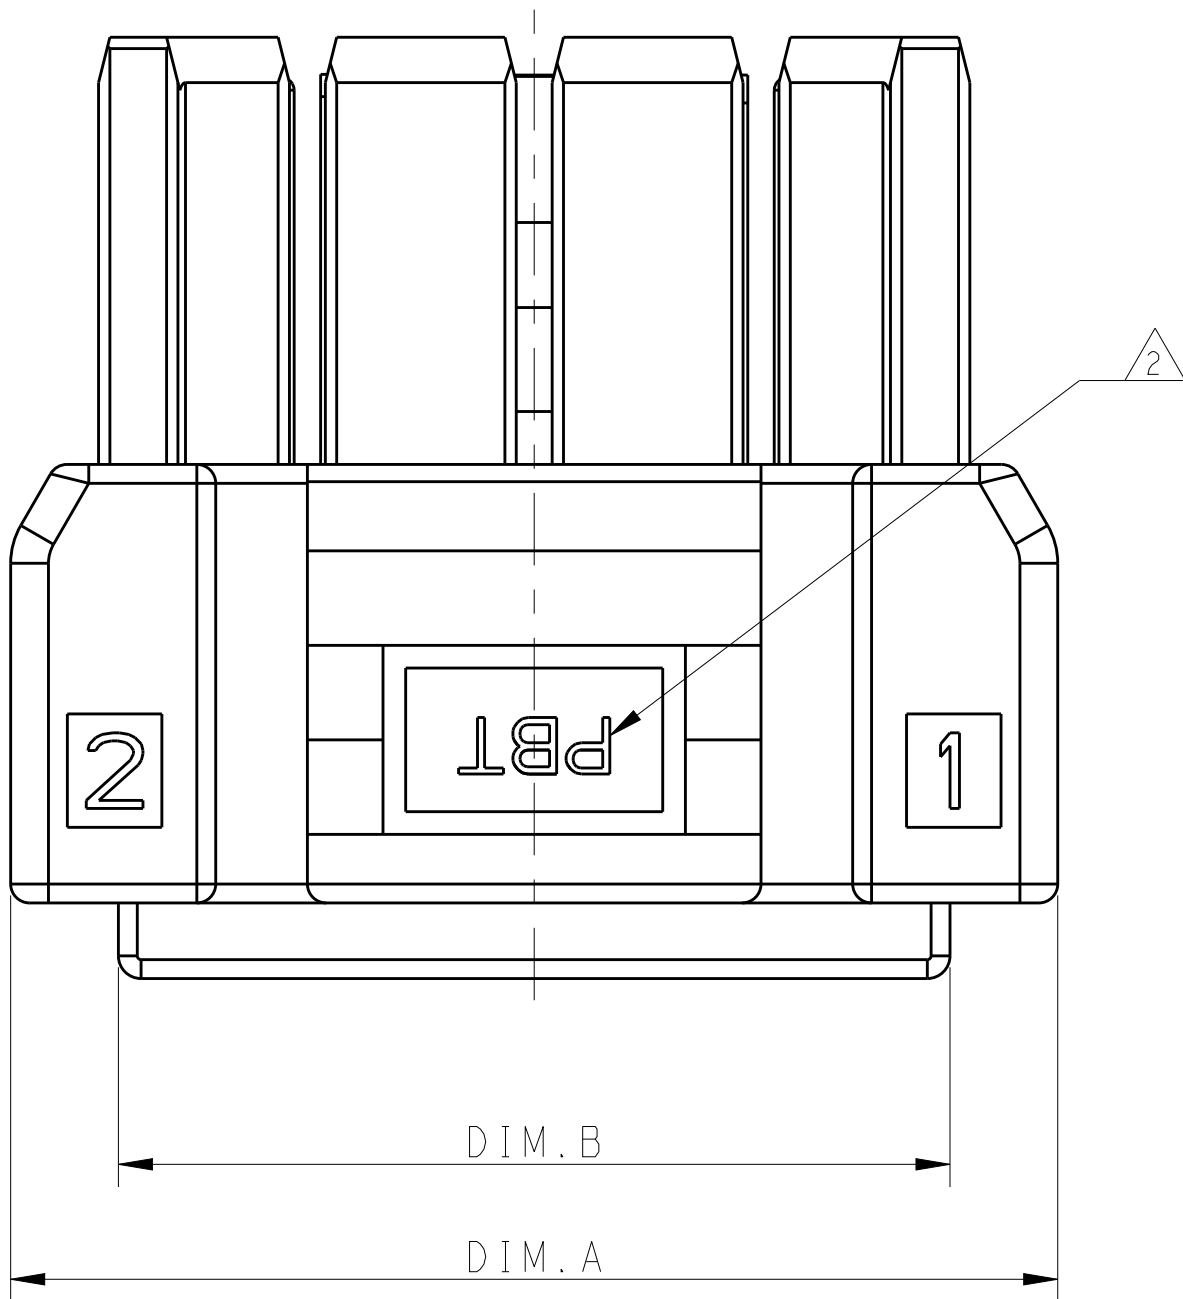
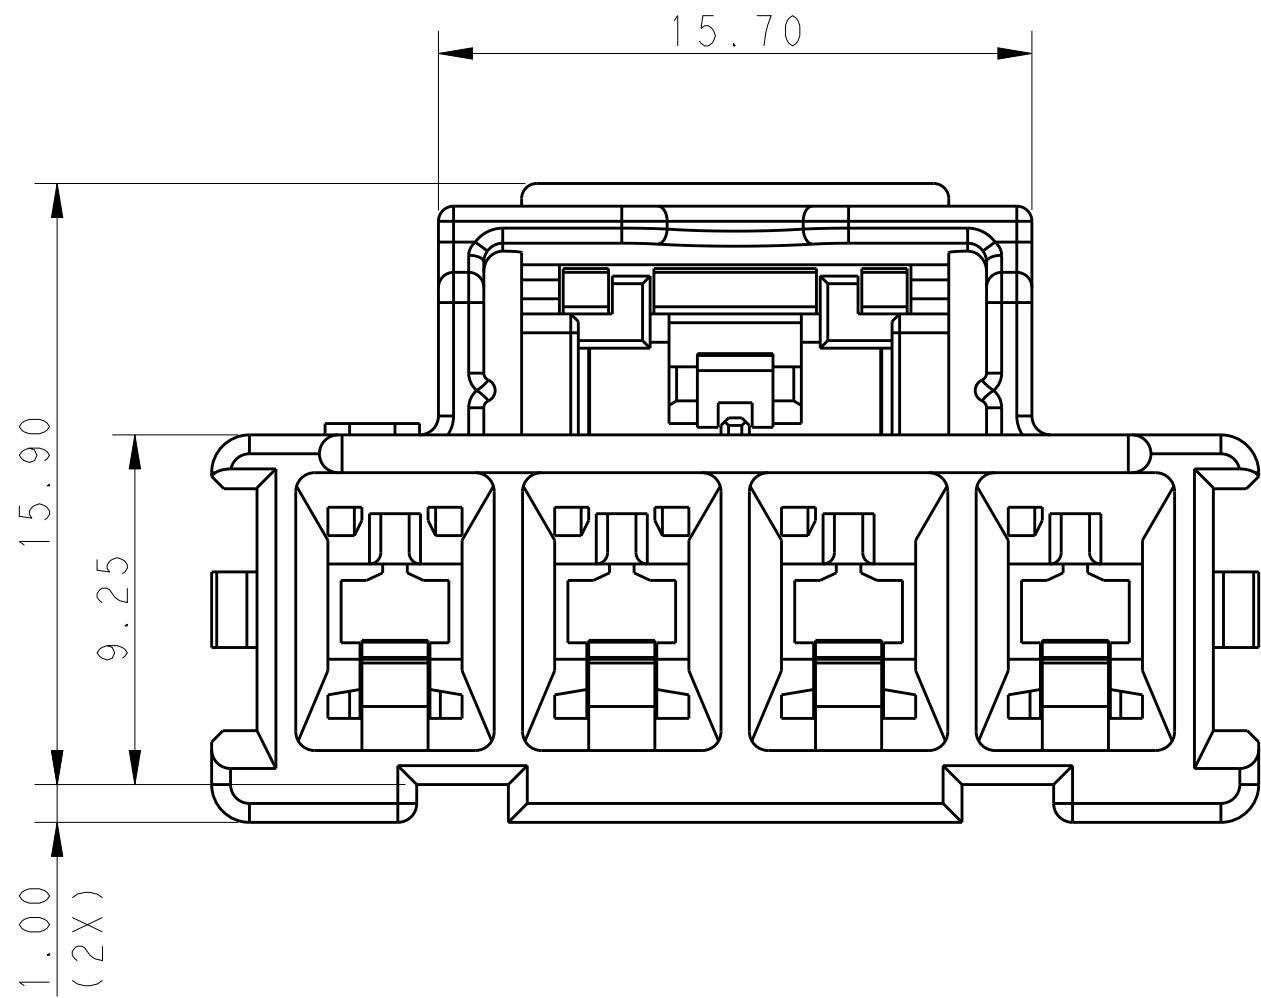


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		D		REVISED PER ECO-16-009784	30 JUN16	RS	GJ

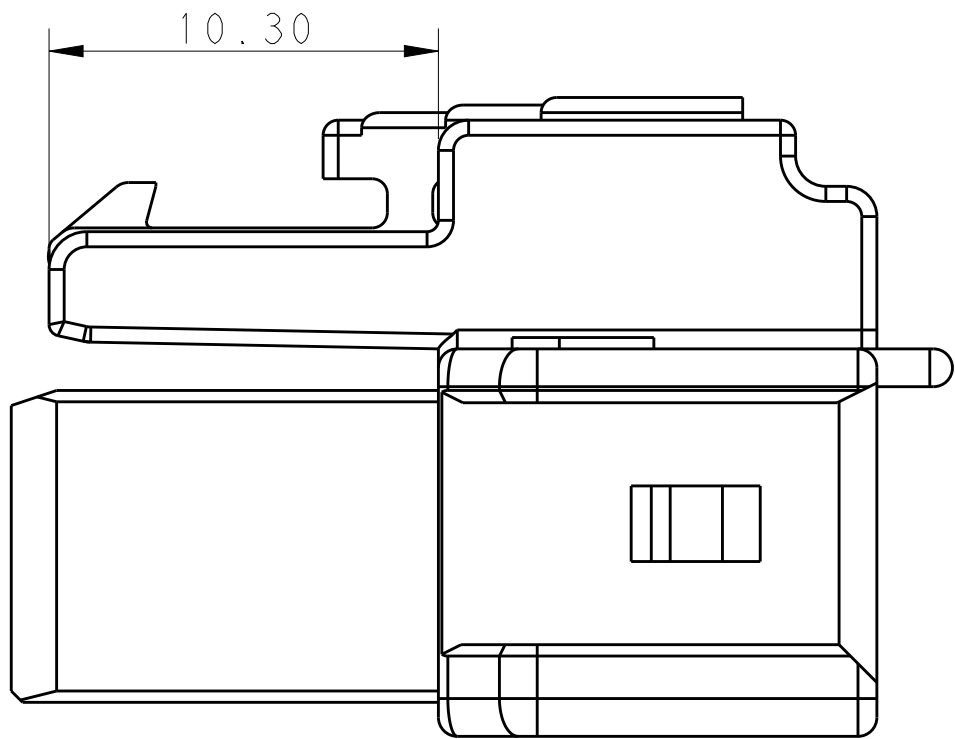

POS.	DIM.A	DIM.B
1*5	33.70	28.00
1*4	27.70	22.00
1*3	21.70	16.00
1*2	15.70	10.00

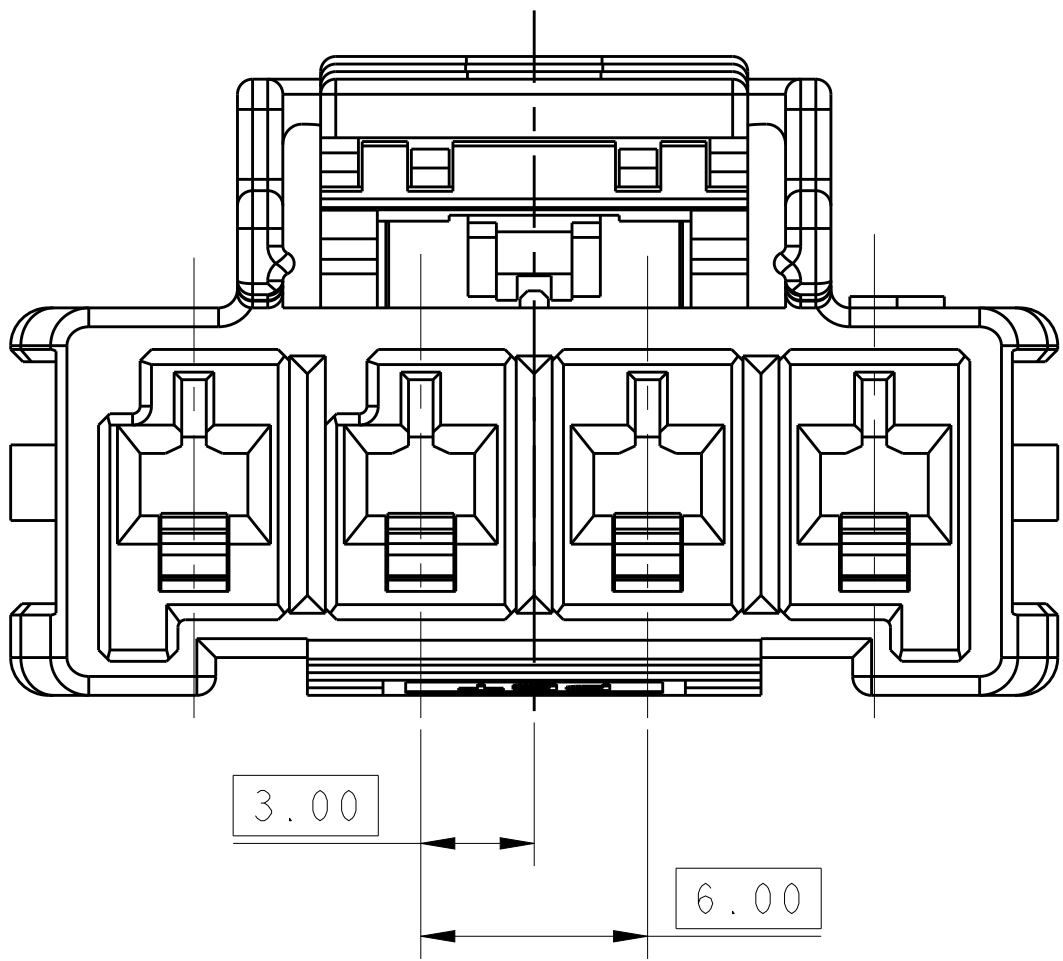

- 1

MATERIAL:
LEVEL 1: PBT,STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW

LEVEL 2: NYLON,HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D:NATURAL
- 2

MATERIAL MARK:
LEVEL 1: PBT,LEVEL 2:HDT
- 3









APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-* , 2238066-*
- 4

MATING CONN, P/N
CAP HSG: *-1971771/2-* AND HEADER: *-1969688-*
TPA (LOCKING PLATE): *-1971777-*

5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU	09JUL2012	TE Connectivity		
		CHK	HAPYE_WU	09JUL2012			
DIMENSIONS:		APVD	YUZHONG_MAO	09JUL2012	NAME		
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	PLUG HOUSING,SINGLE ROW POWER TRIPLE LOCK		
		0 PLC ±-		108-106118	APPLICATION SPEC		
		1 PLC ±0.35		114-106118	SIZE		
		2 PLC ±0.25			CAGE CODE		
		3 PLC ±-			DRAWING NO		
		4 PLC ±-			RESTRICTED TO		
		ANGLES ±-			A100779		
		FINISH -			C=1971773		
MATERIAL		WEIGHT -			Customer Drawing		
					SCALE 5:1		
					SHEET 1 OF 2		
					REV D		

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
					-	SEE SHEET 1		-	-

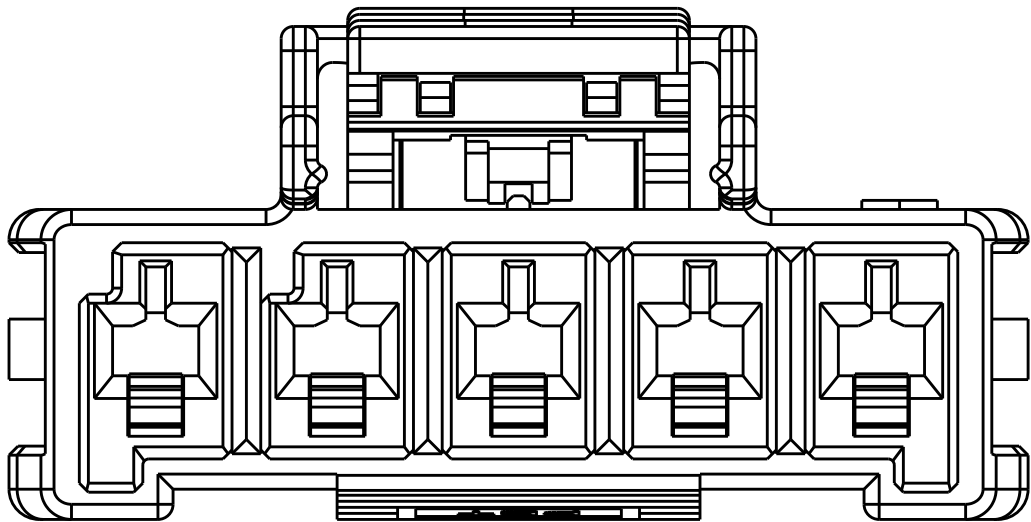
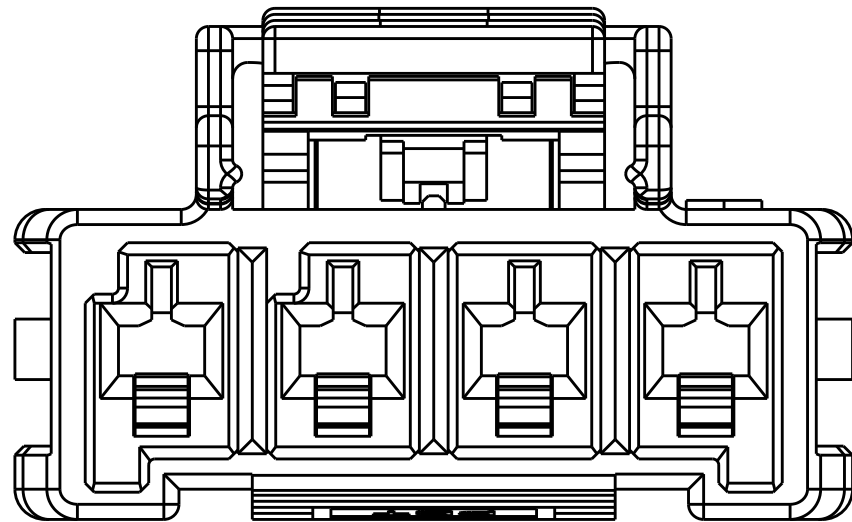
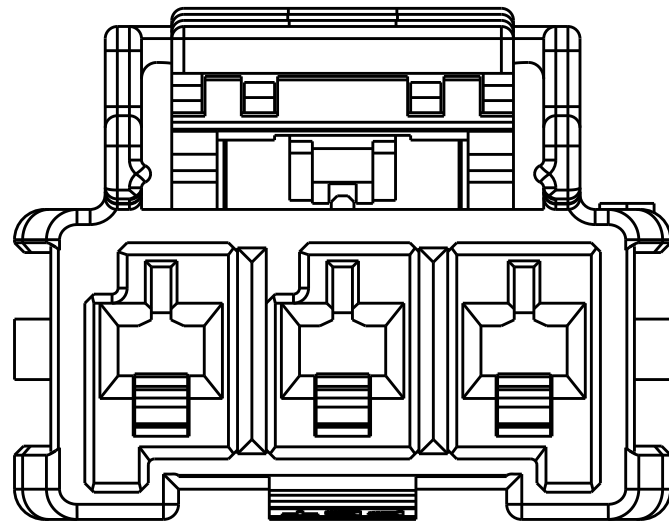
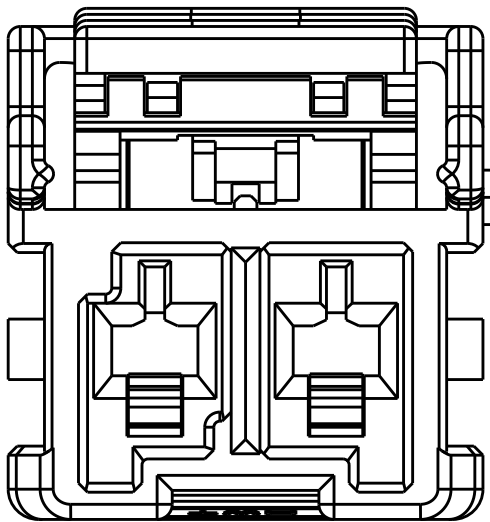
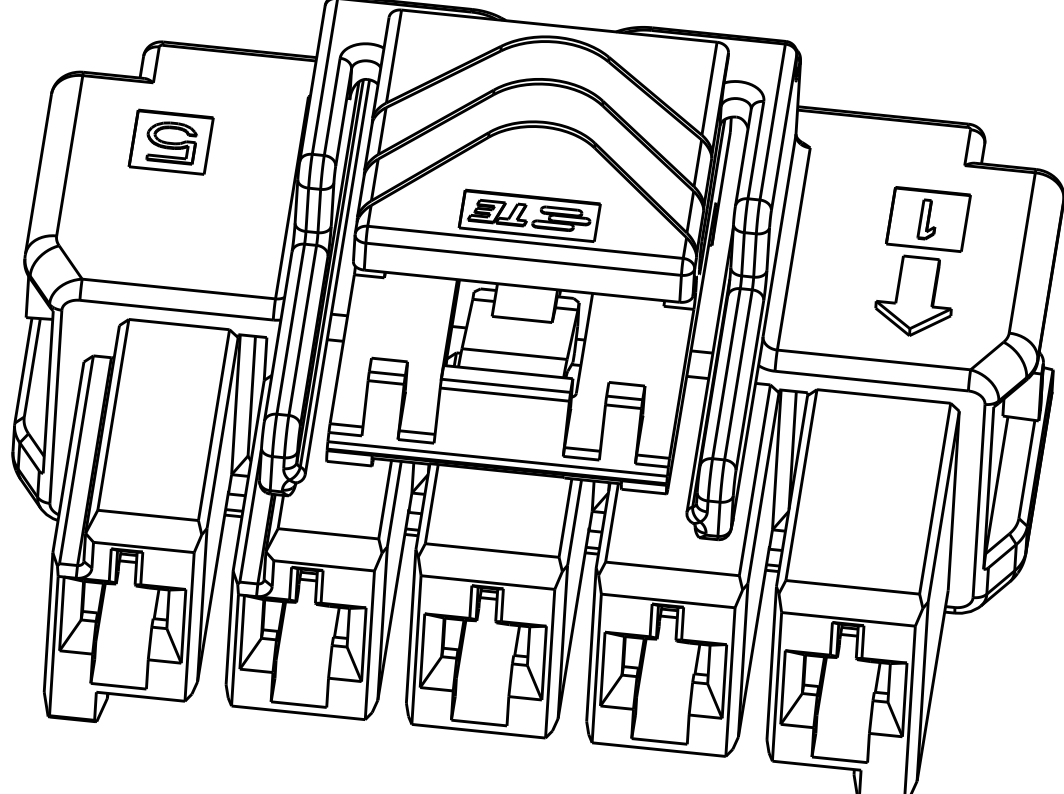
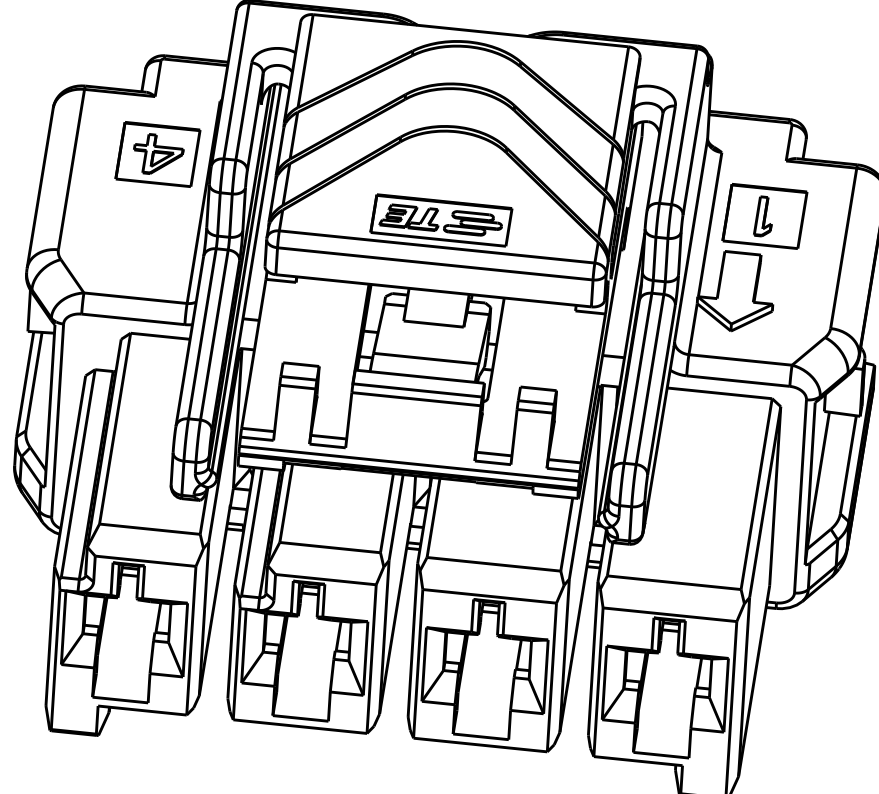
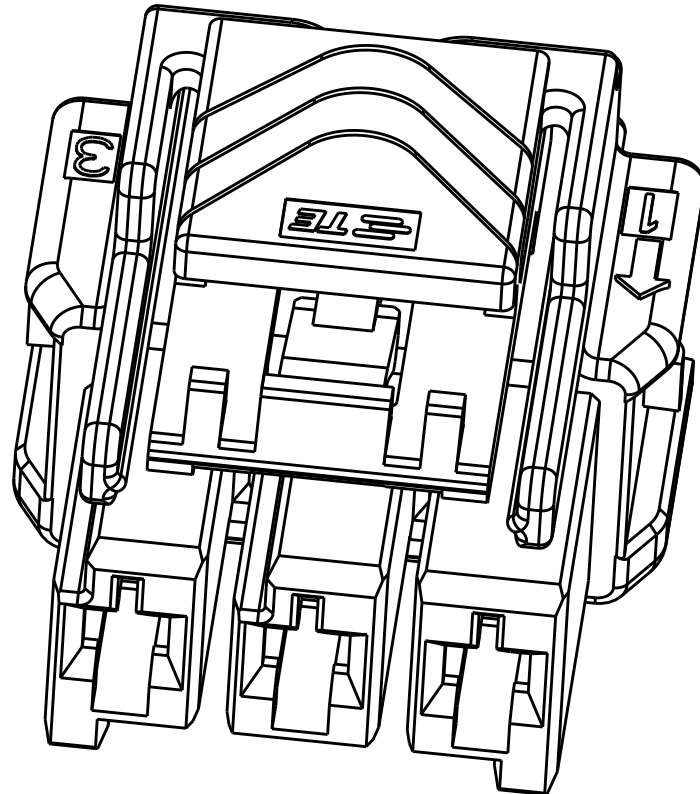
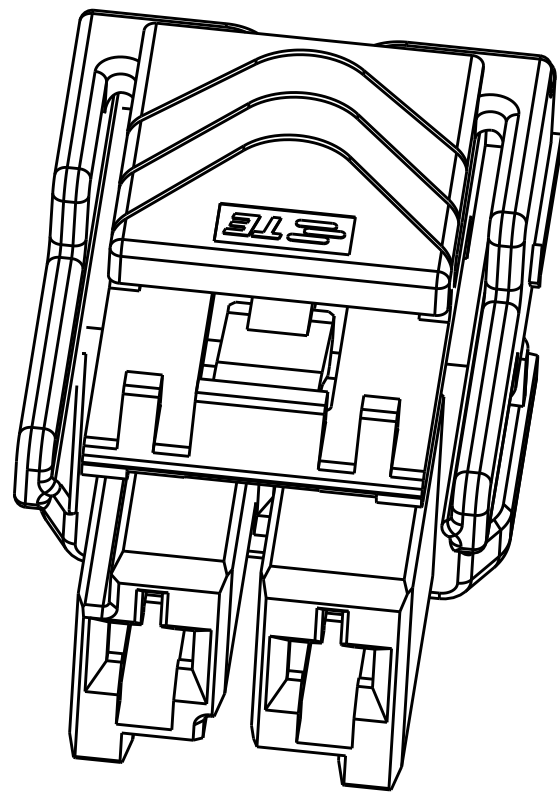


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

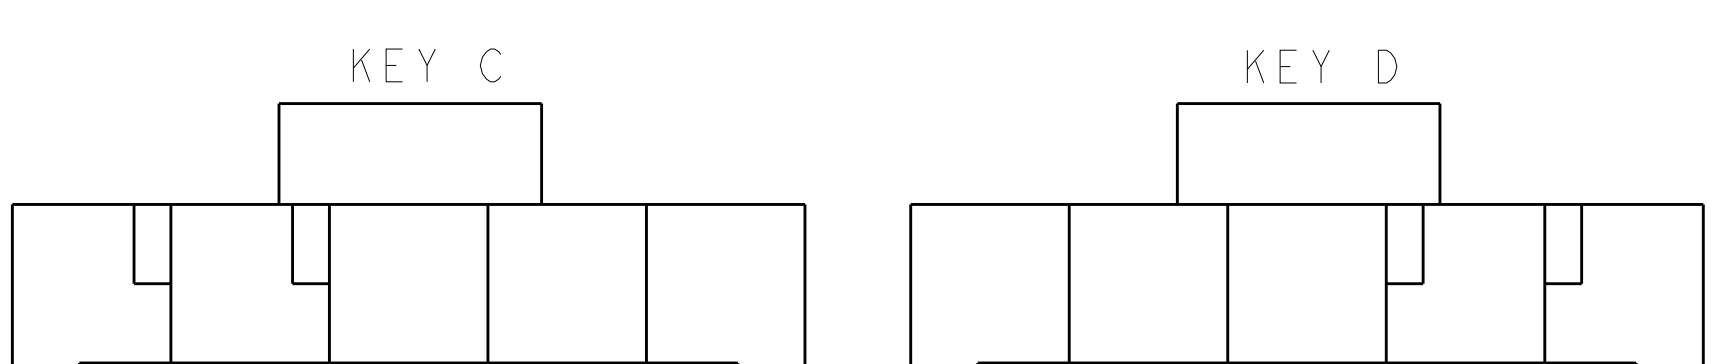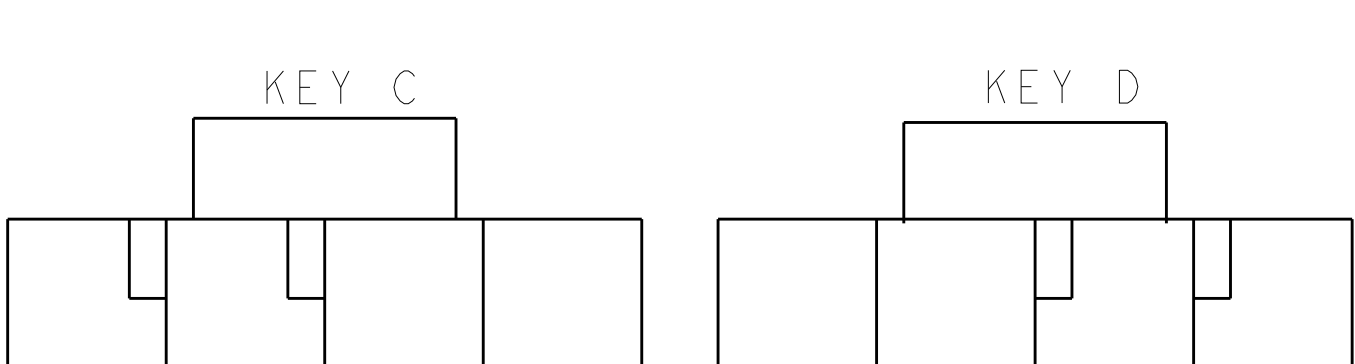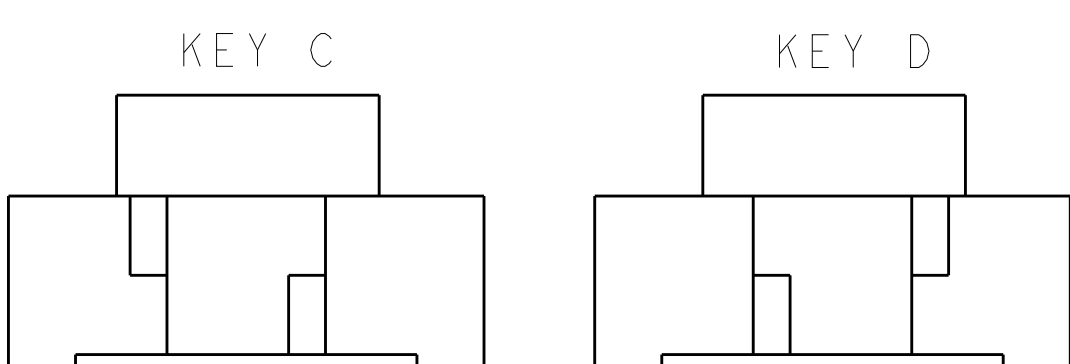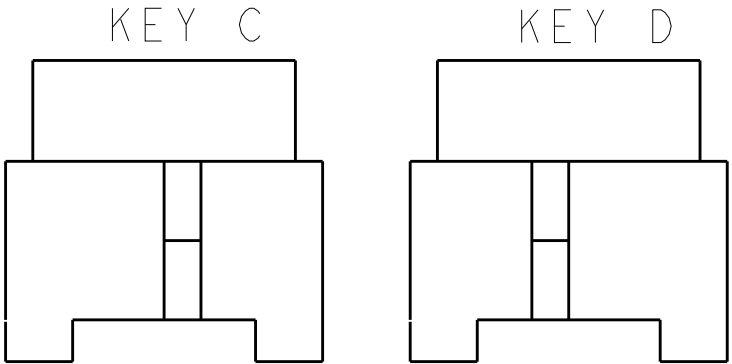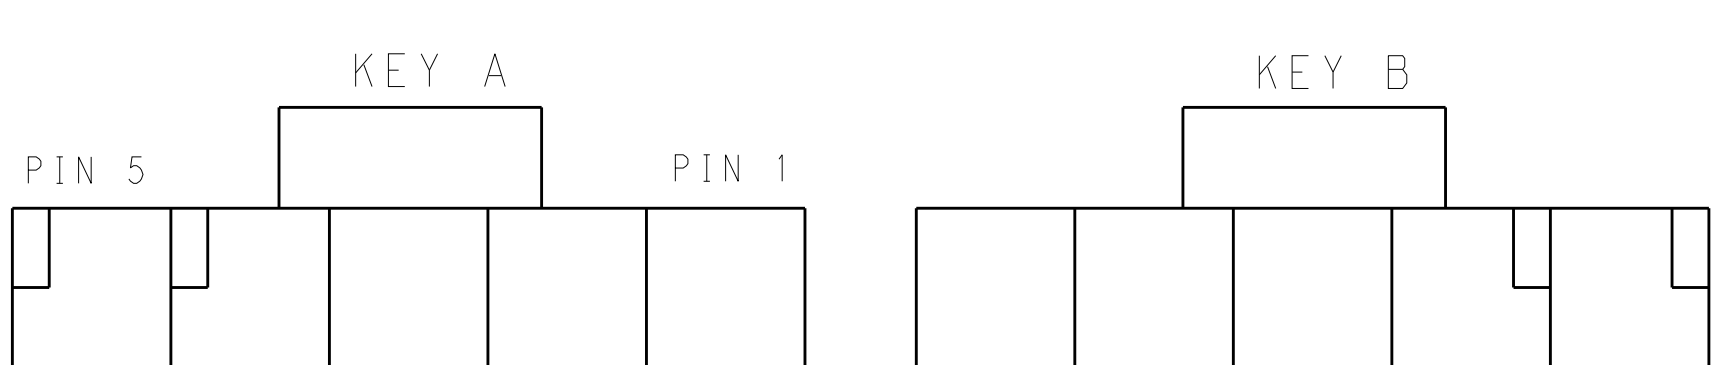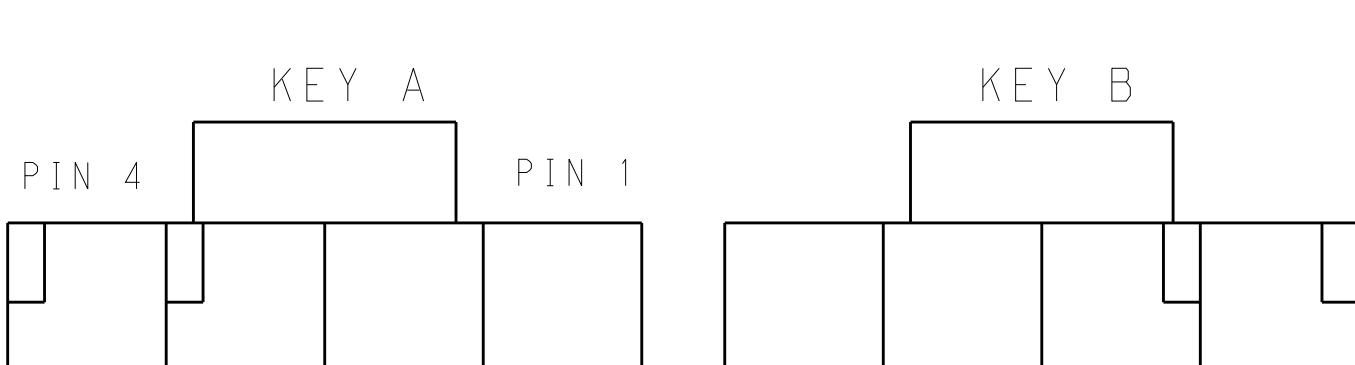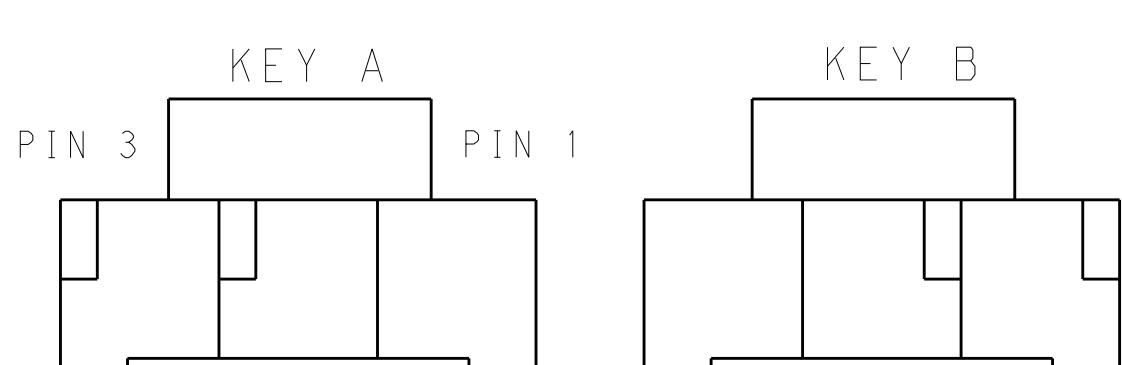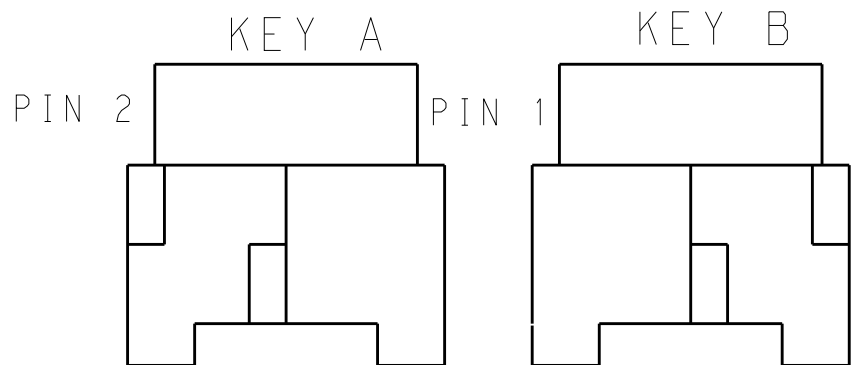

KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*3	LEVEL 1	KEY A	1-1971773-3
		KEY B	2-1971773-3
		KEY C	3-1971773-3
		KEY D	4-1971773-3
	LEVEL 2	KEY A	5-1971773-3
		KEY B	6-1971773-3
		KEY C	7-1971773-3
		KEY D	8-1971773-3
1*2	LEVEL 1	KEY A	1-1971773-2
		KEY B	2-1971773-2
		KEY C	3-1971773-2
		KEY D	4-1971773-2
	LEVEL 2	KEY A	9-1971773-2
		KEY B	6-1971773-2
		KEY C	7-1971773-2
		KEY D	8-1971773-2
POS.	MATERIAL	KEY	P/N

1*5	LEVEL 1	KEY A	1-1971773-7
		KEY B	2-1971773-7
		KEY C	3-1971773-7
		KEY D	4-1971773-7
	LEVEL 2	KEY A	5-1971773-7
		KEY B	6-1971773-7
		KEY C	7-1971773-7
		KEY D	8-1971773-7
1*4	LEVEL 1	KEY A	1-1971773-4
		KEY B	2-1971773-4
		KEY C	3-1971773-4
		KEY D	4-1971773-4
	LEVEL 2	KEY A	5-1971773-4
		KEY B	6-1971773-4
		KEY C	7-1971773-4
		KEY D	8-1971773-4
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: TOMMY WU 09JUL2012
CHK: HAPYE WU 09JUL2012
APVD: YUHONG MAO 09JUL2012

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.1
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±.1
4 PLC ±.1
ANGLES ±.1
FINISH

MATERIAL: -

Customer Drawing

PRODUCT SPEC: 108-106118
APPLICATION SPEC: 114-106118
WEIGHT: -

SIZE: A1
CAGE CODE: 00779
DRAWING NO: 1971773

TE Connectivity

PLUG HOUSING, SINGLE ROW
POWER TRIPLE LOCK

RESTRICTED TO: -

SCALE: 4:1
SHEET: 2 OF 2
REV: D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1971773-3](#)