



8				7							
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION				USAPR2004			
(C) COPYRIGHT 2004				BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT		FEED TYPE					
1385753-1		B	122500-1	LEADMAKER		POST FEED					
1385753-2		B	565435-5	BENCH MODEL K		PRE FEED					
1385753-3		B	354500-1	BENCH MODEL G		PRE FEED					

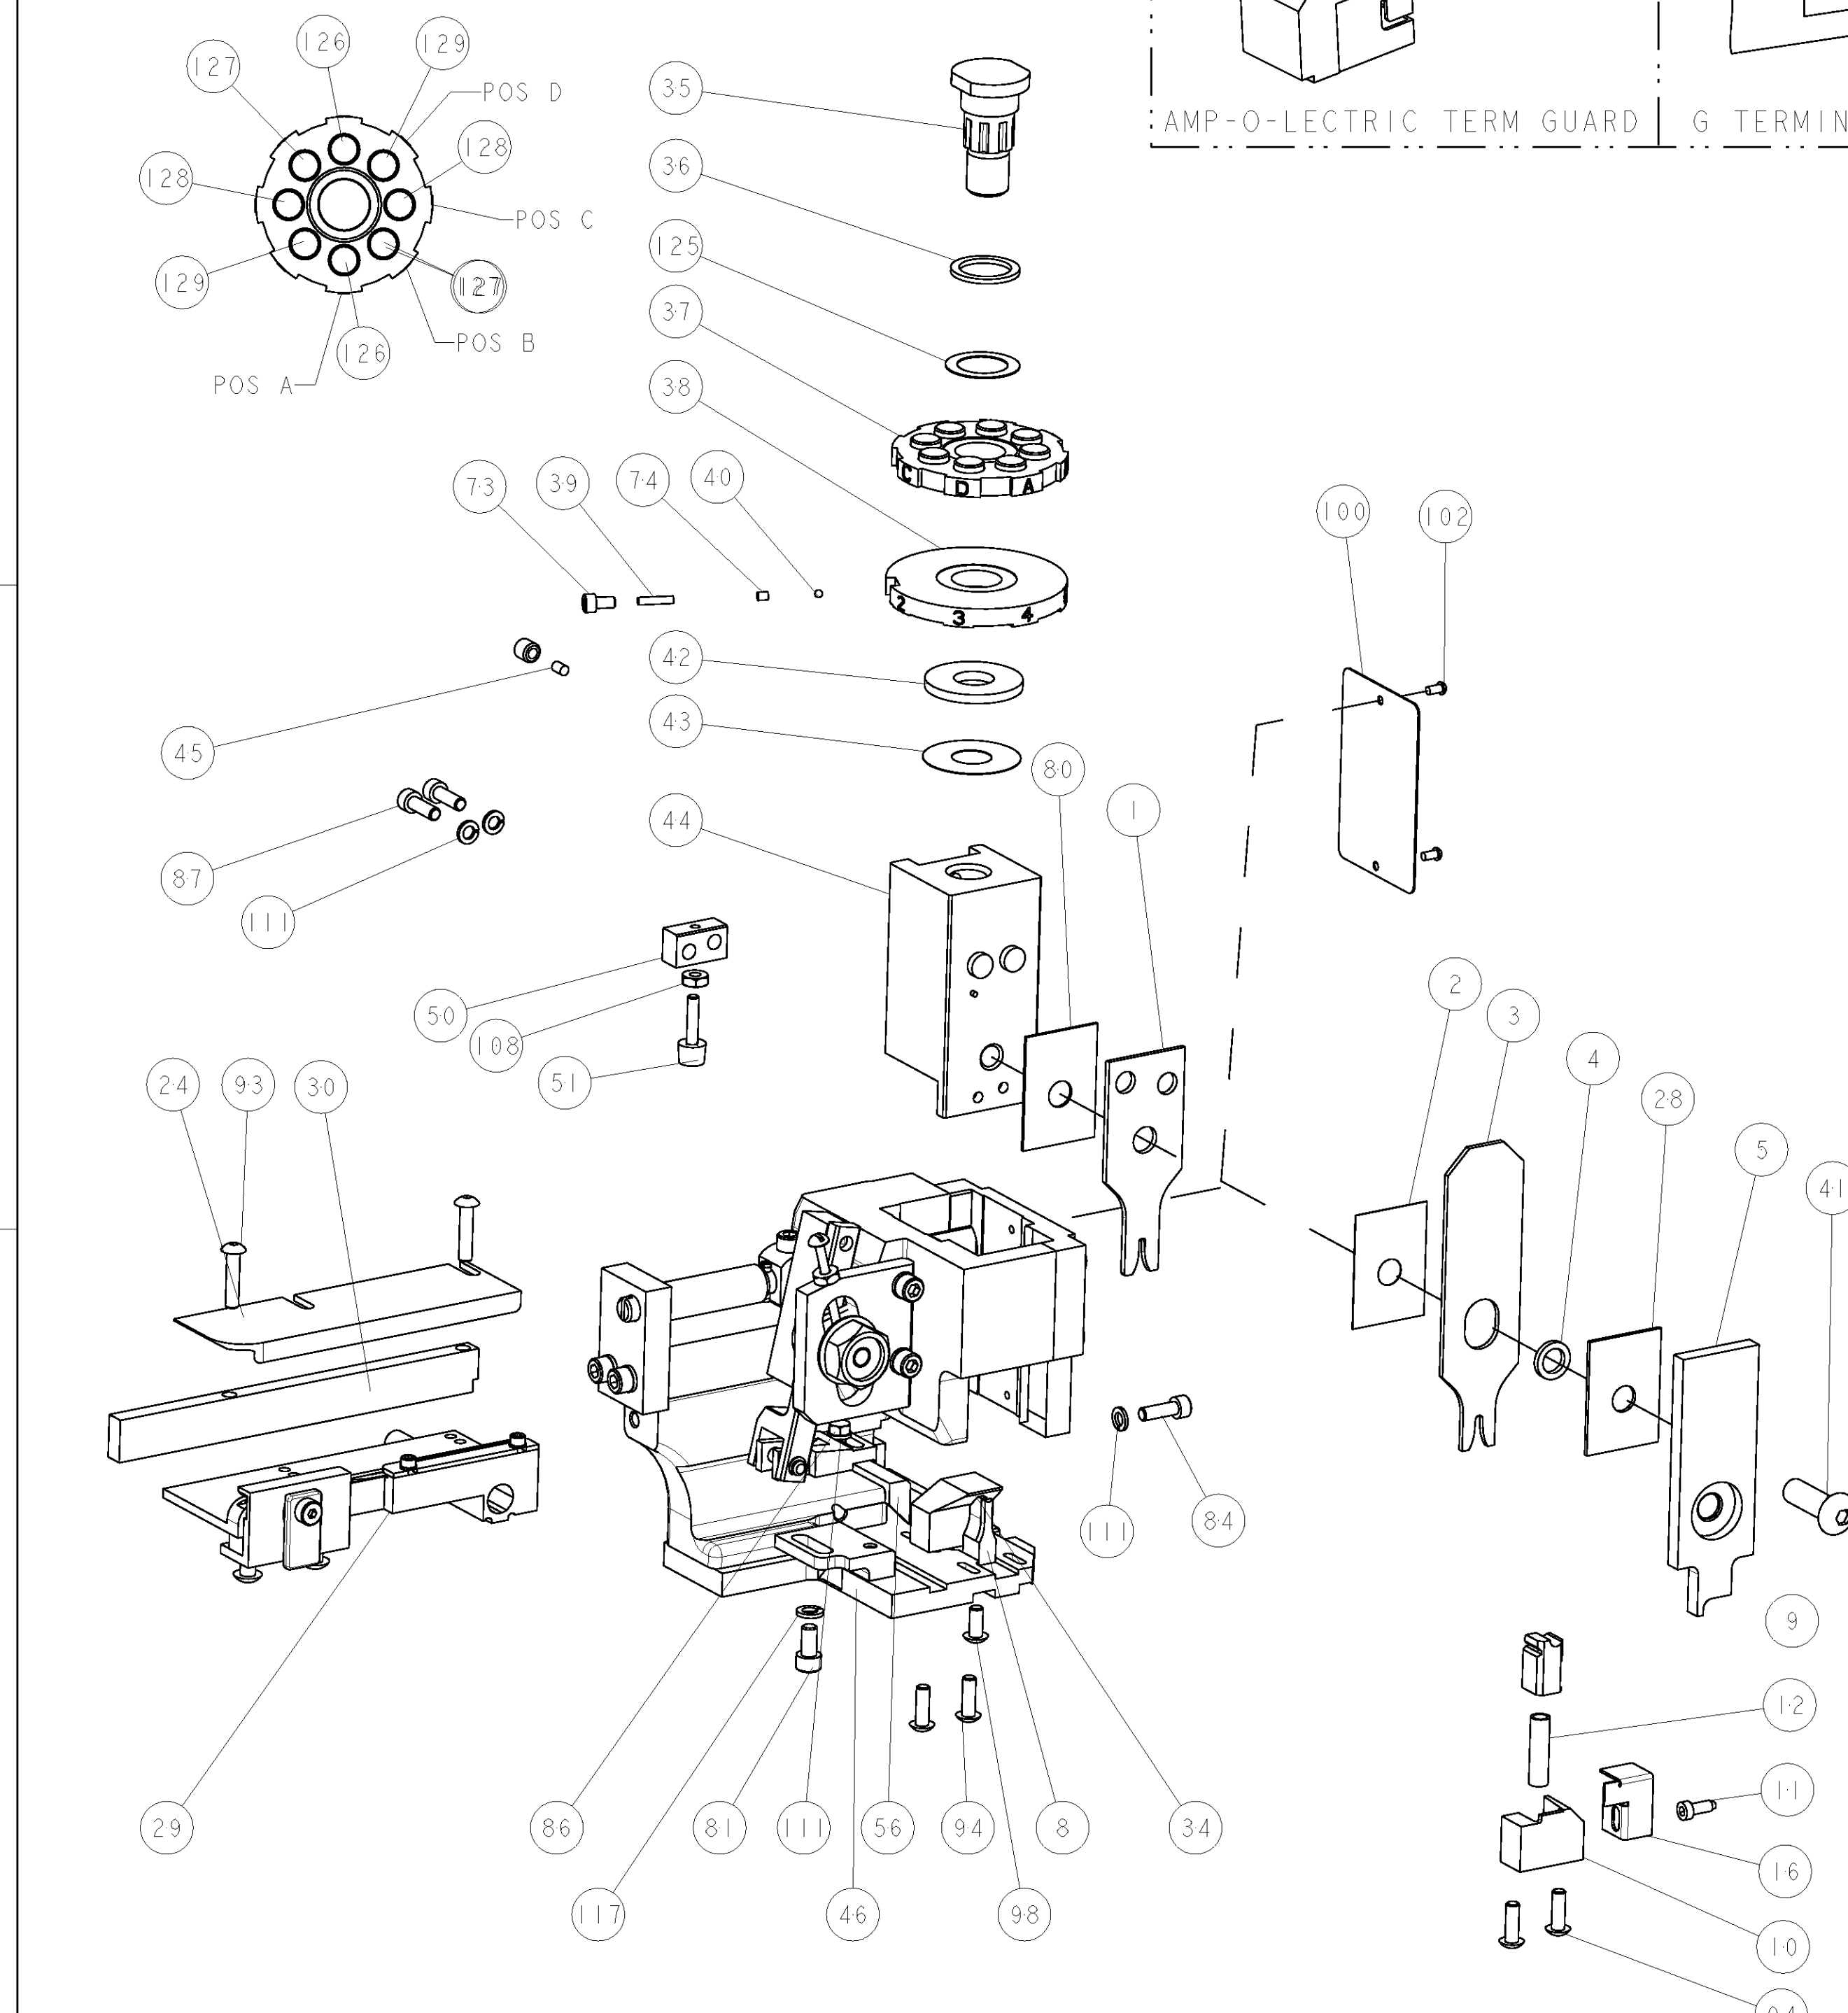

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

2	2	2	-	5-354779-4	PIN, WIRE DISC, .3260	129
2	2	2	-	5-354779-1	PIN, WIRE DISC, .3245	128
2	2	2	-	4-354779-2	PIN, WIRE DISC, .3200	127
2	2	2	-	3-354779-2	PIN, WIRE DISC, .3150	126
1	1	1	-	986950-1	WASHER, FLAT PRECISION	125
1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	124
1	1	1	-	4088040	SF APPL INST 408-8040	123
-	-	-	-	-	-	122
-	-	-	-	-	-	121
-	-	-	-	-	-	120
-	-	-	-	-	-	119
-	-	-	-	-	-	118
1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	117
-	-	-	-	-	-	116
-	-	-	-	-	-	115
-	-	-	-	-	-	114
-	-	-	-	-	-	113
-	-	-	-	-	-	112
4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	111
-	-	-	-	-	-	110
-	-	-	-	-	-	109
1	1	1	-	21018-5	NUT, HEX, REG 6-32	108
-	-	-	-	-	-	107
-	-	-	-	-	-	106
-	-	-	-	-	-	105
-	-	-	-	-	-	104
1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	103
2	2	2	-	21017-2	SCREW, DRIVE	102
-	-	-	-	-	-	101
1	1	1	-	461264-1	PLATE, IDENTIFICATION	100
-	-	-	-	-	-	99
1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	98
-	-	-	-	-	-	97
-	-	-	-	-	-	96
-	-	-	-	-	-	95
4	4	4	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	94
2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	93
-	-	-	-	-	-	92
1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	-	-	-	-	-	90
-	-	-	-	-	-	89
-	-	-	-	-	-	88
2	2	2	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	87
1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	86
-	-	-	-	-	-	85
1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	84
-	-	-	-	-	-	83
-	-	-	-	-	-	82
1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	81
1	1	1	-	455888-7	SPACER, CRIMPER	80
-	REF	-	-	455749-1	GUARD WINDOW	79
-	REF	-	-	679532-1	INSERT, GUARD	78
-	-	-	-	-	-	77
-	-	-	-	-	-	76
-	-	-	-	-	-	75
-	-	-	-	-	-	74
1	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	73
-3	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO

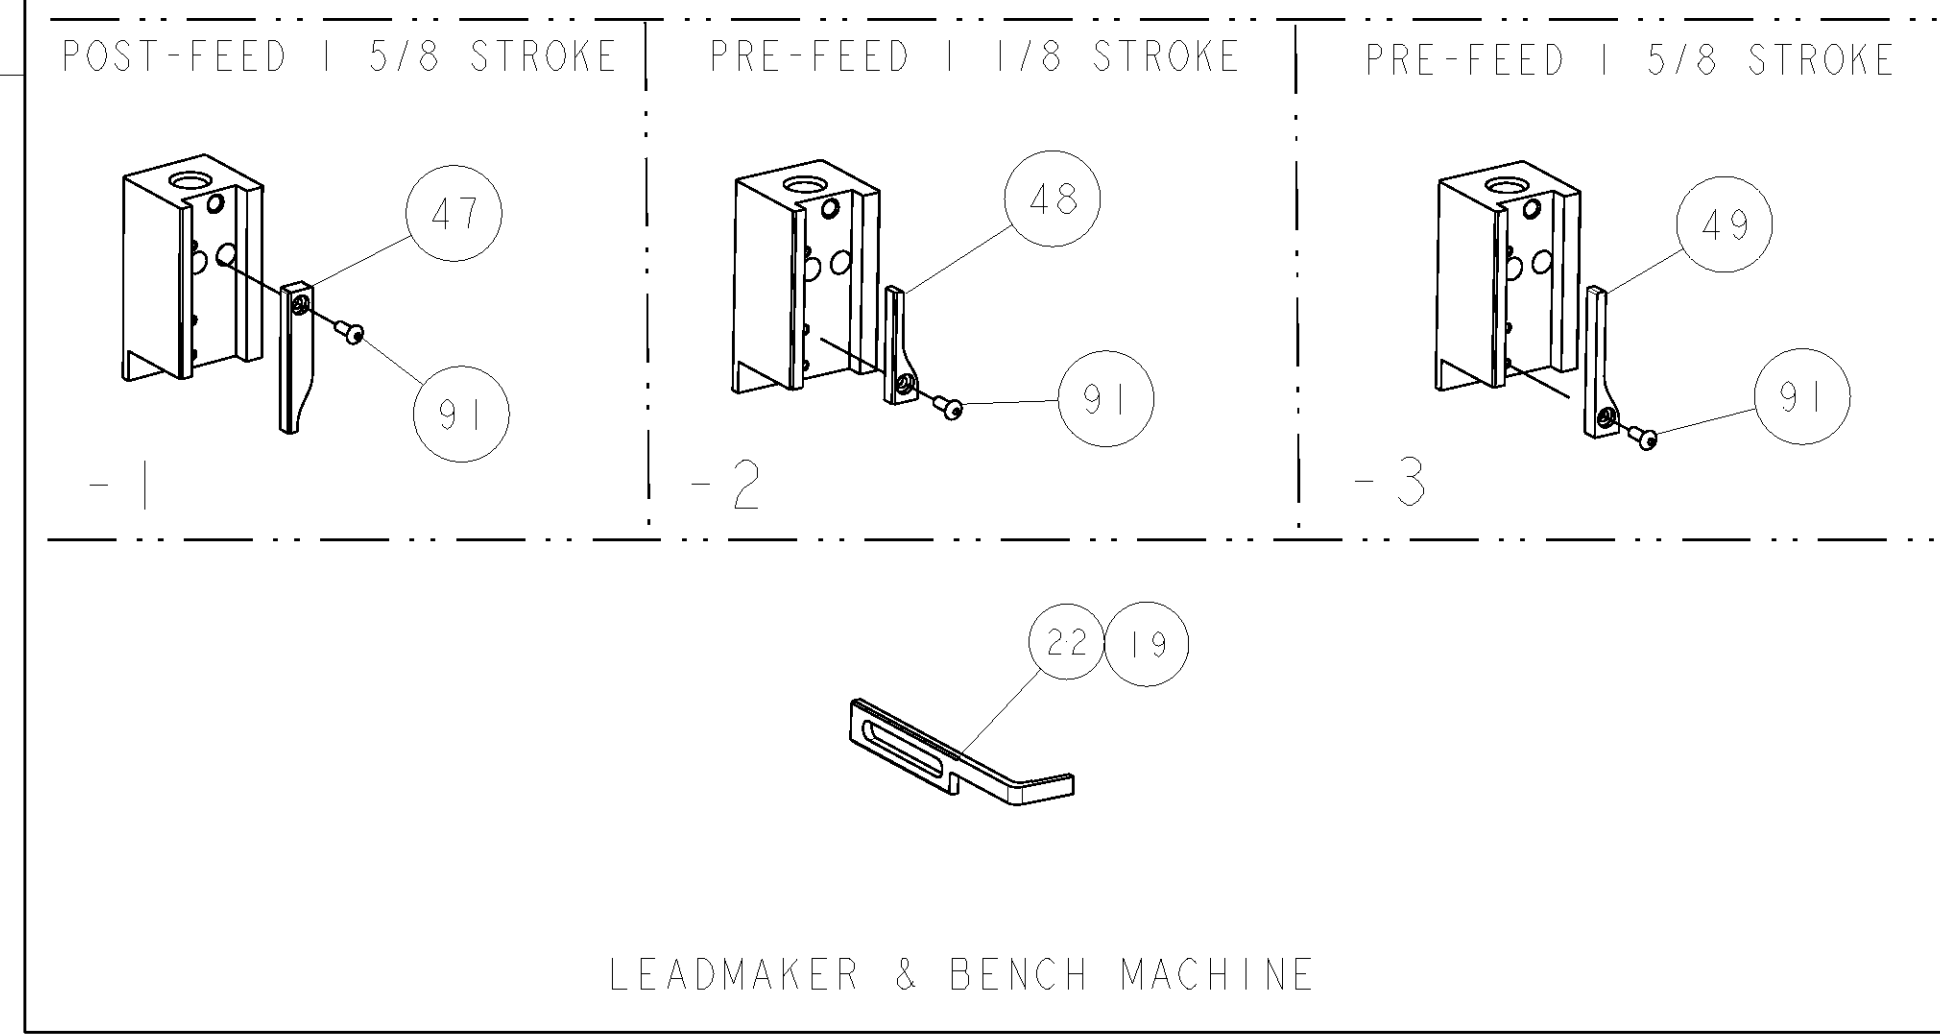

TERMINAL NAME: 3.5mm WIRE-TO-BOARD CRIMP TERMINAL					
AMP P/N NO	MFG P/N NO	MOLEX TERMINAL - MOLEX CRIMP SPECS			
1572430	50217-8000				
1572431	50217-9001	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	.045±.002[1.14±0.05mm]	18	
-	-	B	.040±.002[1.02±0.05mm]	20	
-	-	C	.037±.001[.94±0.025mm]	22	
-	-	D	.035±.001[.89±0.025mm]	24	
SEAL PN.	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	.075 [1.91mm]	F	18 - 20
-	-	INSUL	.110 [2.79mm]	O	.055-.118
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPL INSTRUCTIONS	SET UP GAGE	
.118-.138	NONE	.478	408-8040	458637-1	

LOC		DIST		REVISIONS									
A	66	P	LTR	DESCRIPTION						DATE	DWN	APVD	
		A		RELEASED						08APR2004	RK	GB	
		B		ECR-10-016956						17AUG2010	MY	TE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1385753-3](#)