


# wakefield-vette


Standard P/N	Nominal Dimensions			Semiconductor Mounting Hole Pattern	Thermal Performance at Typical Load		Weight lbs. (grams)
	Width in. (mm)	Length "A" in. (mm)	Height in. (mm)		Natural Convection	Forced Convection	
431K	4.750 (120.7)	3.000 (76.2)	3.000 (76.2)	None	55°C @ 50W	0.40°C/W @ 250 LFM	0.7800 (353.81)
433K	4.750 (120.7)	5.500 (139.7)	3.000 (76.2)	None	42°C @ 50W	0.28°C/W @ 250 LFM	1.4900 (675.86)

## MECHANICAL DIMENSIONS 431 AND 433 SERIES (EXTRUSION PROFILE 2726)

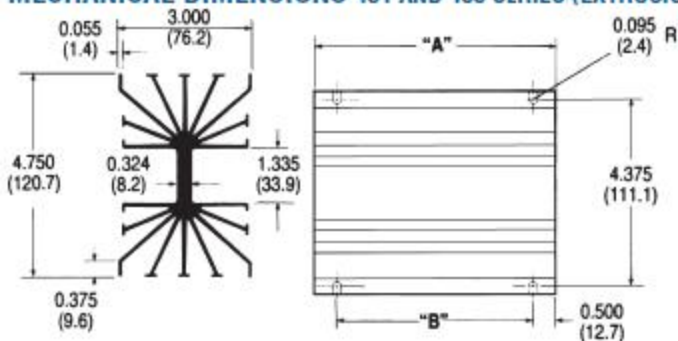

SERIES	"A"	"B"
431	3.000 (76.2)	2.000 (50.8)
433	5.500 (139.7)	4.500 (114.3)

## NATURAL AND FORCED CONVECTION CHARACTERISTICS

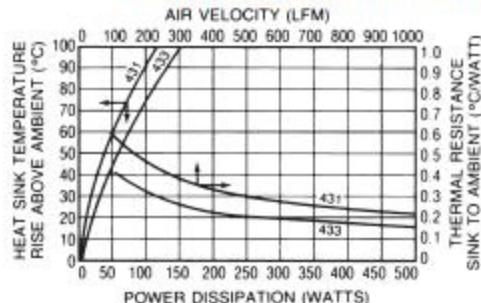

## SEMICONDUCTOR MOUNTING HOLE

K  
BLANK  
NO HOLES

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wakefield-Vette:](#)

[433K](#) [431K](#)