

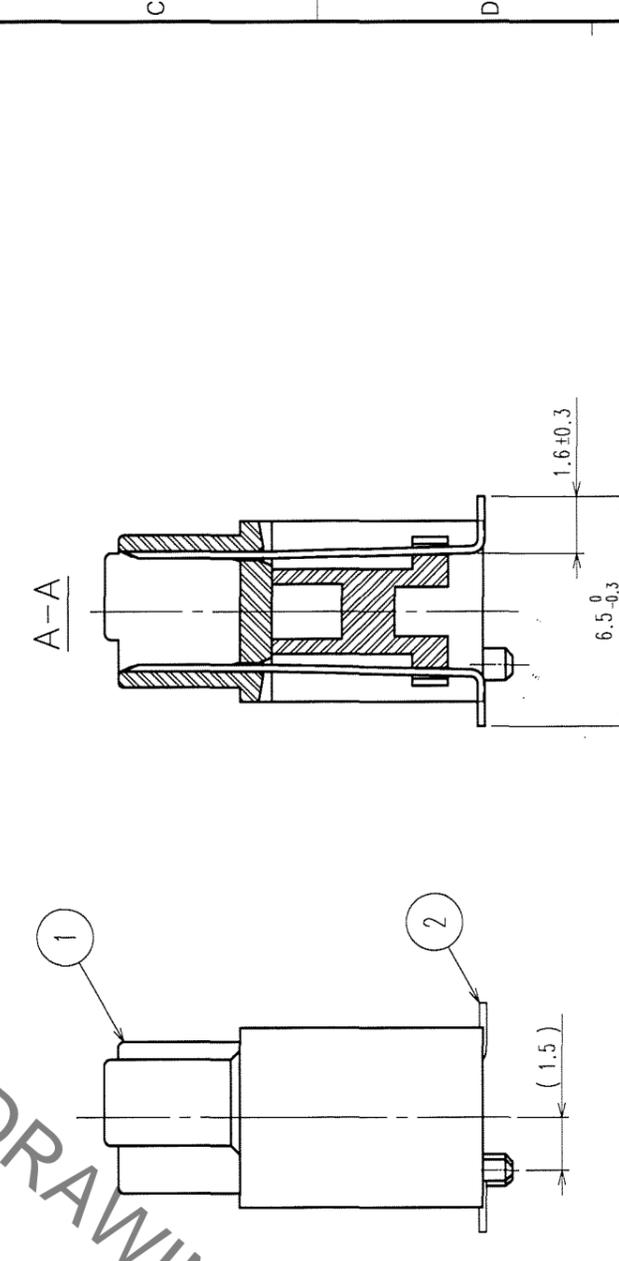
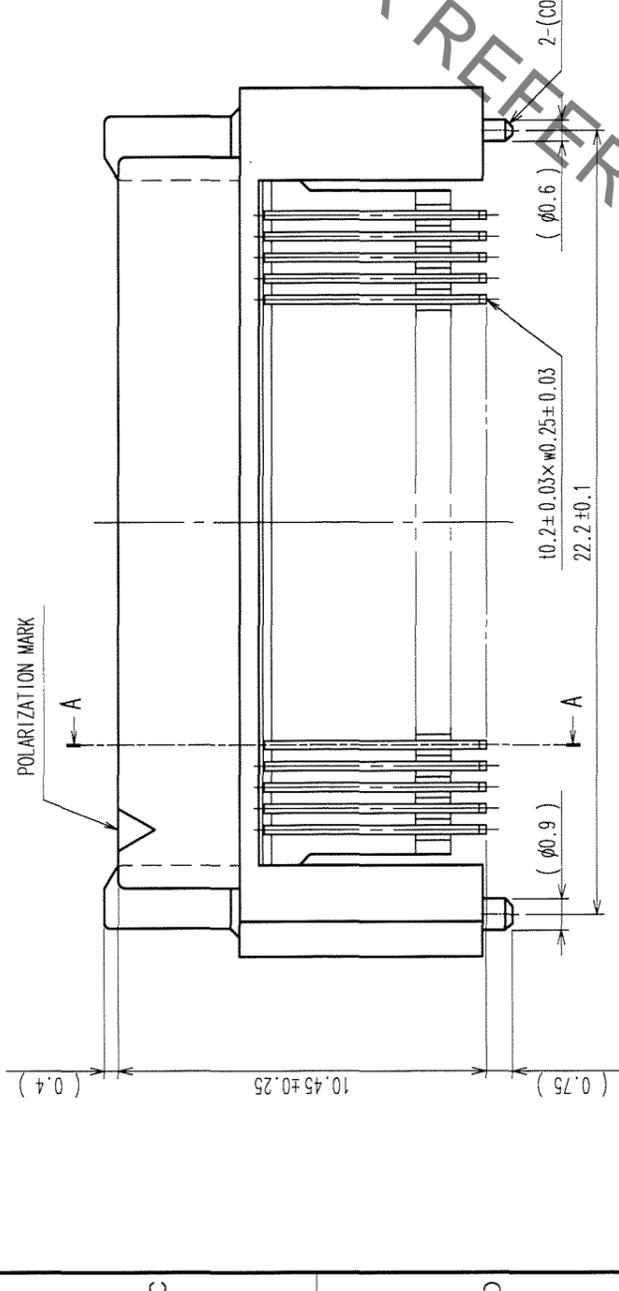
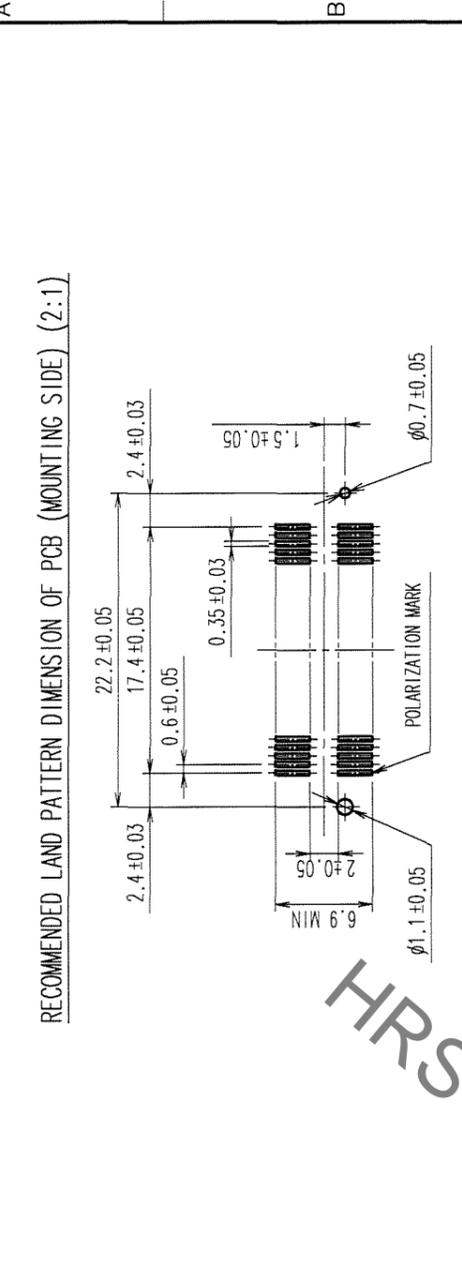


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△									
△									
△									

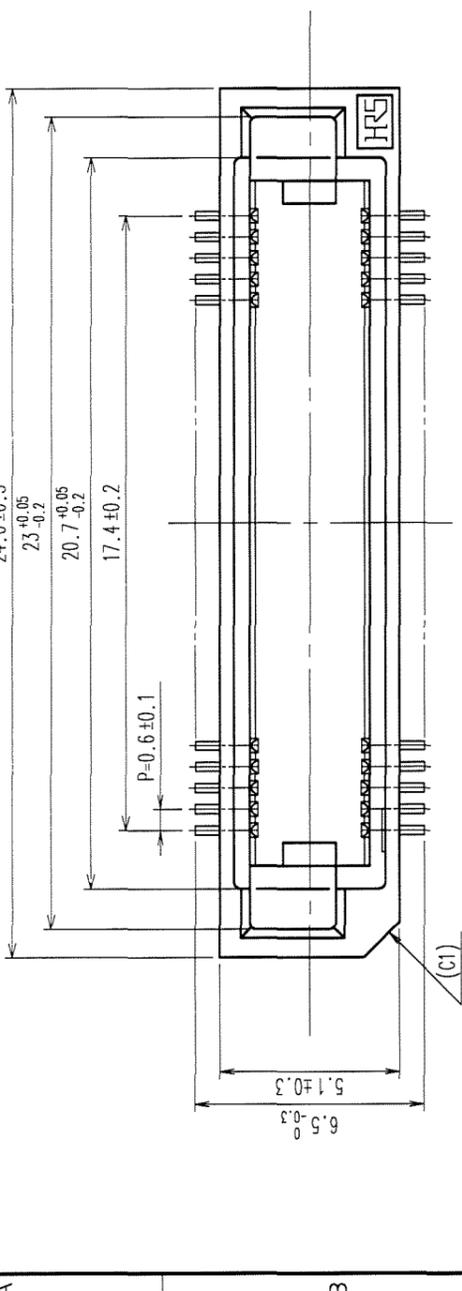

NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.  
 2. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.  
 3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

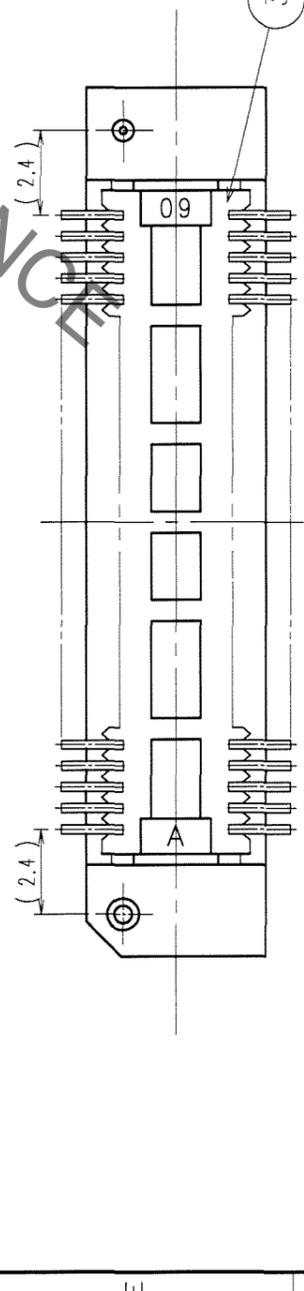

1-3	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (COLD)	CL				
DRAWING NO. EDC3-150871-25		PART NO. FX8C-60P-SV6(71)		APPROVED H. Okawa	
SCALE 5:1		DRAWN K. NAKAMURA		DESIGNED K. NAKAMURA	
UNITS mm		05.11.18		05.11.21	
HRS HIROSE ELECTRIC CO., LTD.		CODE NO. CL578-0601-3-71		RELEASED	

TO	
PCK	