
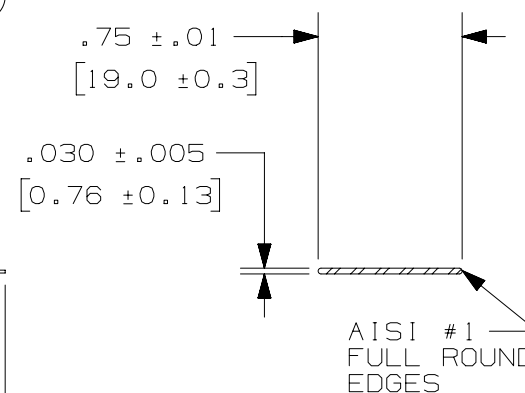


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PACKAGE QUANTITY	MAX BUNDLE DIA [mm]	LENGTH "L" +/- .2 [5]	MARKING "XXX SS"
MS4W75T30-Q6	25	4" [102]	20.2" [513]	316 SS
MS6W75T30-Q6	25	6" [152]	26.5" [673]	316 SS
MS8W75T30-Q6	25	8" [203]	32.7" [831]	316 SS
MS10W75T30-Q6	25	10" [254]	39.0" [991]	316 SS
MS12W75T30-Q6	25	12" [305]	44.7" [1135]	316 SS
MS14W75T30-Q6	25	14" [356]	50.1" [1273]	316 SS

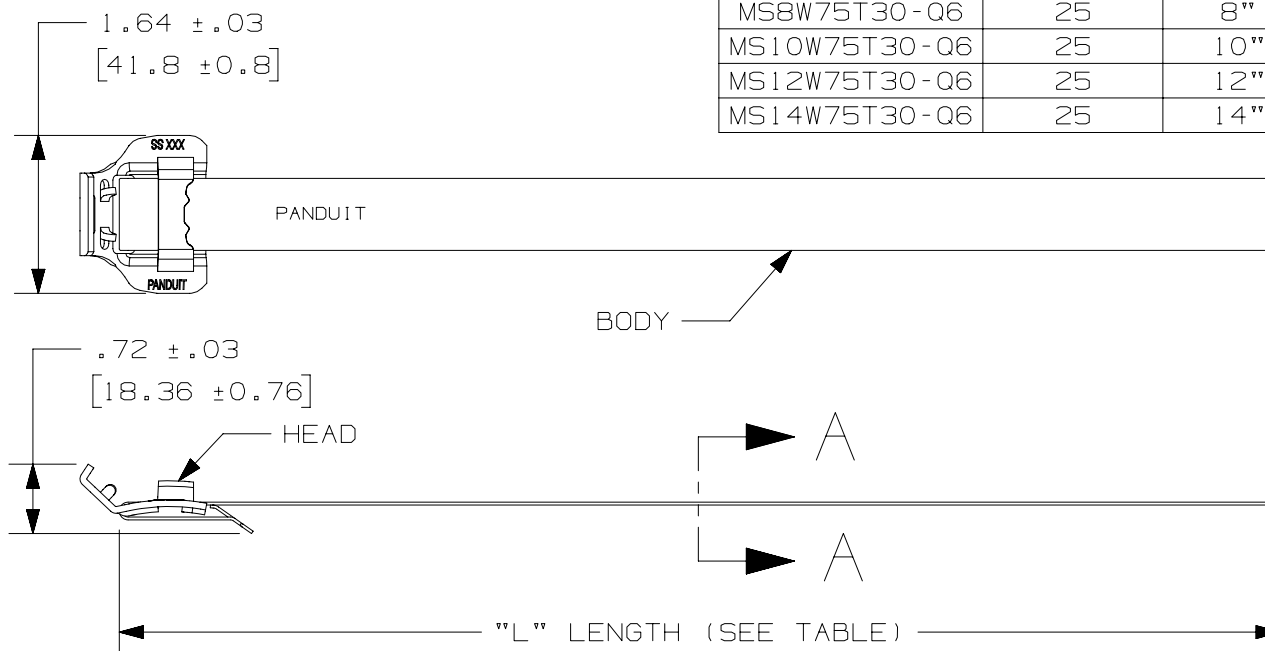

SECTION A - A

NOTES:

1. APPLICATION TOOLS: BT75SDT
2. ALL DIMENSIONS IN BRACKETS [] ARE MILLIMETERS
3. MATERIAL: 316 STAINLESS STEEL
4. MAX BUNDLE SIZE FOR SINGLE LOOP APPLICATIONS
BUNDLE SIZE IS HALVED FOR DOUBLE LOOP APPLICATIONS.

							TITLE DISCRETE LENGTH TIE .750" [19.05] WIDE					
							CUSTOMER DRAWING					
							ITEM REVISION NAME N41311BS/02			PANDUIT		
							DATASET FILE NAME N41311BS_DC/02A					
02	01/23/17	JBN	SKB	RGR0	ADDED MS14W75T30-Q6 TO THE CHART	N41311BS-DC	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± N/A					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MS8W75T30-Q6](#) [MS6W75T30-Q6](#) [MS12W75T30-Q6](#) [MS4W75T30-Q6](#) [MS10W75T30-Q6](#)