


PLUG MML H2.0 - BULKHEAD JACK SMA
R302.205.003
CABLE 1.13/50 S-BR, LENGTH 10CM

Series : MML

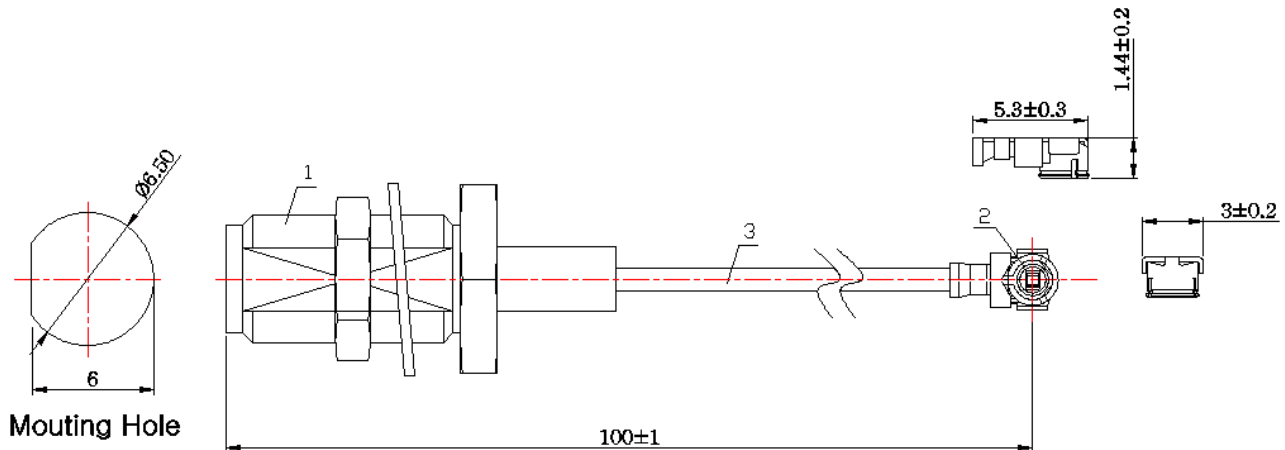

- * 1 * Connector A : **SMA JACK(GOLD PLATED) BULKHEAD**
 * 2 * Connector B : **MML*PLUG(GOLD PLATED) H2.0**
 * 3 * Cable : **1.13/50 S BLACK**

ELECTRICAL CHARACTERISTICS

Impedance	50 Ω
Frequency	0-3 GHz
Operating temperature	-40/+90 ° C
VSWR	1.5 + 0,000 x F(GHz) Maxi
Insertion loss	0.12 $\sqrt{F}$ (GHz) dB Maxi
Voltage rating	200 Veff Maxi
Dielectric withstanding voltage	200 Veff mini
Insulation resistance	500 M Ω mini

SPECIFICATION

Weight	3,6000 g
Cable retention	12.74 N mini
Mating life	30 cycles
Others :	

RADIAL 

Edition : 1036 A

Design changes may be in order to improve the product.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R302205003 100](#) [R302205003 250](#) [R302205003 150](#) [R302205003 200](#) [R302205003 300](#)