


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				E	REV / 0L20-0197-97	21AUG97	ME SB

AMP WIRE RANGE	 Listed	 LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

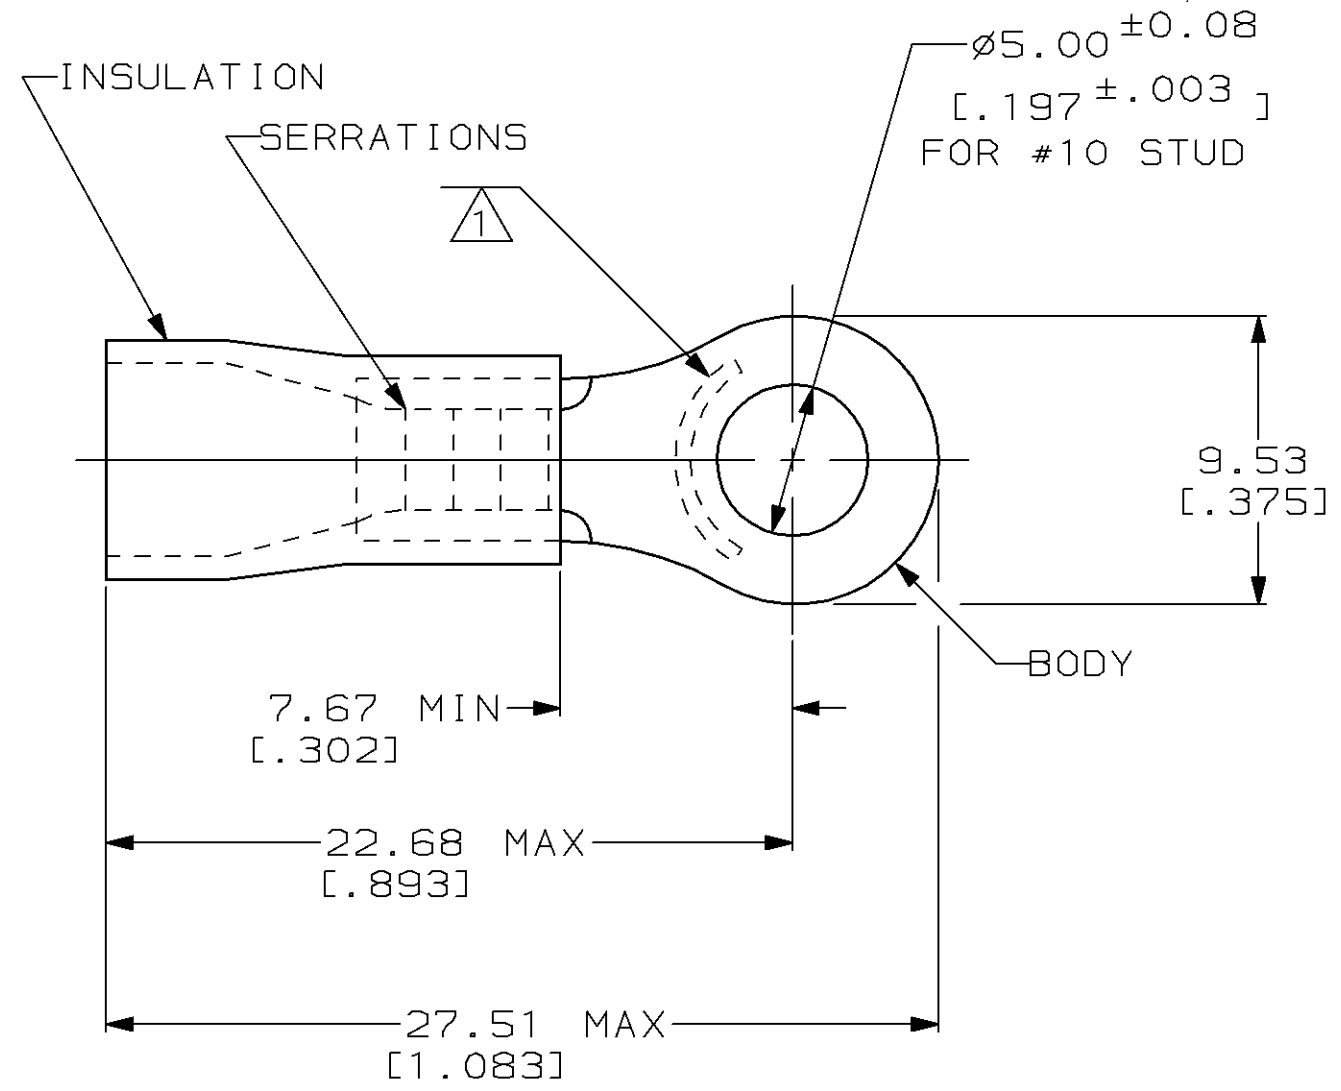

- 1 STAMP AMP 12-10* APPROX AS SHOWN
- 2 WIRE INSULATION DIA, .150-.250
- 3 TONGUE MATERIAL THK, 0.99±0.05 [.039±.002]

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 90°C MAX		5000	ON TAPE, REEL	2-328261-1
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS			VOLTAGE RATING: NOT APPLICABLE		QUANTITY		
FOR APPLICATION TOOLING INFORMATION			CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100]		PACKAGE TYPE		
FOR ORDER ENTRY			THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		PART NO		
PRODUCT INFORMATION CENTER 1-800-522-6752			DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20 [.008] 3 PLC DEC ± - ANGLES ± -		AMP AMP Incorporated Harrisburg, PA 17105-3608		
CUSTOMER SERVICE HOTLINE 1-800-722-1111			MATERIAL COPPER ASTM B-152 PVC, COLOR, BLACK		NAME TERMINAL, RING TONGUE, PLASTI-GRIP™		
			FINISH TIN PLATE PER ASTM B 545		SIZE B		
					CAGE CODE 00779		
					DRAWING NO C-328261		
					SCALE 4:1		
					SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-328261-1](#)