




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			760	MHz
Upper Frequency:	860			MHz
Tuning Voltage:	0.3		4.7	VDC
Supply Voltage:	2.66	2.8	2.94	VDC
Output Power:	-5.0	-4.0	-3.0	dBm
Supply Current:		15	22	mA
Harmonic Suppression (2 nd Harmonic):		-15	-10	dBc
Pushing:		0.7	1.5	MHz/V
Pulling, all Phases:		0.5	1.0	MHz pk-pk
Tuning Sensitivity:		40		MHz/V
Phase Noise @ 10kHz offset:		-105	-103	dBc/Hz
Phase Noise @ 100kHz offset:		-124	-122	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			47	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C

Phase Noise (1 Hz BW, Typical)

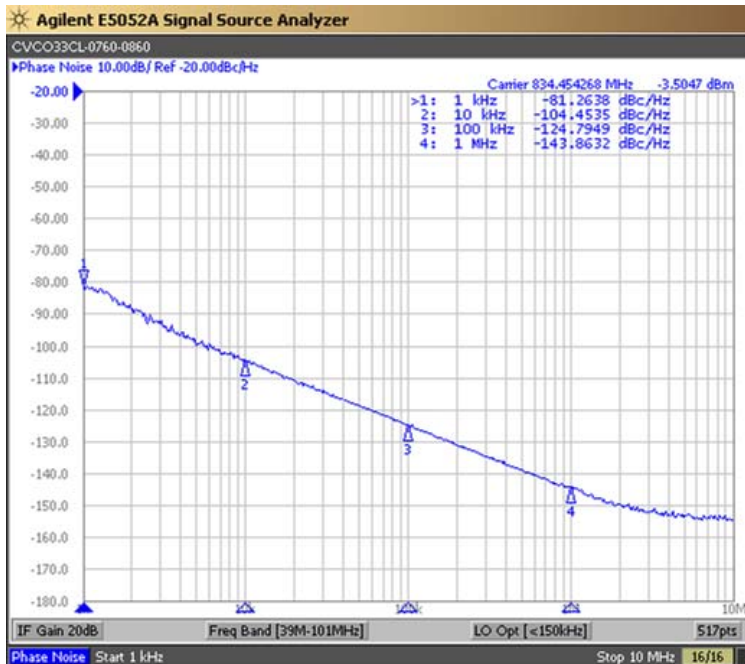

Tuning Curve (Typical)

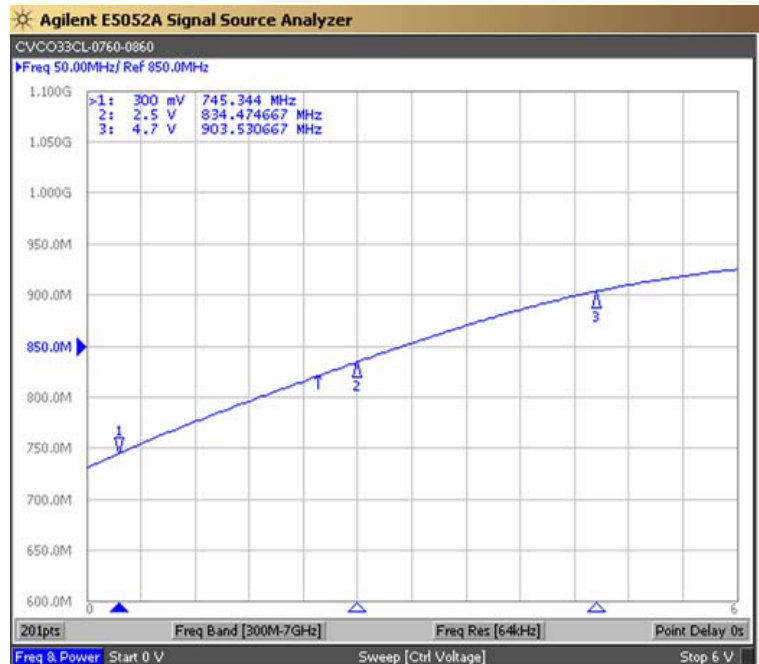


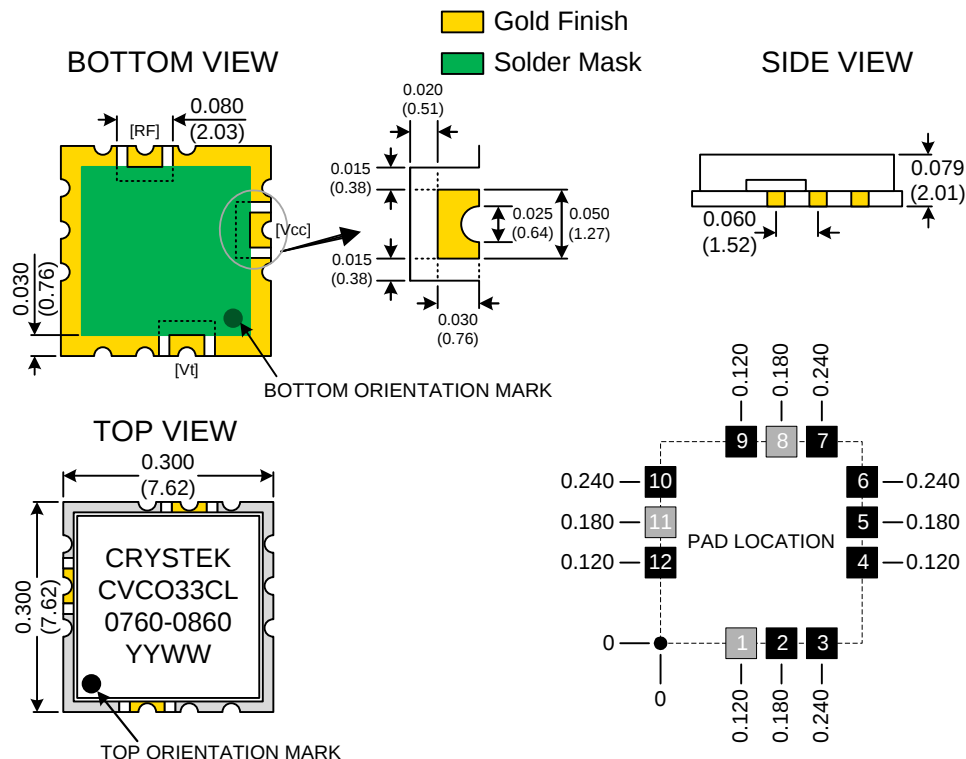

Pad	Connection
1	Vt
8	RF-OUTPUT
11	Vcc
Others	GROUND

- Unless otherwise specified,
Dimensions are in: $\frac{\text{IN}}{(\text{mm})}$
- Pad Location
Dimensions are in: Inches

TAPE AND REEL

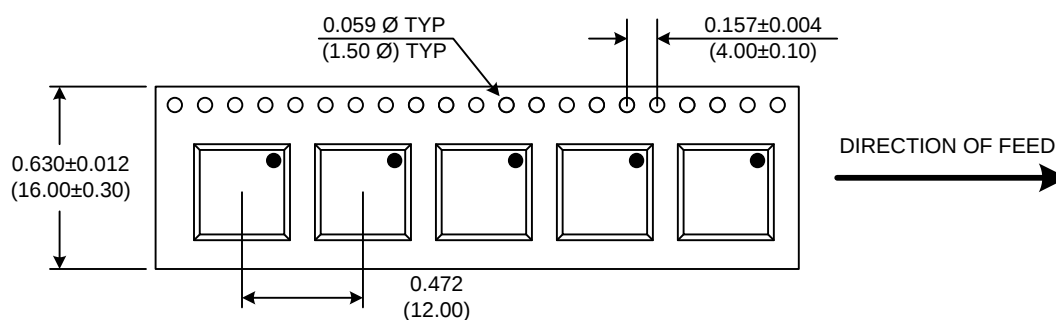

Drawing not to scale

Product Control:

Crystek Part Number:	CVCO33CL-0760-0860	Release Date:	13-Dec-2012
Revision Level:	E	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CVCO33CL-0760-0860](#)