

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP 1999.

© COPYRIGHT 1999 BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.






LOC

DIST

REVISIONS

変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED FJB0-0250-04	12MAR04	T.K	K.I

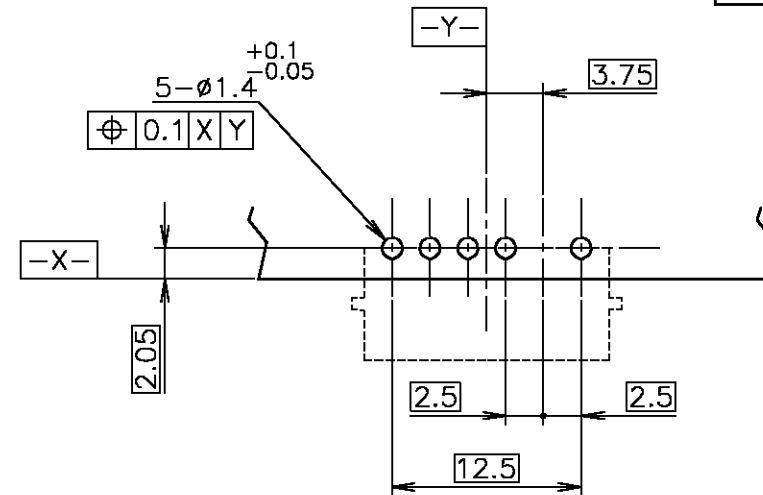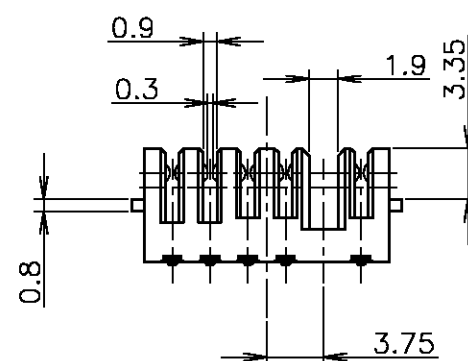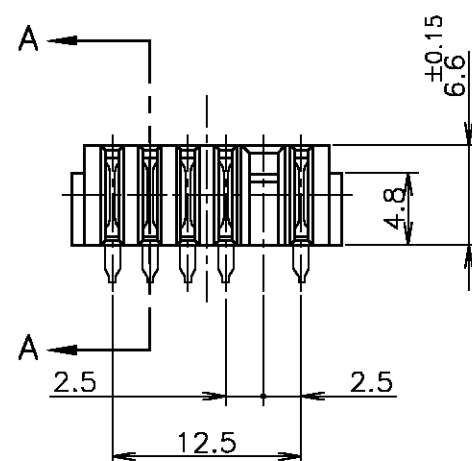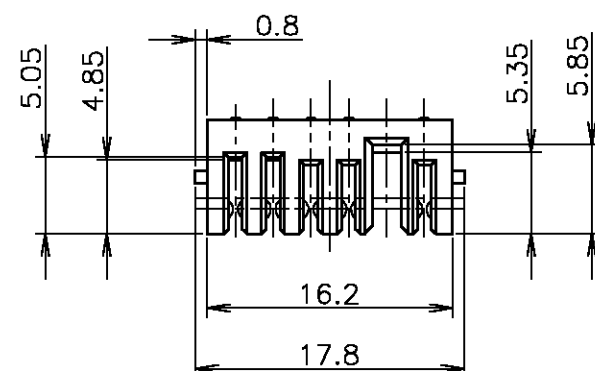

基板取付参考寸法
REFERENCE P.C. BOARD LAYOUT
P.C. BOARD THK 0.8~1.2
(VIEW FROM CONNECTOR MOUNTING SIDE)

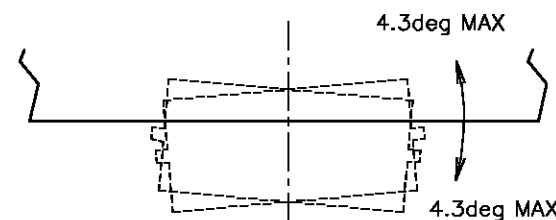
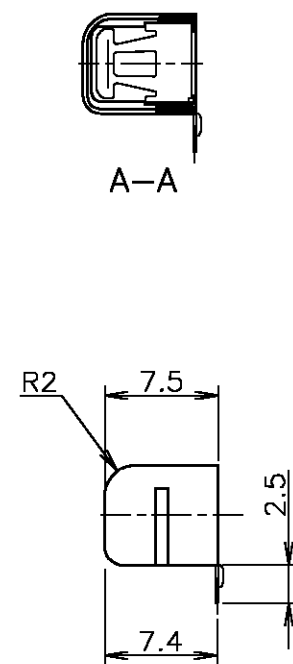


FIG.1

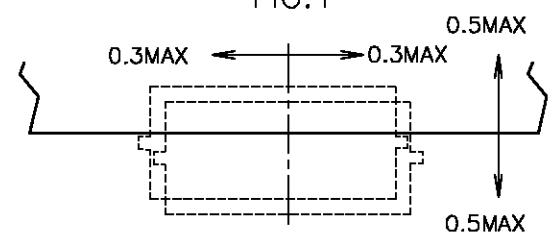


FIG.2




FIG.3

- △ 材料 ハウジング : 熱可塑性樹脂 UL94V-0
色 ; 黒
コンタクト : 銅合金
△ 仕上げ コンタクト : Ni 下地めっき
接触部 Pd-Ni めっき
接触部 Au フラッシュめっき
半田付け部 すずめっき

- 3 治具を使用せずに製品をはんだ付けする場合
下記の可能性がありますので、注意してください。

- 回転 (FIG. 1)
縦、横ずれ (FIG. 2)
基板からの脱落 (FIG. 3)

- △ MATERIAL HOUSING : THERMOPLASTIC RESIN, UL94V-0
COLOR ; BLACK
CONTACT : COPPER ALLOY
△ FINISH CONTACT : Ni ALL OVER UNDER PL
Pd-Ni PL. AT CONTACT AREA
Au FLASH PL. AT CONTACT AREA
TIN PL. AT LEAD AREA


- 3 CAUTIONS FOR SOLDERING CONNECTOR TO P.C.B.
WITHOUT INSTALLATION-GUIDE
ROTATION(FIG.1)
SLIDING(FIG.2)
FALLING FROM P.C.B.(FIG.3)

1318597-1 :AS SHOW

鉛フリー
LEAD FREE

GENERAL TOLERANCE
一般公差
10 ≥ : ±0.2
30 ≥ > 10 : ±0.25
100 ≥ > 30 : ±0.3
ANGLES : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位 : 筭
MMMATERIAL
材料TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
FINISH 仕上



DWN Y. WATANABE 01SEP99

CHK K. ASAKAWA 01SEP99

APVD I. ENOMOTO 01SEP99

PRODUCT SPEC

製品規格 108-5599

APPLICATION SPEC

取付適用規格

WEIGHT

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics AMP K.K.
Kawasaki, Japan

NAME

名称

RECEPTACLE ASSEMBLY
2.5mm PITCH BATTERY CONNECTOR (5POS.)

SIZE

A3

CAGE CODE

00779

DRAWING NO

番号

C=1318597

RESTRICTED TO

SCALE
尺度 2:1SHEET
1 OF 1REV
A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1318597-1](#)