

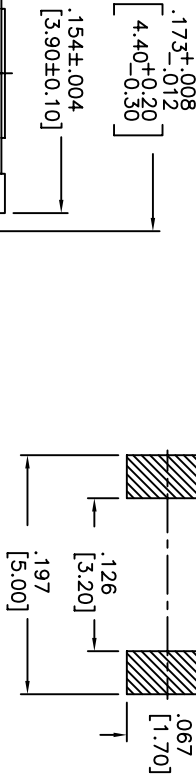


THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.

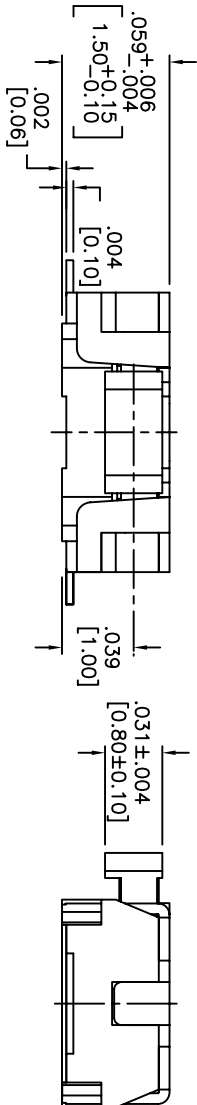

HATCHED AREA SHOWS SOLDERING LAND.
P.C.B. LAYOUT
UNLESS OTHERWISE SPECIFIED
ALL P.C. TOLERANCES ARE ±.002 [0.05]

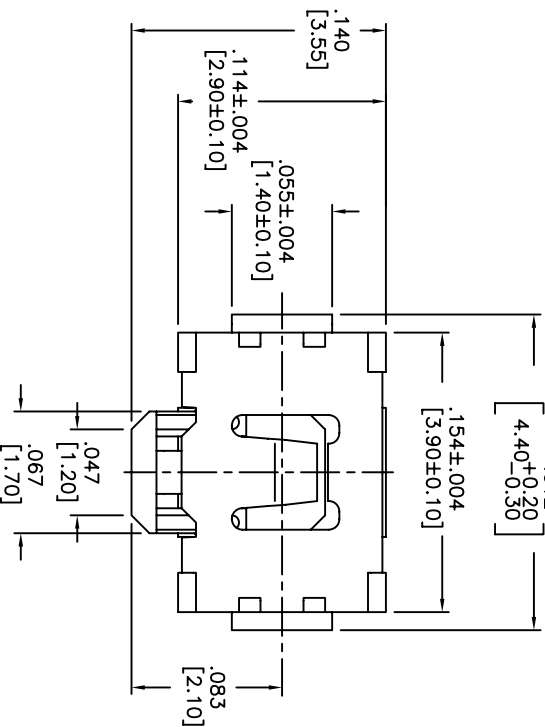

DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	A	ECO# 778	CD	PD

DESCRIPTION: SIDE PUSH
MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 220± 65gf

STROKE: 0.24±.08mm

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 100,000 CYCLES.

RATING: 50mA, 12VDC.

CONTACT RESISTANCE: 100mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

VIBRATION TEST: PASSED METHOD 201A

MIL-STD-202F.

SHOCK TEST: 50G PER METHOD 213B CONDITION A OF MIL-STD-202F

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, WHITE.

STEM: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, BLACK.

CONTACT DISK: STAINLESS STEEL

WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

PACKAGING: TAPE AND REEL

(3,500 PIECES PER REEL)

ROHS COMPLIANT

LEAD FREE SOLDERING COMPATIBLE

HAND SOLDERING: 320°C MAX WITH 30 WATT IRON



FOR 2 SECONDS

IR REFLOW: 260°C MAX




CUSTOMER PART NO.: 263262

Q.A. INSPECT.	DESIGNER'S INITIAL	DATE	DRAWING NO.	REV.
APDM	63 Neck Rd. Haverhill, MA 01830 Tel: 978-372-3534 Fax: 978-372-3534	7/31/06	AMPTFVTR	A
TITLE	SHEET	SIZE	SCALE	THIRD ANGLE PROJECTION
TACT SWITCH	1 OF 1	B	15:1	
DO NOT SCALE DRAWING				

THIS DOCUMENT IS THE PROPERTY OF APM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APM COMPONENTS INC.

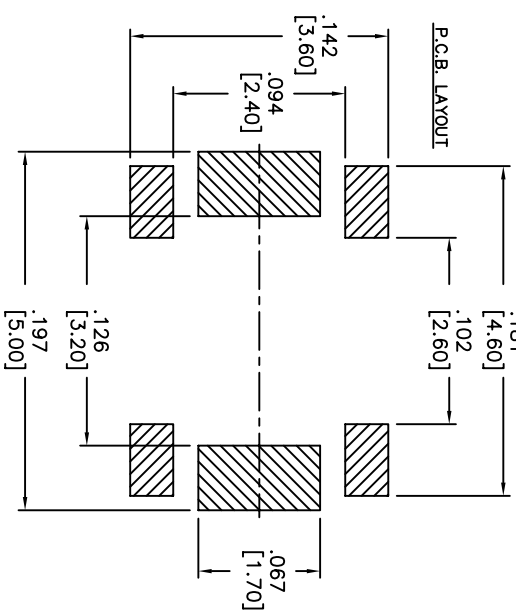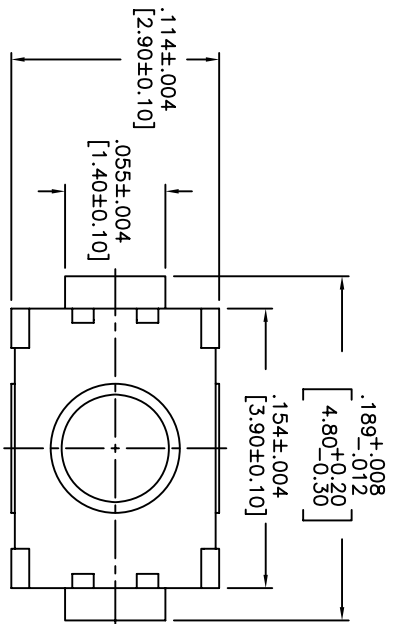

HATCHED AREA SHOWS SOLDERING LAND

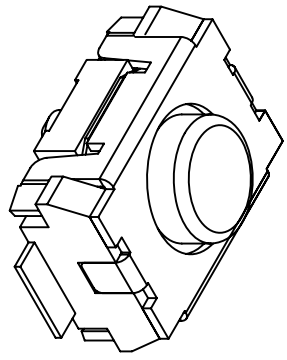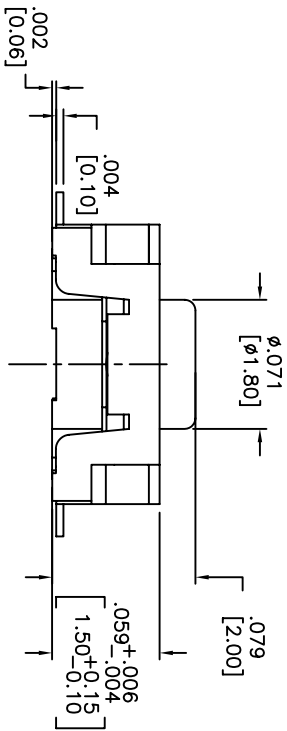

CIRCUIT


DATE	SYM	REVISION	RECORD	DWN.	CK.
5/08	B	ECO# 778		CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 160±50gf
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30°C TO +80°C.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50ma, 12VDC.
VIBRATION RESISTANCE: PASSES METHOD 201A MIL-STD-202F
SHOCK RESISTANCE: 50G PER METHOD 213B MIL-STD-202F
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR, WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR, BLACK
CONTACT DISK: STAINLESS STEEL WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
TAPE: TEFLON.
TAPE & REEL PACKAGING, 2,000 PER REEL
SOLDERING: HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS
IR REFLOW: 240°C MAX
RoHS COMPLIANT


Q.A. INSPECT:		63 Neck Rd. Haverhill, MA 01830 Phone: 978-372-3534 Fax: 978-372-3534		DRN. CJD
DESIGNER'S INITIALS	APM	BR.	OK.	PJD
TOLERANCES (UNLESS OTHERWISE SPECIFIED)				
.XX±.XX(X)				
.XX±.XX(X)				
.XX±.XX(X)				
ANGLE = 30.5°				
DO NOT SCALE	DATE	DRAWING NO.	REV.	
	2/4/08	AMPTFGP2VTR	B	

THIS DOCUMENT IS THE PROPERTY OF APEM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APEM COMPONENTS INC.


DATE	SYM	REVISION RECORD	DWN.	CK.
01/06	A	ECO # 526	CD	PD
5/08	B	ECO# 778	CD	PD

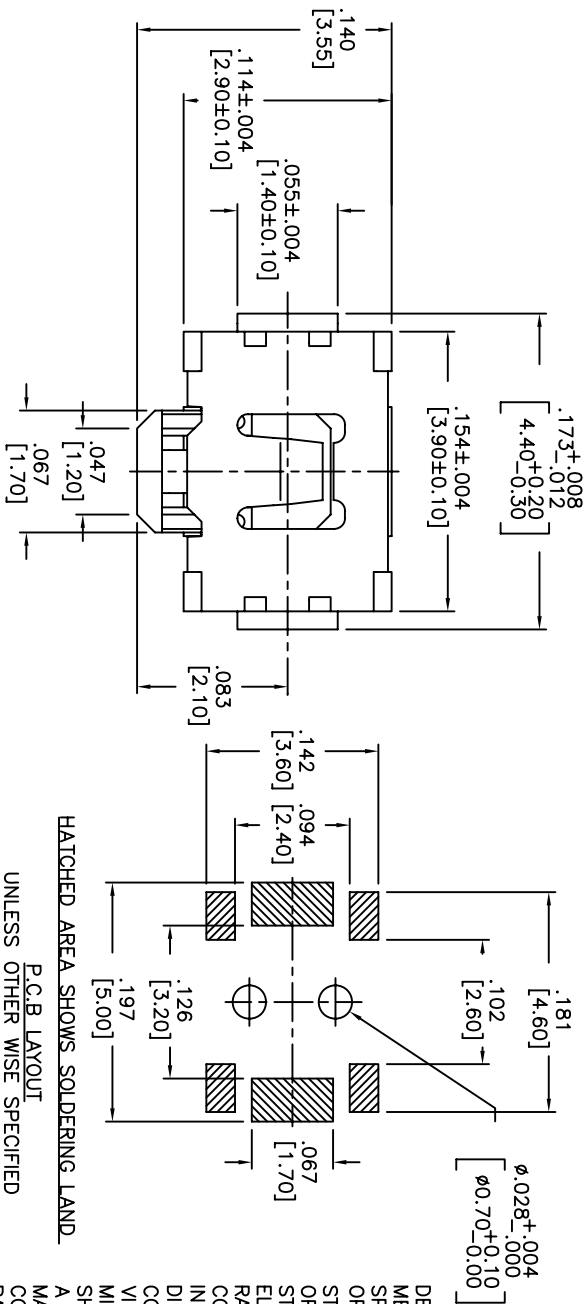

HATCHED AREA SHOWS SOLDERING LAND.
P.C.B. LAYOUT
UNLESS OTHERWISE SPECIFIED
ALL P.C. TOLERANCES ARE ±.002 [0.05]

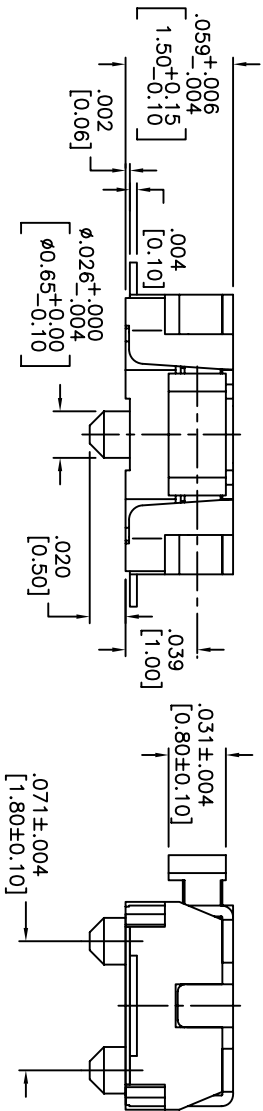





CIRCUIT



DESCRIPTION: SIDE PUSH
MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 220 ± 65gf
STROKE: 0.2 ± 0.05mm
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30° TO +80°.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50mA, 12VDC.
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
VIBRATION TEST: PASSED METHOD 201A
MIL-STD-202F.
SHOCK TEST: 50G PER METHOD 213B CONDITION
A OF MIL-STD-202F
MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: BLACK.
CONTACT DISK: STAINLESS STEEL
WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
PACKAGING: TAPE AND REEL
(3,500 PEICES PER REEL)
ROHS COMPLIANT
HAND SOLDERING: 320°C MAX WITH 30 WATT IRON
FOR 2 SECONDS
IR REFLOW: 240°C MAX

Q.A. INSPECT.	DESIGNATES CRITICAL	INCH	SHEET	SIZE	SCALE	THIRD ANGLE PROJECTION	REV.
APM	1 OF 1	B	15:1	CD	PD		
TITLE	TACT SWITCH						
DATE	06/30/05	DRAWING NO.	AMPTCFGVTR				
DO NOT SCALE							

THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.

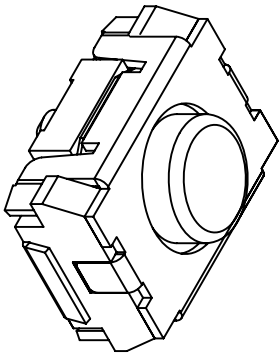
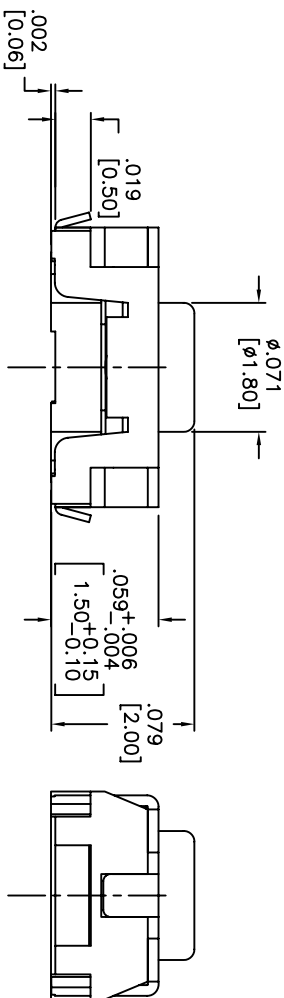
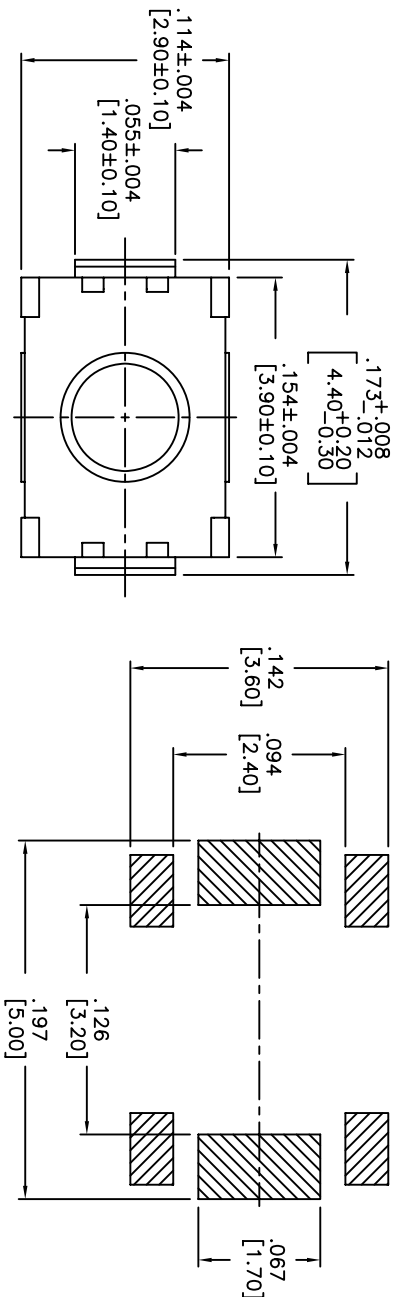


DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	B	ECO# 778	CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 160± 50gf
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30°C TO +80°C.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50mA, 12VDC.
VIBRATION RESISTANCE: PASSES METHOD 201A
MIL-STD-202F
SHOCK RESISTANCE: 50G PER METHOD 213B
MIL-STD-202F
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: BLACK.
CONTACT DISK: STAINLESS STEEL
WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
TAPE: TEFLON.
TAPE & REEL PACKAGING, 2,000 PER REEL
SOLDERING:
HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS
IR REFLOW: 240°C MAX
RoHS COMPLIANT

Q.A. INSECT.		Q.A. INSECT.		Q.A. INSECT.	
DESIGNATES CRITICAL DIMENSION		DESIGNATES CRITICAL DIMENSION		DESIGNATES CRITICAL DIMENSION	
TOLERANCES (UNLESS OTHERWISE SPECIFIED)		TOLERANCES (UNLESS OTHERWISE SPECIFIED)		TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.XX = ±.02(0.5)		.XX = ±.02(0.5)		.XX = ±.02(0.5)	
.XXX = ±.008(0.20)		.XXX = ±.008(0.20)		.XXX = ±.008(0.20)	
.XXXX = ±.0008(0.02)		.XXXX = ±.0008(0.02)		.XXXX = ±.0008(0.02)	
ANGLE = ±0.5°		ANGLE = ±0.5°		ANGLE = ±0.5°	
DO NOT SCALE DRAWING		DO NOT SCALE DRAWING		DO NOT SCALE DRAWING	
DATE		DRAWING NO.		REV.	
2/4/08		AMPTLGP2VTR		B	

THIS DOCUMENT IS THE PROPERTY OF APEM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APEM COMPONENTS INC.

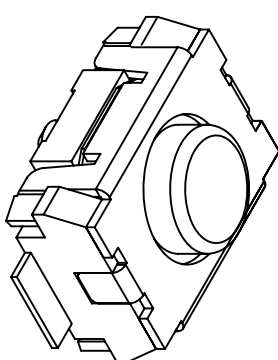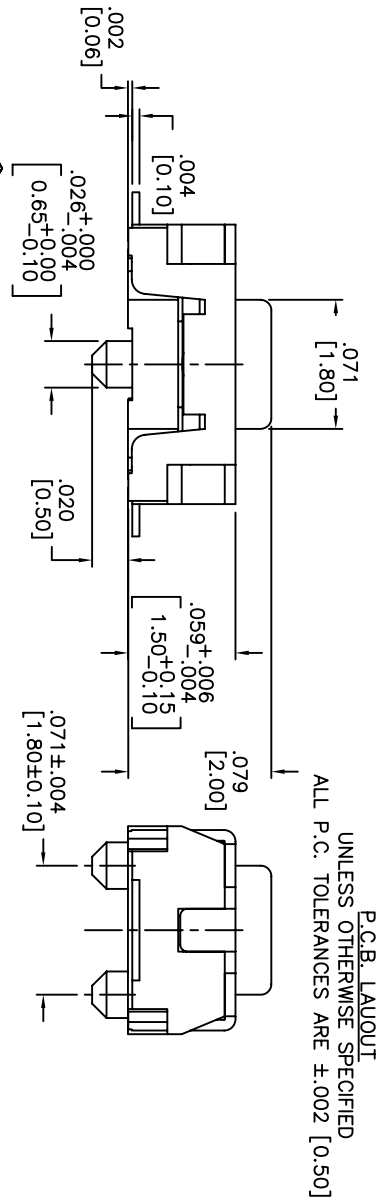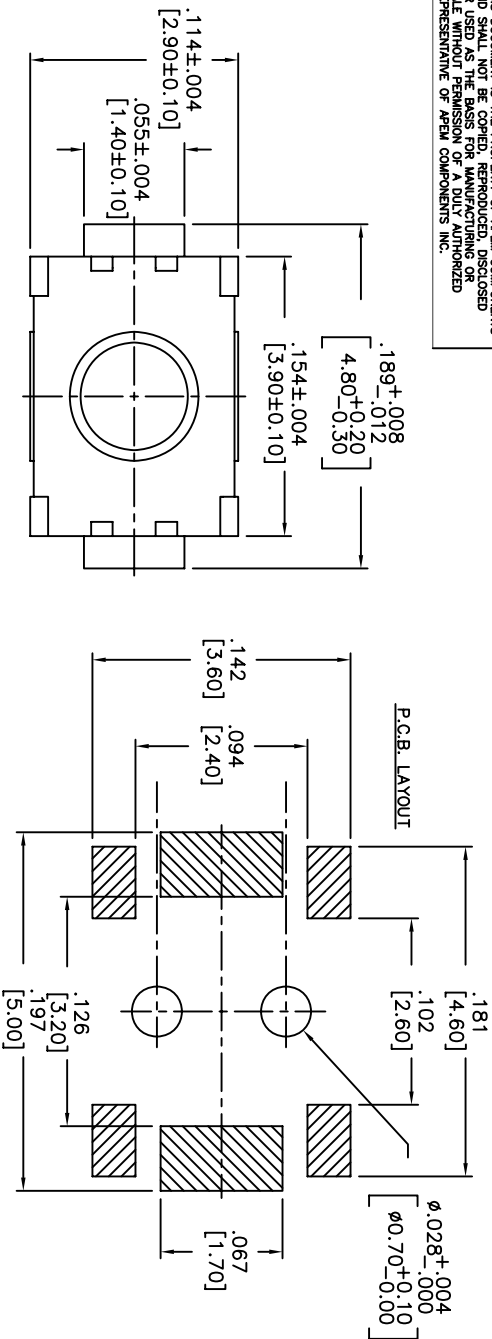

DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	B	ECO# 778	CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.

SPECIFICATIONS:

OPERATION FORCE: 160[±] 50gf

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 200,000 CYCLES.

RATING: 50ma, 12VDC.

VIBRATION RESISTANCE: PASSES METHOD 201A

MIL-STD-202F

SHOCK RESISTANCE: 50G PER METHOD 213B

MIL-STD-202F

CONTACT RESISTANCE: 100mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

TRAVEL: .005 ^{+.002}_{-.002} [0.13 ^{+.002}_{-.002}]

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, WHITE.

STEM: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, BLACK.

CONTACT DISK: STAINLESS STEEL

WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TAPE: TEFLON.

TAPE & REEL PACKAGING, 2,000 PER REEL

SOLDERING:

HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS





IR REFLOW: 240°C MAX

RoHS COMPLIANT

Q.A. INSPECT.	DESIGNATES CRITICAL DIMENSION	TOLERANCES (UNLESS AS NOTED)	ANGLE = 40.5°
INCH	1 OF 1	SIZE	SCALE
15:1	THIRD ANGLE PROJECTION		
TITLE: TACT SWITCH			
DATE: 6/30/05	DRAWING NO. AMPTCFGP2VTR	REV. B	

THIS DOCUMENT IS THE PROPERTY OF APM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APM COMPONENTS INC.

DATE	SYM	REVISION RECORD	DWN.	CK.
1/06	B	ECO# 526	CD	PD
5/06	C	ECO# 778	CD	PD

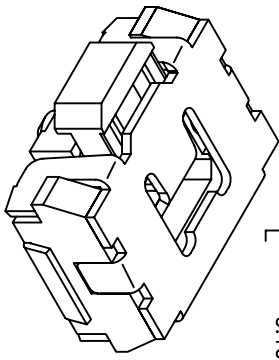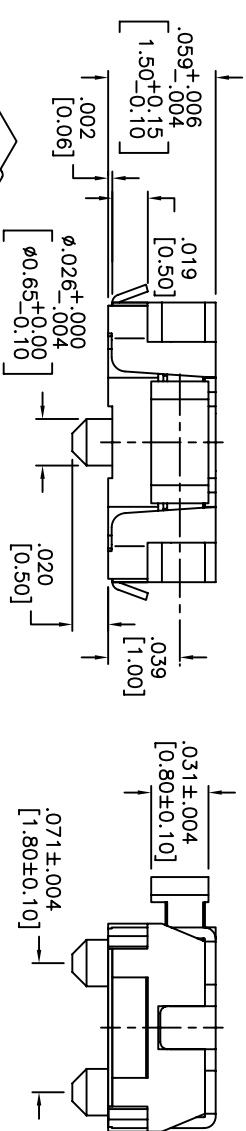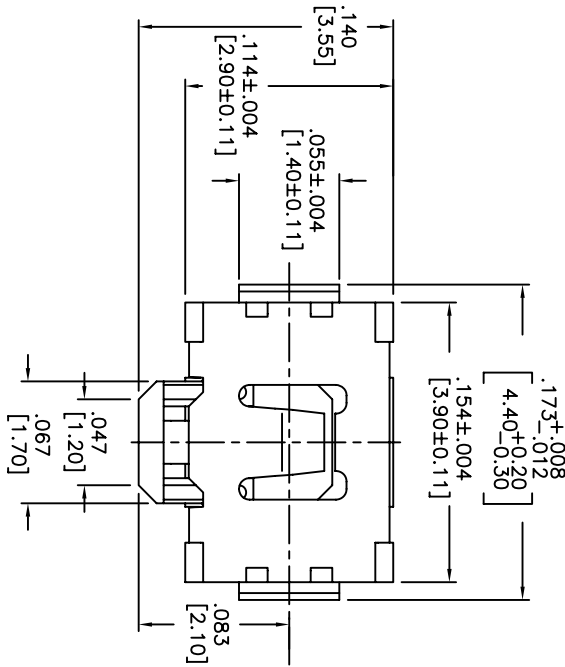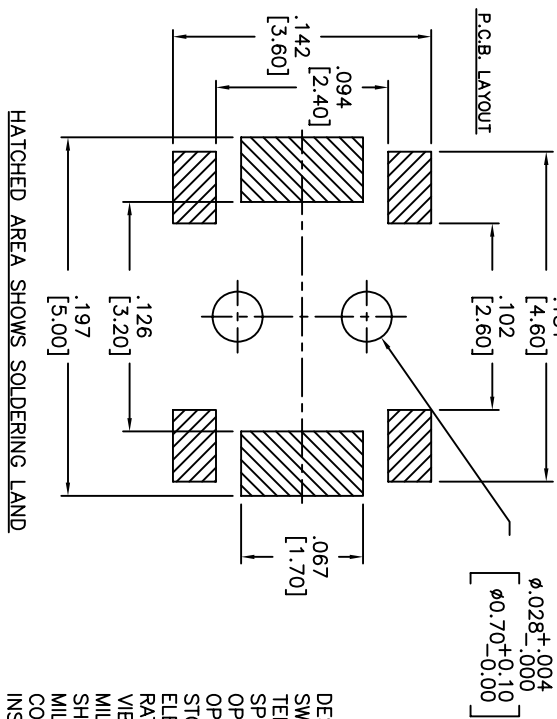

CIRCUIT

DESCRIPTION: SIDE PUSH MECHANICAL CONTACT SWITCH, WITH BENDING AND GROUNDING TERMINALS.

SPECIFICATIONS:




OPERATION FORCE: 220± 65gf
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30°C TO +80°C.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50mA, 12VDC.
VIBRATION RESISTANCE: PASSES METHOD 201A MIL-STD-202F
SHOCK RESISTANCE: 50G PER METHOD 213B MIL-STD-202F
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
STROKE: .008 +.004 [0.2 +0.05]

MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: BLACK.
CONTACT DISK: STAINLESS STEEL
WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
TAPE: TEFLON, 3500 PER REEL
HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS
IR REFLOW: 240°C MAX
RoHS COMPLIANT

Q.A. INSPECT: [Signature]
DESIGNATES CRITICAL DIMENSION
TOLERANCES (UNLESS OTHERWISE SPECIFIED)
XXX+/-0.004 [0.20]
XXX+/-0.008 [0.02]
XXX+/-0.0008 [0.02]
ANGLE = 10.5°

DATE	06/30/05	DRAWING NO.	AMPTCLGVTB	REV	C
TITLE: TACT SWITCH					
APM COMPONENTS INC. 63 Neck Rd. Foxboro, MA 01935 Tel: 508-547-3534 Fax: 508-547-3534					
DESIGN: CJD					
BR: PJD					
THIRD ANGLE PROJECTION					
INCH 1 OF 1 SHEET SIZE B SCALE 15:1					
TOLERANCES (UNLESS OTHERWISE SPECIFIED)					
XXX+/-0.004 [0.20]					
XXX+/-0.008 [0.02]					
XXX+/-0.0008 [0.02]					
ANGLE = 10.5°					
DO NOT SCALE DRAWING					


THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.

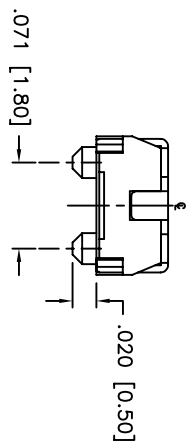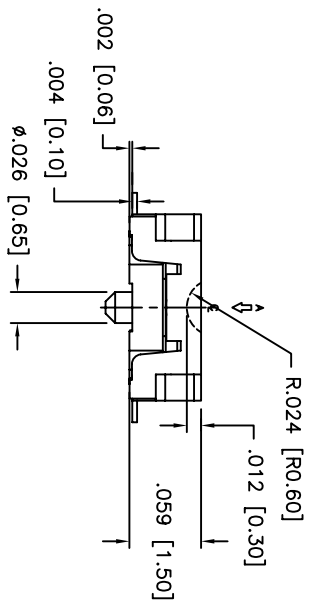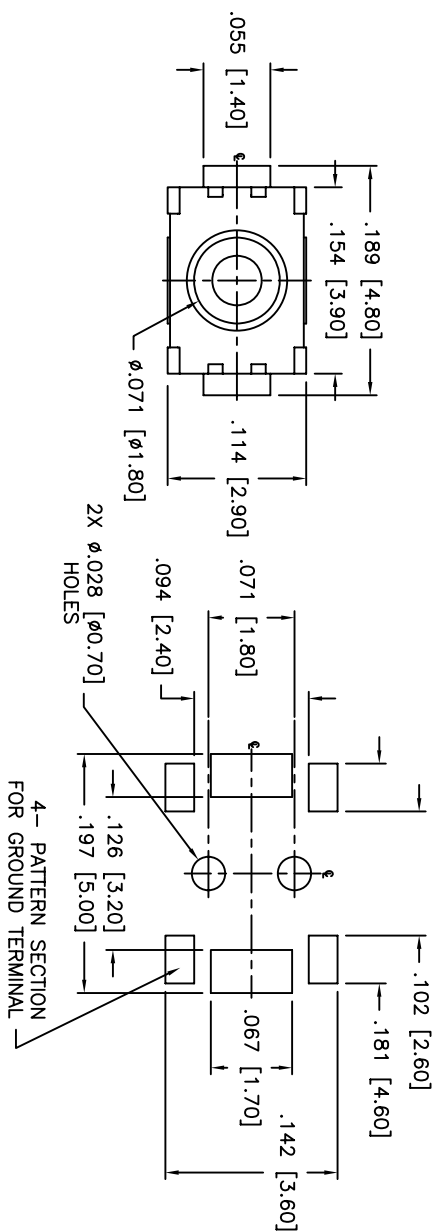

4- PATTERN SECTION FOR GROUND TERMINAL

UNLESS OTHERWISE SPECIFIED P.C. TOLERANCES ARE ±.002 [0.05]

P.C. LAYOUT



SCHEMATIC

DATE	SYM	REVISION RECORD	DMN.	CK.
1/06	A	ECO # 526	CD	PD
5/06	B	ECO# 778	CD	PD

DESCRIPTION: SPST, NORMALLY OPEN, MOMENTARY, SURFACE MOUNT TACT SWITCH WITH LOCATING PINS

SPECIFICATIONS:

CONTACT RATING: 50mA @ 12VDC
INITIAL CONTACT RESISTANCE: 100MOHMS MAX.
INSULATION RESISTANCE: 100MOHMS MIN. @ 500VDC
DIELECTRIC STRENGTH: 100VAC FOR 1 MINUTE
ELECTRICAL LIFE: 200,000 CYCLES MIN.
OPERATING TEMPERATURE RANGE: -25°C to +70°C
STOP STRENGTH: MAX 3kgf VERTICAL STATIC LOAD
CONT. FOR 15 SEC.

ACTUATION FORCE: 160± 50gf
STORAGE TEMPERATURE RANGE: -30°C TO +80°C
SHOCK RESISTANCE: 50G PER METHOD 213B, MIL-STD-202F
VIBRATION RESISTANCE: PASSES METHOD 201A, MIL-STD-202F
SOLDERING: 240°C MAX.
IR REFLOW: 350°C MAX. FOR 3 SECONDS MAX.
HAND SOLDERING: (30 WATT IRON MAX.)


MATERIALS:
BASE: LCP HIGH-TEMP THERMOPLASTIC UL94V-0
ACTUATOR: LCP HIGH-TEMP THERMOPLASTIC UL94V-0
COVER: STAINLESS STEEL
TERMINALS: SILVER PLATED BRASS
SHORTING CONTACT: STAINLESS STEEL WITH SILVER CLADDING
TAPE: TEFLON
RoHS COMPLIANT

NOTE:
1. AFTER SOLDERING, RETURN SWITCHES TO NORMAL TEMPERATURE BEFORE WASHING.

Q.A. INSPECT.		DESIGNER'S INITIAL		DATE		DRAWING NO.	
APDM		63 Neck Rd. 01850 Haverhill, MA Tel: 978-372-3534 Fax: 978-372-3534		07/20/05		AMPTCFG1VTR	
TOLERANCES (UNLESS AS NOTED) .XX±.XX[0.5] .XXX±.008[0.20] .XXXX±.0008[0.02] ANGLE = ±0.5°		SHEET 1 OF 1		SIZE B		SCALE 10:1	
TITLE TACT SWITCH WITH LOCATING PINS		THIRD ANGLE PROJECTION		REV B			

THIS DOCUMENT IS THE PROPERTY OF APEM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APEM COMPONENTS INC.

P.C.B. LAYOUT

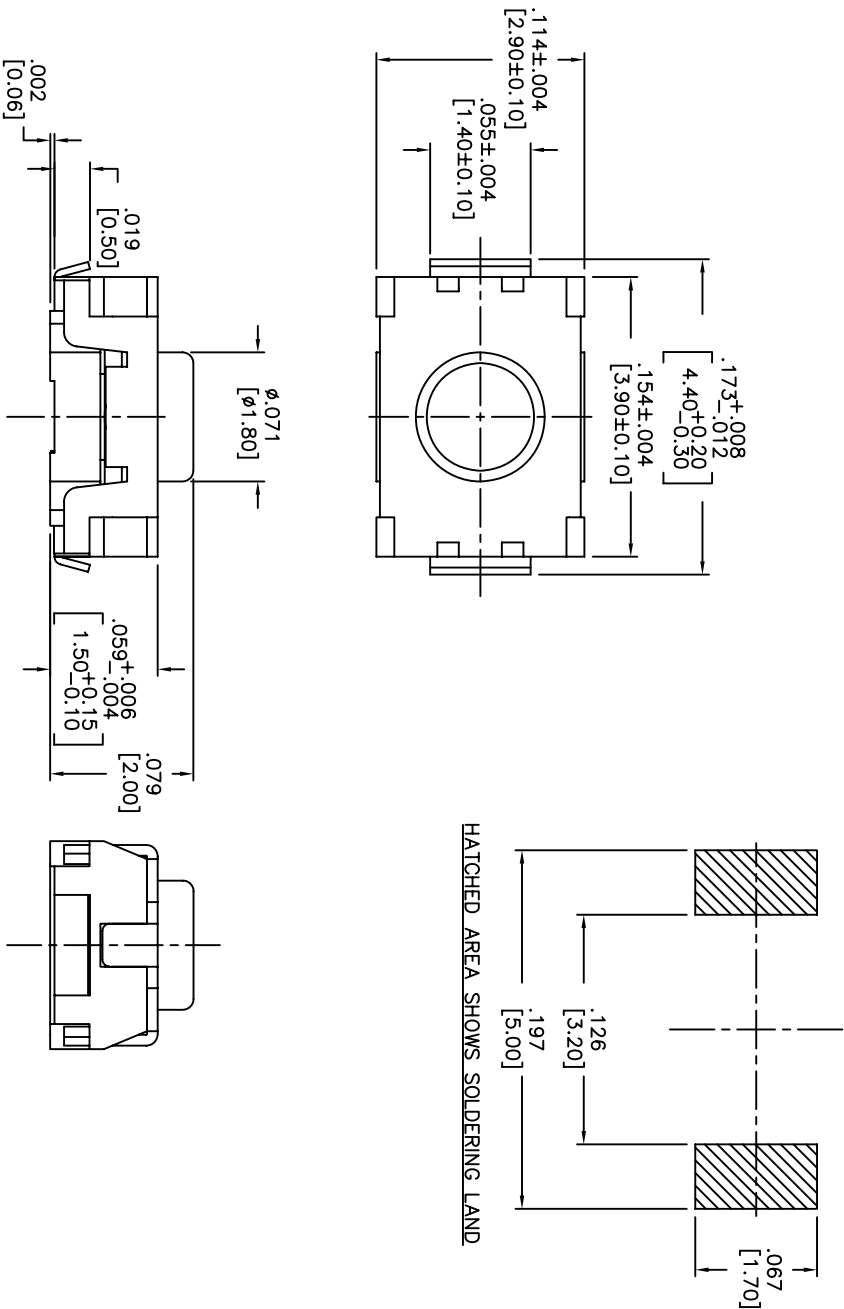

HATCHED AREA SHOWS SOLDERING LAND

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.

SPECIFICATIONS:

OPERATION FORCE: 220 $\pm$ 65gf

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 200,000 CYCLES.

RATING: 50mA, 12VDC.

VIBRATION RESISTANCE: PASSES METHOD 201A

MIL-STD-202F

SHOCK RESISTANCE: 50G PER METHOD 213B

MIL-STD-202F

CONTACT RESISTANCE: 100m Ω MAX.

INSULATION RESISTANCE: 100M Ω MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, WHITE.

STEM: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, BLACK.

CONTACT DISK: STAINLESS STEEL WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TAPE: TEFLON.

TAPE & REEL PACKAGING, 2,000 PER REEL

SOLDERING:


HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS

IR REFLOW: 240°C MAX

RoHS COMPLIANT

LEAD FREE PROCESS COMPATIBLE



CIRCUIT



Q.A. INSPECT.		DESIGNATES CRITICAL DIMENSION		TOLERANCES (UNLESS AS NOTED)		ANGLE = 40.5°	
APCM		63 Neck Rd. 01835		100X=±.008[0.20]		1000X=±.0008[0.02]	
TITLE		SHEET		SIZE		SCALE	
TACT		1 OF 1		B		15:1	
SWITCH		DATE		DRAWING NO.		REV	
		01/23/06		AMPTLP2VTR		B	

THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.

P.C.B. LAYOUT

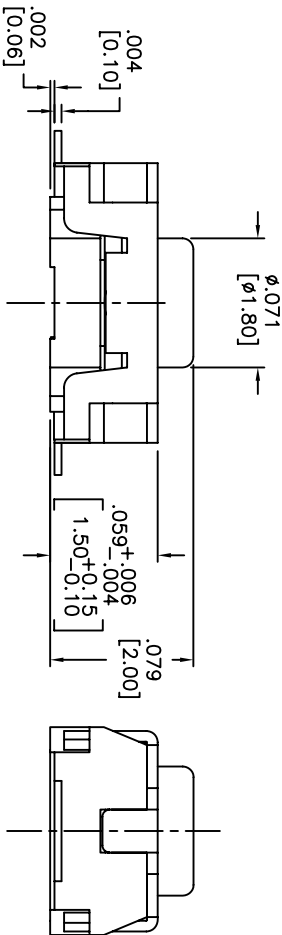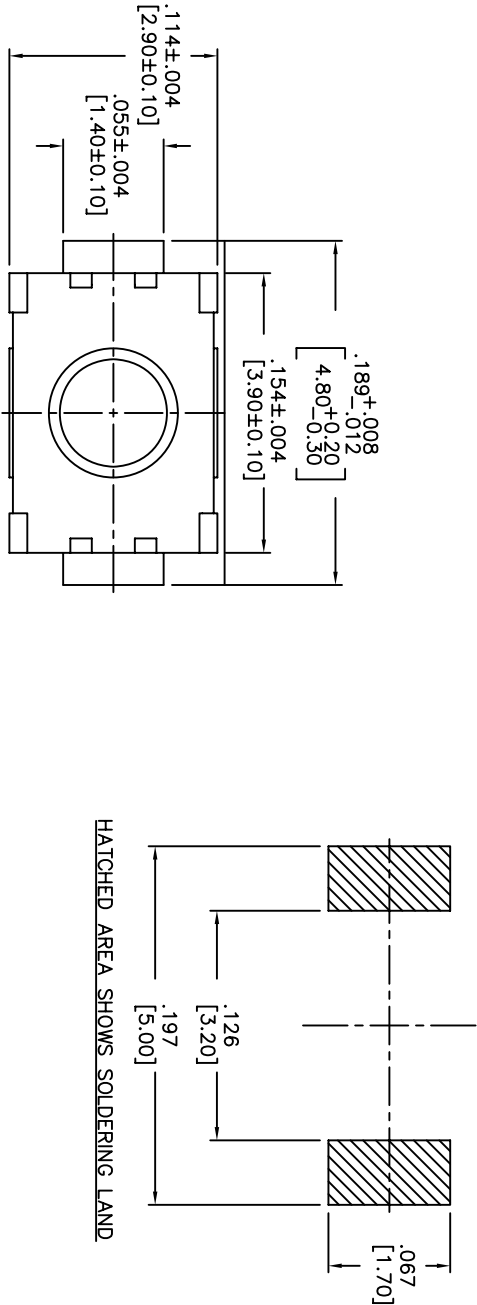

DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	B	ECO# 778	CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.

SPECIFICATIONS:

OPERATION FORCE: 160± 50gf

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 200,000 CYCLES.

RATING: 50mA, 12VDC.

VIBRATION RESISTANCE: PASSES METHOD 201A

MIL-STD-202F

SHOCK RESISTANCE: 50G PER METHOD 213B

MIL-STD-202F

CONTACT RESISTANCE: 100mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, WHITE.

STEM: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, BLACK.

CONTACT DISK: STAINLESS STEEL

WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TAPE: TEFLON.

TAPE & REEL PACKAGING, 2,000 PER REEL

SOLDERING:


HAND SOLDERING: 30 WATT IRON AT 320°C FOR

2 SECONDS

IR REFLOW: 260°C MAX

RoHS COMPLIANT

LEAD FREE PROCESS COMPATIBLE



CIRCUIT

Q.A. INSPECT:		DESIGNATES CRITICAL DIMENSION		TOLERANCES (UNLESS OTHERWISE SPECIFIED)		ANGLE = 40.5°	
APDM		63 Neck Rd. Haverhill, MA 01830		1 OF 1		15:1	
TITLE		TACT SWITCH		THIRD ANGLE PROJECTION		REV	
DATE		01/23/06		DRAWING NO.		AMPTFP2VTR	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apem:](#)

[AMPTCFGVTR](#) [AMPTCLGP2VTR](#) [AMPTCLGVTR](#) [AMPTFGVTR](#) [AMPTLGVTR](#)