


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		F	REVISED PER ECO-08-007327	05SEP08	BM	WM

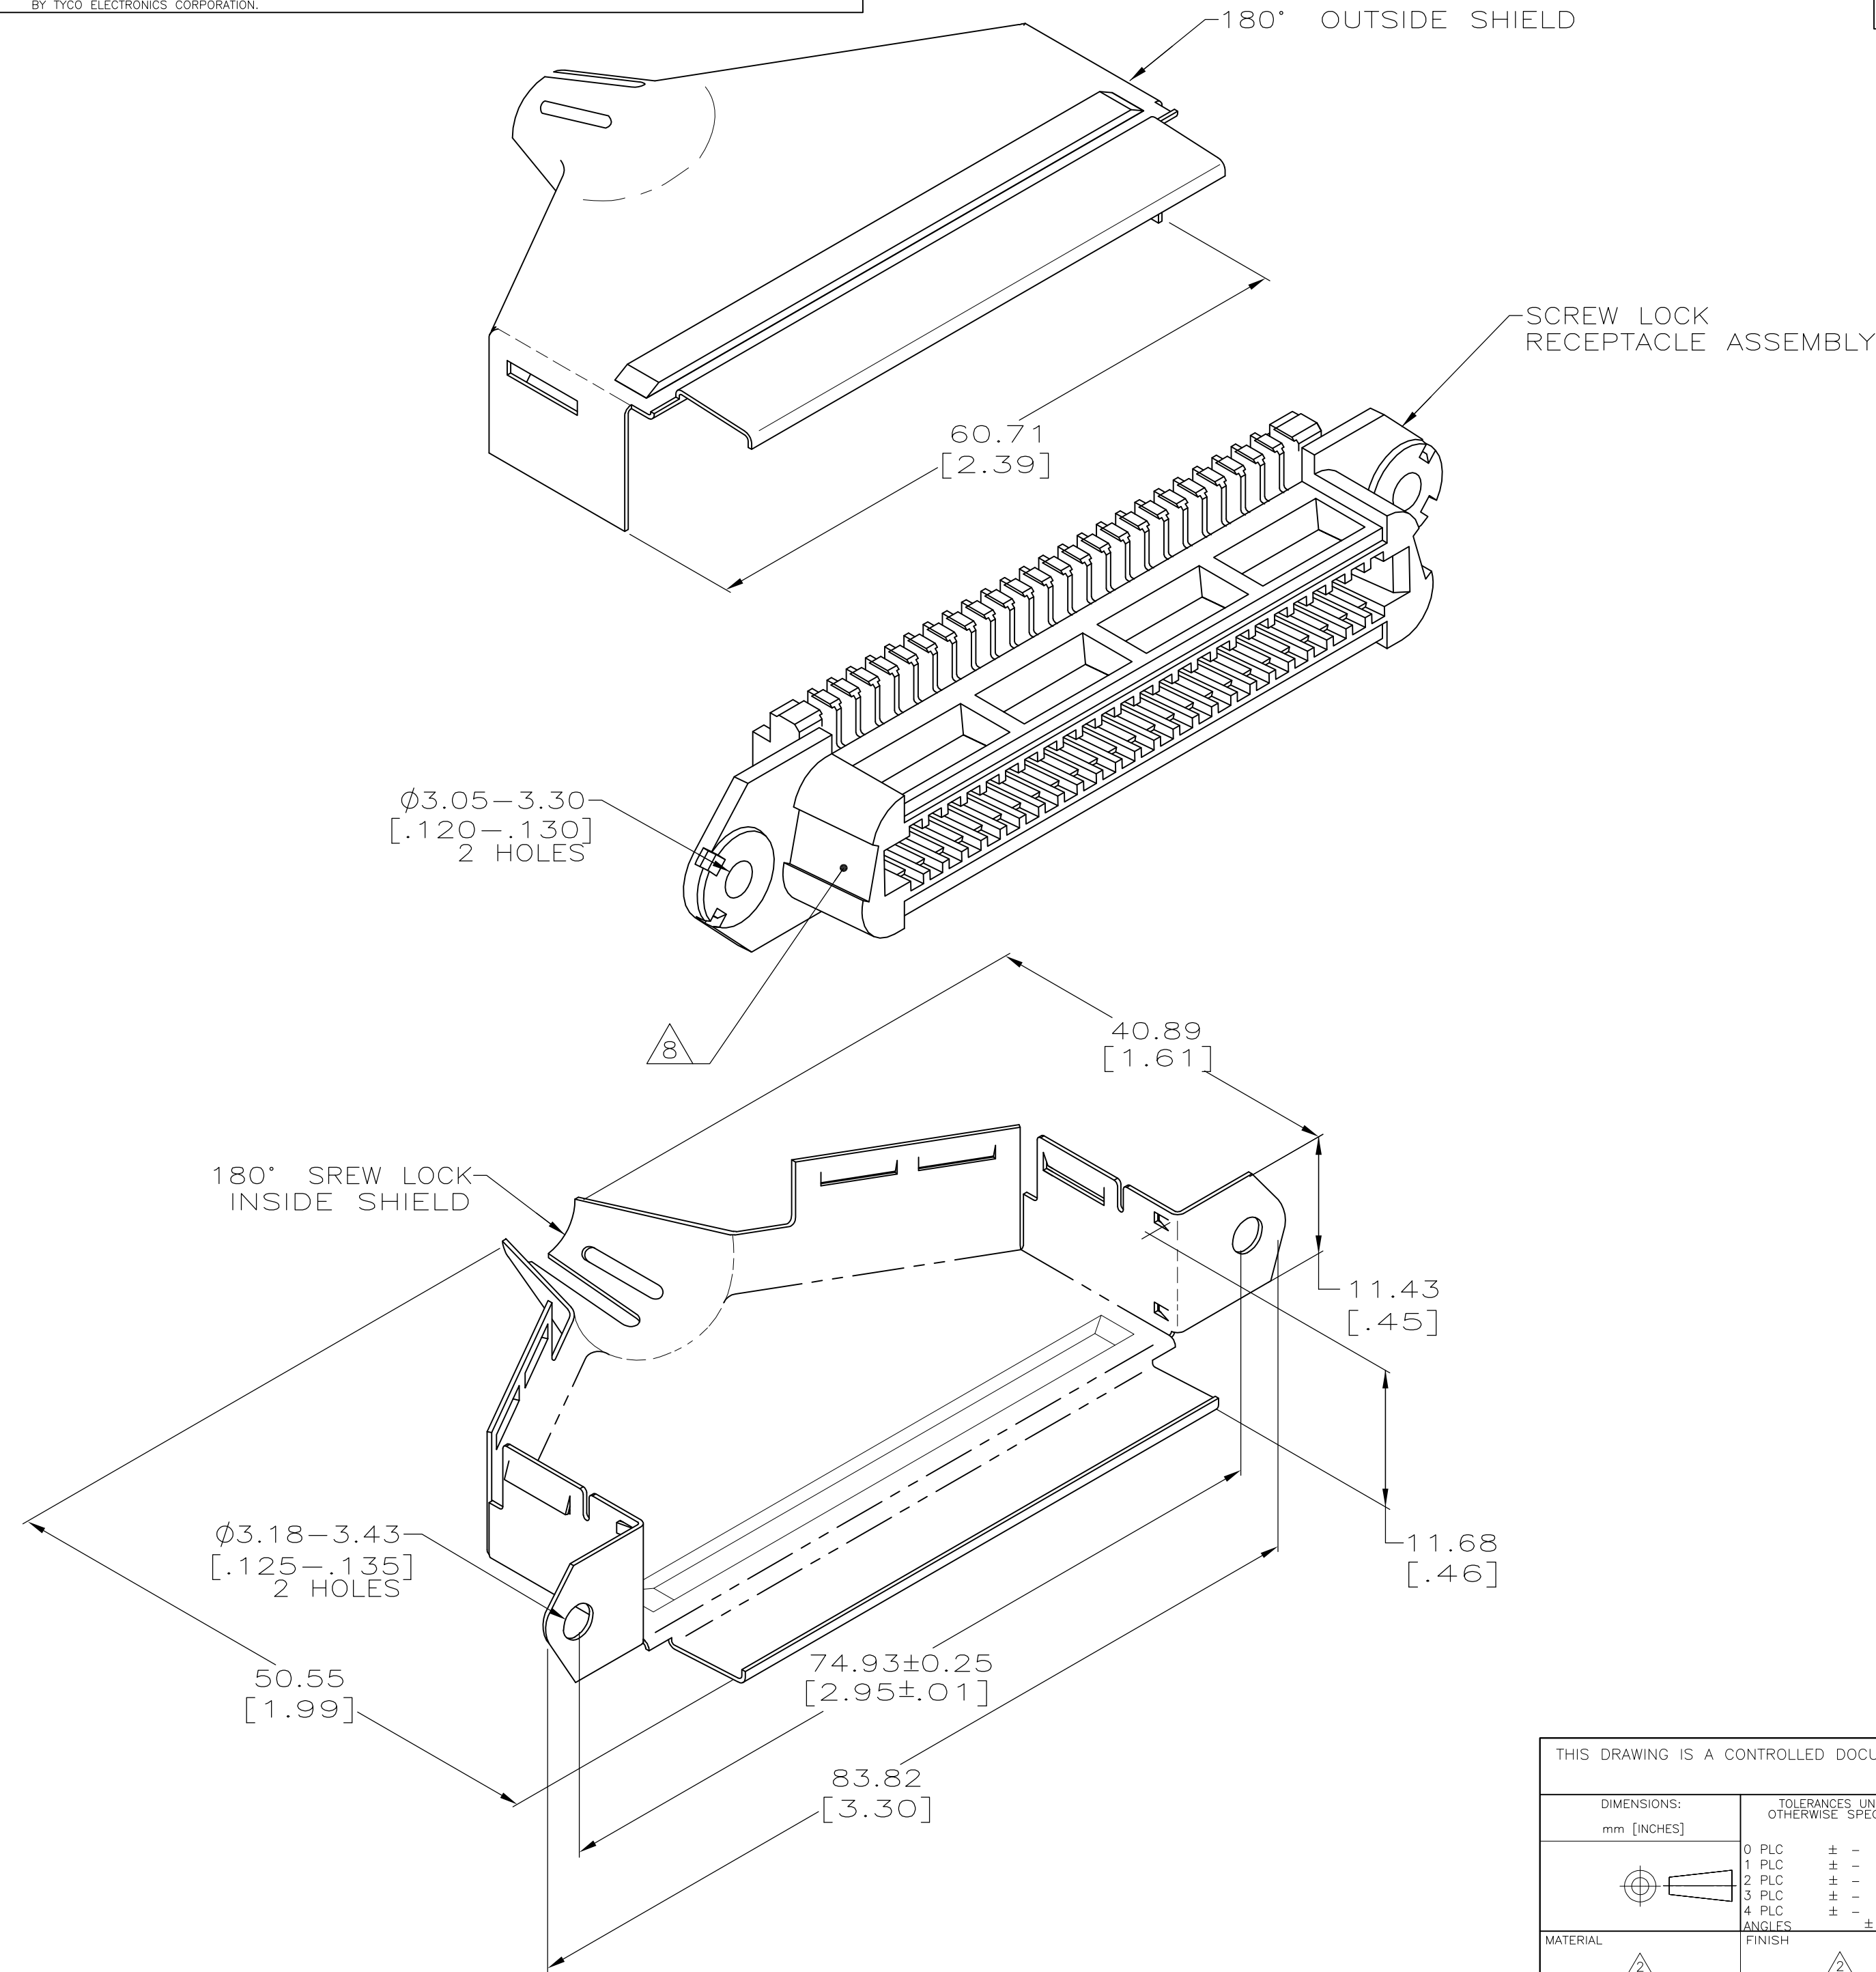

1. THIS KIT SHIPPED NOT ASSEMBLED.
- 2 MATERIAL: SHIELDS – BRIGHT NICKEL PLATED CARBON STEEL.
PLUG HOUSING – POLYPHENYLENE OXIDE, BLACK.
TERMINAL – HIGH STRENGTH COPPER ALLOY PLATED WITH 0.76µm [.000030] MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76µm [.000030] MIN TOTAL ON MATING SURFACE. 1.27µm [.000050] MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
- 3 WIRE SIZE: 26-27-28 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF 1.14 [.045] IS ACCEPTABLE FOR MOST APPLICATIONS.
4. CABLE RANGE: Ø8.89-15.88 [.350-.625].
5. CENTER-TO-CENTER SPACING OF TERMINALS 2.16 [.085] NOMINAL.
- 6 WIRE SIZE: 24 OR 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF 1.14 [.045] IS ACCEPTABLE FOR MOST APPLICATIONS.
- 7 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 8 CORING IS AN OPTIONAL CONFIGURATION AND IS AT THE DISCRETION OF AMP INCORPORATED.
- 9 PACKAGED 1 KIT PER POLYBAG.

9	B	6	554955-2
9	E	3	554955-1
PACKAGED	SLOT SIZE	WIRE SIZE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	T. CANTY	28-MAR-86	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
		CHK	B. FOX	15-MAY-86			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME B. HUTCHENS		
		0 PLC	± -				
		1 PLC	± -		PRODUCT SPEC		
		2 PLC	± -	7			
		3 PLC	± -		APPLICATION SPEC		
		4 PLC	± -				
		ANGLES	± -		SIZE		
		FINISH	± -				
MATERIAL					WEIGHT	-	
					CUSTOMER DRAWING		
					SCALE	2:1	
					SHEET	1 of 1	
					REV	F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[554955-2](#)