

## AC Filter 2-Stage, Broad Band Attenuation



Quick connect terminals 6.3x0.8 mm  
Case MB



Quick connect terminals 6.3x0.8 mm  
Case MF



Quick connect terminals 6.3x0.8 mm  
Case 09

See below:

### Approvals and Compliances

#### Description

- Line filter in standard and medical version
- 2 positions
- 3 Designs:

#### Unique Selling Proposition

- Broad band attenuation
- 3 Filter designs for various applications
- Completely closed steel housing
- Wide temperature range

#### Characteristics

- Designed for current applications of 1 - 36 A
- Protection against interference voltage from the mains  
Possible interferences generated in the equipment are strongly attenuated
- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
- Suitable for use in equipment according to IEC/UL 62368-1  
Suitable for use in medical equipment according to IEC/UL 60601-1

#### Other versions on request

- Version with wire connection
- Version with varistor for overvoltage protection

#### References

Alternative: Standard version

#### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

#### Technical Data

|                                 |                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------|
| Ratings IEC                     | 1 - 36A @ Ta 40 °C / 250VAC; 50Hz                                                           |
| Ratings UL/CSA                  | 1 - 30A @ Ta 40 °C / 125/250VAC; 60Hz                                                       |
| Leakage Current                 | standard < 0.5 mA (250 V / 60Hz)<br>medical (M5) < 5 µA resp. (M80) < 80 µA (250 V / 60 Hz) |
| Dielectric Strength             | 1.7kVDC between L-N<br>2.75kVDC between L/N-PE<br>Test voltage (2 sec)                      |
| Allowable Operation Temperature | -40°C to 100°C                                                                              |
| Climatic Category               | 40/100/21 acc. to IEC 60068-1                                                               |
| IP-Protection                   | from rear-side IP20 IEC 60529                                                               |
| Protection Class                | Suitable for appliances with protection class I acc. to IEC 61140                           |
| Terminal                        | Quick connect terminal 6.3 x 0.8 mm<br>Bolt and nut M4                                      |
| Material: Housing               | Metal                                                                                       |

|             |                                                                                                        |
|-------------|--------------------------------------------------------------------------------------------------------|
| Line Filter | Standard and Medical Version, IEC 60939, UL 1283, CSA C22.2 no. 8<br><a href="#">Technical Details</a> |
| MTBF        | > 200'000h acc. to MIL-HB-217 F                                                                        |

#### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: FMBB NEO

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                  |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | Certificate Number: 40030410 |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E72928       |

## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard         | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60320-1      | Appliance couplers for household and similar general purposes         |
|  | Designed according to | IEC 60939        | Passive filters for suppressing electromagnetic interference          |
|  | Designed according to | IEC 60127-6      | Miniature fuses. Part 6. Fuse-holders for miniature fuse-links        |
|  | Designed according to | UL 498           | Standard for Attachment Plugs and Receptacles                         |
|  | Designed according to | UL 1283          | Electromagnetic interference filters                                  |
|  | Designed according to | CSA C22.2 no. 42 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |
|  | Designed according to | CSA C22.2 no. 8  | Electromagnetic interference (EMI) filters                            |

## Application standards

Application standards where the product can be used

| Organization                                                                       | Design                         | Standard       | Description                                                                                                          |
|------------------------------------------------------------------------------------|--------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |
|  | Designed for applications acc. | IEC 60601-1    | Medical electrical equipment - Part 1: General requirements for basic safety and essential performance               |


## Compliances

The product complies with following Guide Lines

| Identification                                                                     | Details                                      | Initiator   | Description                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |
|  | <a href="#">Medical Technology</a>           | SCHURTER AG | Suitable for use in medical equipment according to IEC/UL 60601-1                                                                                                                                     |

## Dimension [mm]


Case 09 with quick connect terminals

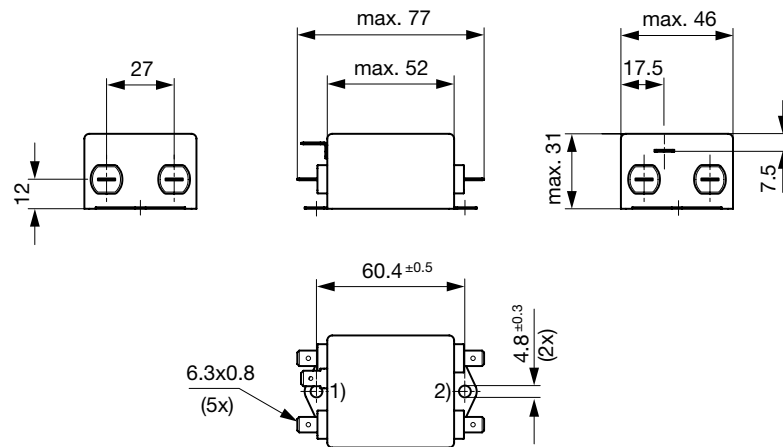

1) Line

2) Load


Case MB with quick connect terminals

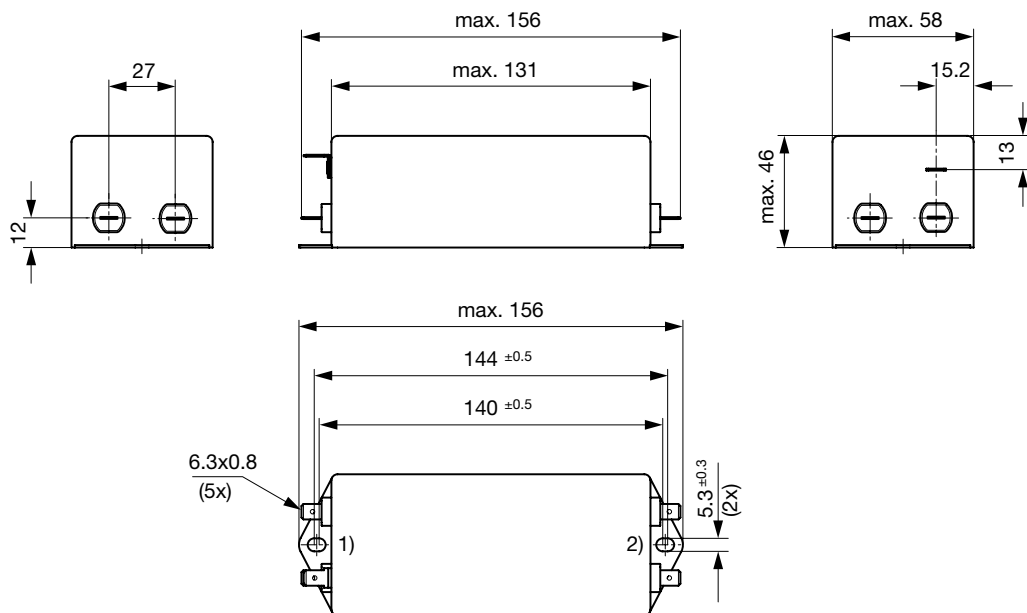

1) Line


2) Load

## Case MB with bolt and nut M4

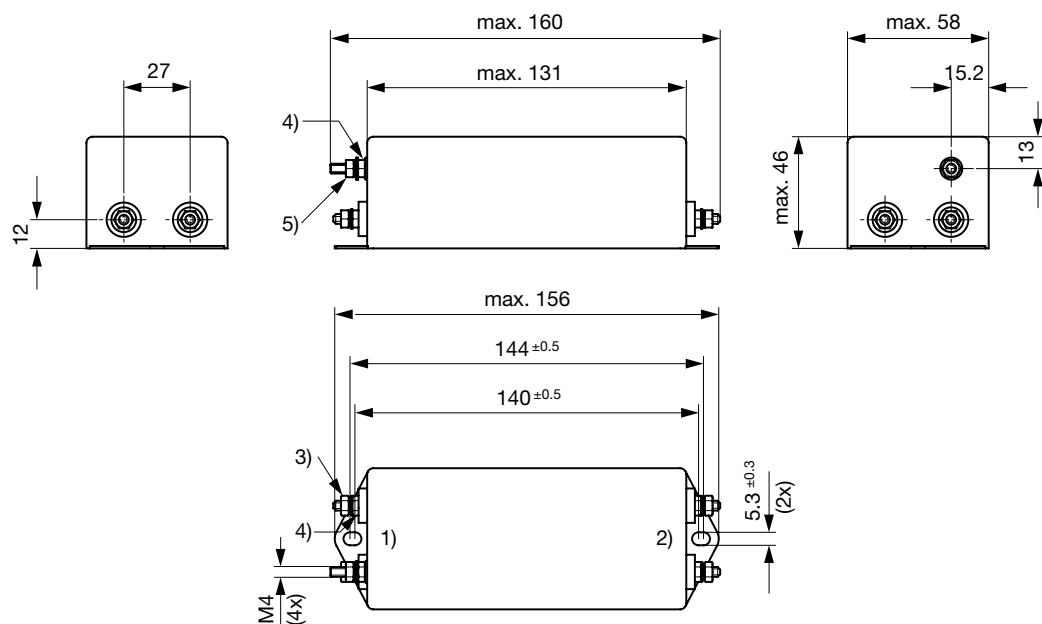


- 1) Line
- 2) Load
- 3) Nut torque 0.8...1 Nm, keep lock-nut fastened
- 4) Lock-nut do not unscrew
- 5) PE: M4x16, 1.2...1.5 Nm, keep lock-nut fastened

## Case MC with quick connect terminals

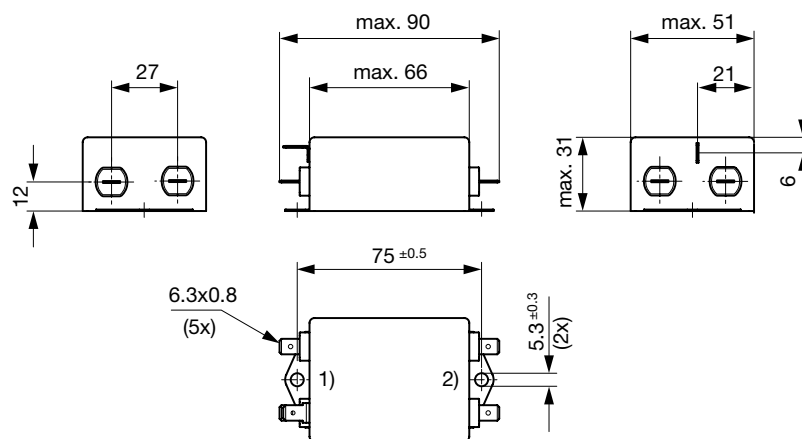


- 1) Line
- 2) Load

Case MD with quick connect terminals

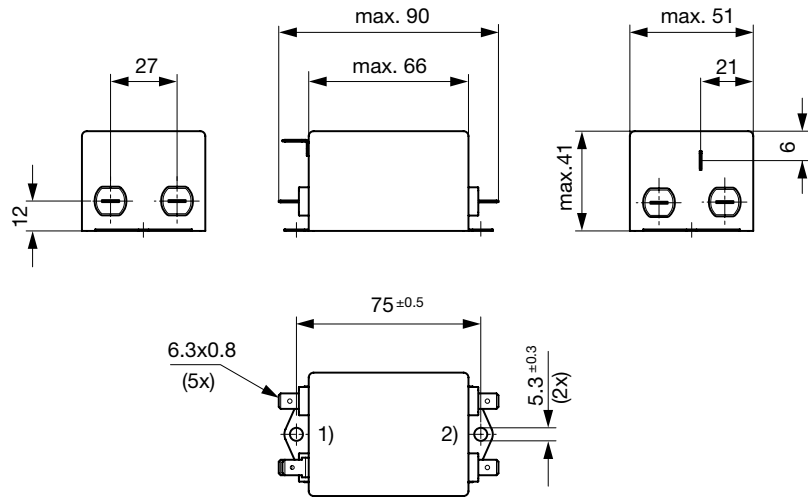


- 1) Line
- 2) Load

Case ME with quick connect terminals

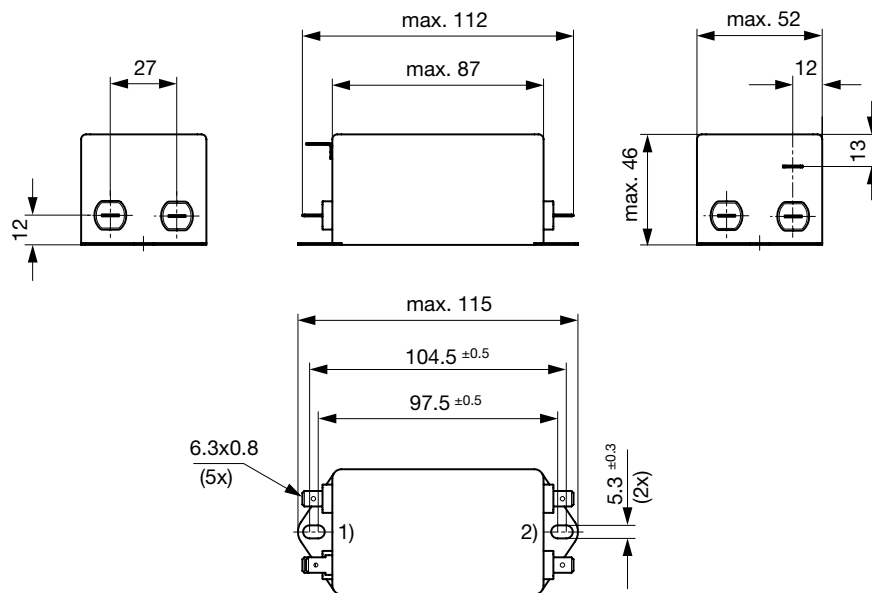


- 1) Line
- 2) Load

## Case MF with quick connect terminals

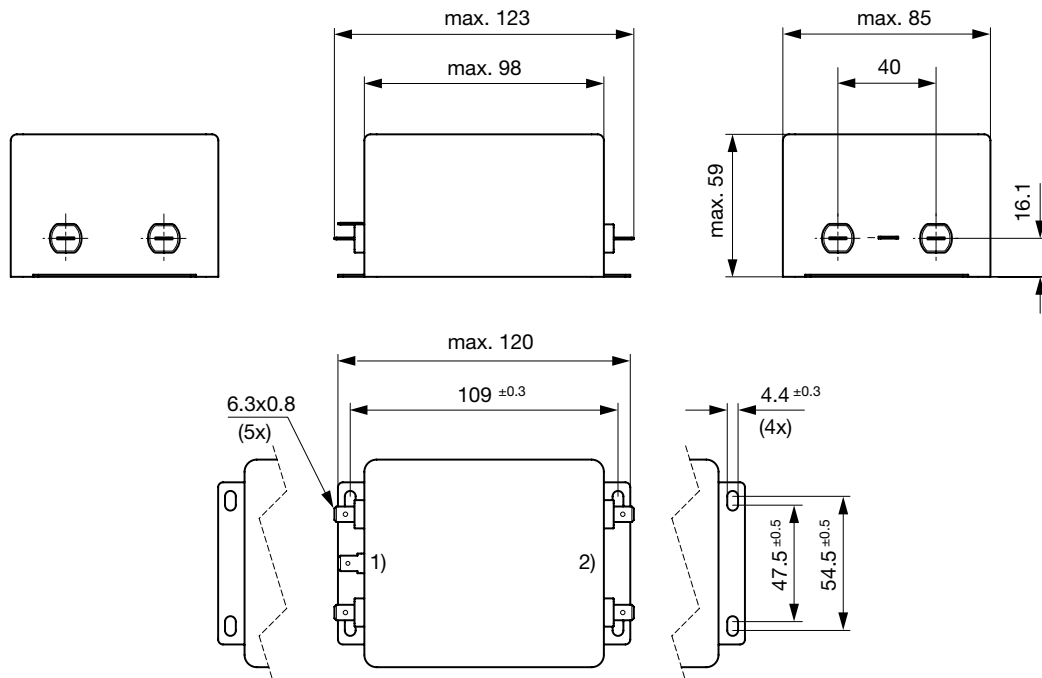


- 1) Line
- 2) Load

## Case MF with bolt and nut M4

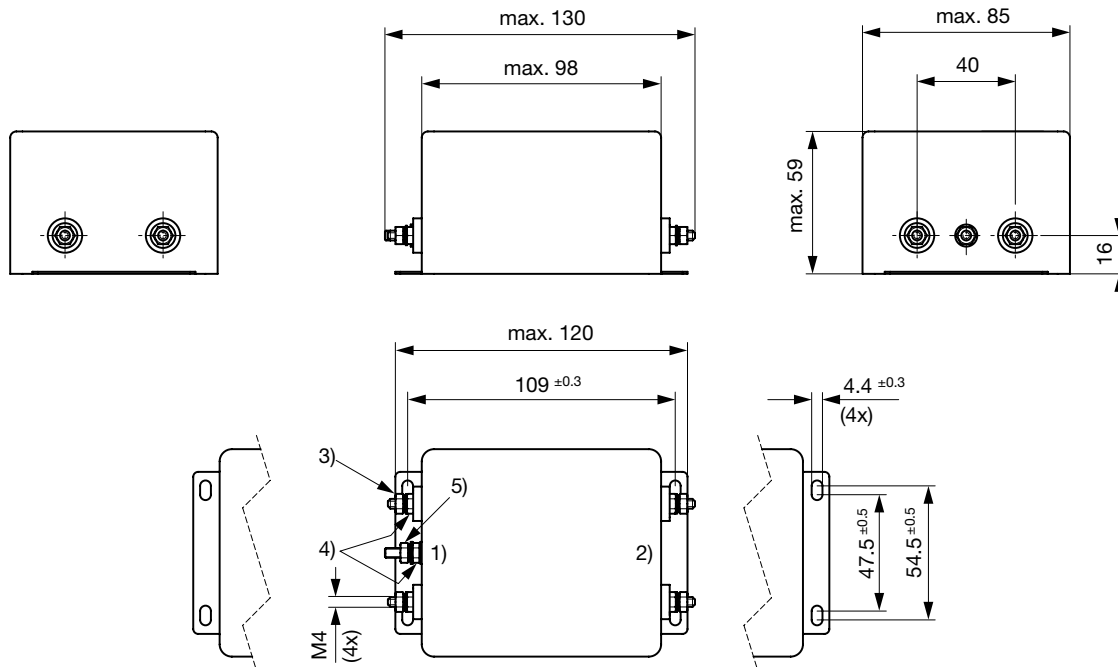

- 1) Line
- 2) Load
- 3) Nut torque 0.8...1 Nm, keep lock-nut fastened
- 4) Lock-nut do not unscrew
- 5) PE: M4x16, 1.2...1.5 Nm, keep lock-nut fastened


Case with wire leads

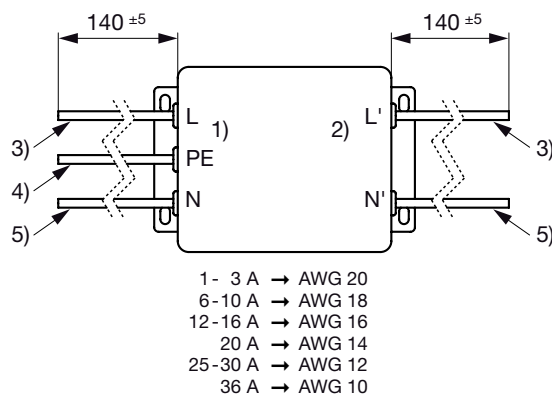

- 1) Line  
 2) Load  
 3) Brown  
 4) Yellow-Green  
 5) Blue


## Diagrams

Design C and D

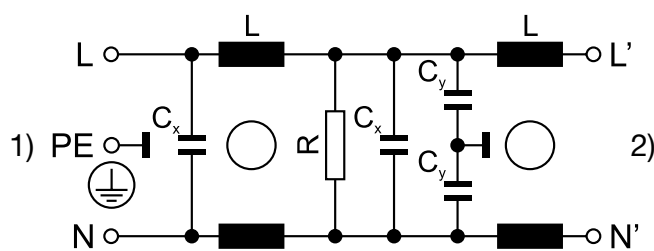


1) Line, 2) Load  
 Bleeding resistor  $R = 1 \text{ M}\Omega$   
 Medical (M5) without  $C_y$

Design F

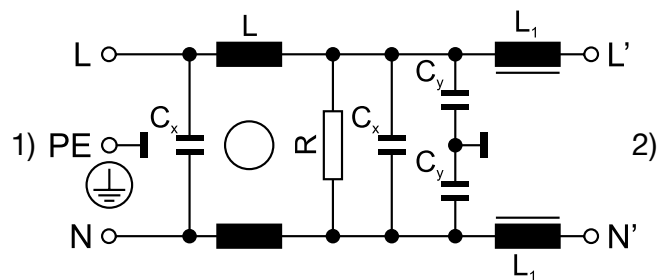


**Attenuation Loss** . . . 0.1/100Ω differential mode      ..... 100/0.1Ω differential mode      - - - 50Ω differential mode      \_\_\_\_ 50Ω common mode  
Standard version


1 A / Design C




3 A / Design C




6 A / Design C




10 A / Design C




12 A / Design C




16 A / Design C




20 A / Design C




30 A / Design C




1 A / Design D




3 A / Design D




6 A / Design D




10 A / Design D




12 A / Design D




16 A / Design D




25 A / Design D




36 A / Design D




1 A / Design F




3 A / Design F




6 A / Design F




10 A / Design F



12 A / Design F




16 A / Design F




Medical version (M5)


1 A / Design C




3 A / Design C




6 A / Design C




10 A / Design C




12 A / Design C




16 A / Design C




20 A / Design C




30 A / Design C




1 A / Design D




3 A / Design D




6 A / Design D




10 A / Design D




12 A / Design D




16 A / Design D




25 A / Design D




36 A / Design D




1 A / Design F




3 A / Design F




6 A / Design F




10 A / Design F



12 A / Design F




16 A / Design F




Medical version (M80)


1 A / Design C




3 A / Design C




6 A / Design C




10 A / Design C




12 A / Design C




16 A / Design C




20 A / Design C




30 A / Design C




1 A / Design D




3 A / Design D




6 A / Design D




10 A / Design D




12 A / Design D




16 A / Design D




25 A / Design D




36 A / Design D




1 A / Design F




3 A / Design F




6 A / Design F




10 A / Design F



12 A / Design F



16 A / Design F



## All Variants

| Rated current | Filter-Type   | Terminal                            | Design | L    | L1    | Cx   | Cy   | Ri   | Power Loss | Weight | Housings | Packaging | Order Number |
|---------------|---------------|-------------------------------------|--------|------|-------|------|------|------|------------|--------|----------|-----------|--------------|
| [A]           |               |                                     |        | [mH] | [mH]  | [μF] | [nF] | [mΩ] | [W]        | [g]    |          | [ST]      |              |
| 1             | Standard      | Quick connect terminal 6.3 x 0.8 mm | C      | 12   | -     | 0.22 | 4.7  | 945  | 1.9        | 125g   | 09       | 15        | 5500.2600.01 |
| 3             | Standard      | Quick connect terminal 6.3 x 0.8 mm | C      | 2.5  | -     | 0.22 | 4.7  | 120  | 2.2        | 130g   | 09       | 15        | 5500.2601.01 |
| 6             | Standard      | Quick connect terminal 6.3 x 0.8 mm | C      | 0.97 | -     | 0.22 | 4.7  | 26.2 | 1.9        | 130g   | 09       | 15        | 5500.2602.01 |
| 10            | Standard      | Quick connect terminal 6.3 x 0.8 mm | C      | 0.8  | -     | 0.47 | 4.7  | 12.9 | 2.6        | 200g   | MC       | 10        | 5500.2603.01 |
| 12            | Standard      | Quick connect terminal 6.3 x 0.8 mm | C      | 0.58 | -     | 0.47 | 4.7  | 10.1 | 2.9        | 200g   | MC       | 10        | 5500.2604.01 |
| 16            | Standard      | Quick connect terminal 6.3 x 0.8 mm | C      | 0.65 | -     | 0.33 | 4.7  | 8    | 4.1        | 265g   | MD       | 10        | 5500.2605.01 |
| 20            | Standard      | Quick connect terminal 6.3 x 0.8 mm | C      | 0.6  | -     | 1    | 4.7  | 4.6  | 3.7        | 390g   | ME       | 5         | 5500.2606.01 |
| 30            | Standard      | Bolt and nut M4                     | C      | 0.6  | -     | 1    | 10   | 2.5  | 4.5        | 855g   | MF       | 3         | 5500.2607.03 |
| 1             | Standard      | Quick connect terminal 6.3 x 0.8 mm | D      | 22   | -     | 0.33 | 4.7  | 1320 | 2.7        | 165g   | MC       | 10        | 5500.2610.01 |
| 3             | Standard      | Quick connect terminal 6.3 x 0.8 mm | D      | 9.8  | -     | 0.47 | 4.7  | 226  | 4.1        | 225g   | MD       | 10        | 5500.2611.01 |
| 6             | Standard      | Quick connect terminal 6.3 x 0.8 mm | D      | 7.8  | -     | 1    | 4.7  | 55.4 | 4          | 350g   | ME       | 5         | 5500.2612.01 |
| 10            | Standard      | Quick connect terminal 6.3 x 0.8 mm | D      | 4.5  | -     | 1    | 4.7  | 23.6 | 4.7        | 625g   | MB       | 4         | 5500.2613.01 |
| 12            | Standard      | Quick connect terminal 6.3 x 0.8 mm | D      | 3.25 | -     | 1    | 4.7  | 16   | 4.6        | 630g   | MB       | 4         | 5500.2614.01 |
| 16            | Standard      | Quick connect terminal 6.3 x 0.8 mm | D      | 2.8  | -     | 1    | 4.7  | 10.9 | 5.6        | 826g   | MF       | 3         | 5500.2615.01 |
| 25            | Standard      | Bolt and nut M4                     | D      | 2.0  | -     | 2.2  | 4.7  | 4.8  | 6          | 830g   | MB       | 4         | 5500.2616.03 |
| 36            | Standard      | Bolt and nut M4                     | D      | 1.23 | -     | 2.2  | 4.7  | 3.3  | 8.5        | 810g   | MB       | 4         | 5500.2617.03 |
| 1             | Standard      | Quick connect terminal 6.3 x 0.8 mm | F      | 22   | 0.49  | 0.33 | 4.7  | 1200 | 2.4        | 180g   | MC       | 10        | 5500.2620.01 |
| 3             | Standard      | Quick connect terminal 6.3 x 0.8 mm | F      | 9.8  | 0.16  | 0.47 | 4.7  | 194  | 3.5        | 240g   | MD       | 10        | 5500.2621.01 |
| 6             | Standard      | Quick connect terminal 6.3 x 0.8 mm | F      | 7.8  | 0.11  | 1    | 4.7  | 60   | 4.3        | 400g   | ME       | 5         | 5500.2622.01 |
| 10            | Standard      | Quick connect terminal 6.3 x 0.8 mm | F      | 4.5  | 0.06  | 1    | 4.7  | 21   | 4.2        | 645g   | MB       | 4         | 5500.2623.01 |
| 12            | Standard      | Quick connect terminal 6.3 x 0.8 mm | F      | 3.25 | 0.05  | 1    | 4.7  | 14.6 | 4.2        | 695g   | MB       | 4         | 5500.2624.01 |
| 16            | Standard      | Quick connect terminal 6.3 x 0.8 mm | F      | 2.8  | 0.043 | 1    | 4.7  | 13.7 | 7          | 950g   | MF       | 3         | 5500.2625.01 |
| 1             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | C      | 12   | -     | 0.22 | -    | 945  | 1.9        | 125g   | 09       | 15        | 5500.2600.04 |
| 3             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | C      | 2.5  | -     | 0.22 | -    | 120  | 2.2        | 130g   | 09       | 15        | 5500.2601.04 |
| 6             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | C      | 0.97 | -     | 0.22 | -    | 26.2 | 1.9        | 130g   | 09       | 15        | 5500.2602.04 |
| 10            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | C      | 0.8  | -     | 0.47 | -    | 12.9 | 2.6        | 200g   | MC       | 10        | 5500.2603.04 |
| 12            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | C      | 0.58 | -     | 0.47 | -    | 10.1 | 2.9        | 200g   | MC       | 10        | 5500.2604.04 |
| 16            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | C      | 0.65 | -     | 0.33 | -    | 8    | 4.1        | 265g   | MD       | 10        | 5500.2605.04 |
| 20            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | C      | 0.6  | -     | 1    | -    | 4.6  | 3.7        | 390g   | ME       | 5         | 5500.2606.04 |
| 30            | Medical (M5)  | Bolt and nut M4                     | C      | 0.6  | -     | 1    | -    | 2.5  | 4.5        | 855g   | MF       | 3         | 5500.2607.06 |
| 1             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | D      | 22   | -     | 0.33 | -    | 1320 | 2.7        | 165g   | MC       | 10        | 5500.2610.04 |
| 3             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | D      | 9.8  | -     | 0.47 | -    | 226  | 4.1        | 225g   | MD       | 10        | 5500.2611.04 |
| 6             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | D      | 7.8  | -     | 1    | -    | 55.4 | 4          | 350g   | ME       | 5         | 5500.2612.04 |
| 10            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | D      | 4.5  | -     | 1    | -    | 23.6 | 4.7        | 625g   | MB       | 4         | 5500.2613.04 |
| 12            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | D      | 3.25 | -     | 1    | -    | 16   | 4.6        | 630g   | MB       | 4         | 5500.2614.04 |
| 16            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | D      | 2.8  | -     | 1    | -    | 10.9 | 5.6        | 826g   | MF       | 3         | 5500.2615.04 |
| 25            | Medical (M5)  | Bolt and nut M4                     | D      | 2.0  | -     | 2.2  | -    | 4.8  | 6          | 830g   | MB       | 4         | 5500.2616.06 |
| 36            | Medical (M5)  | Bolt and nut M4                     | D      | 1.23 | -     | 2.2  | -    | 3.3  | 8.5        | 810g   | MB       | 4         | 5500.2617.06 |
| 1             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | F      | 22   | 0.49  | 0.33 | -    | 1200 | 2.4        | 180g   | MC       | 10        | 5500.2620.04 |
| 3             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | F      | 9.8  | 0.16  | 0.47 | -    | 194  | 3.5        | 240g   | MD       | 10        | 5500.2621.04 |
| 6             | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | F      | 7.8  | 0.11  | 1    | -    | 60   | 4.3        | 400g   | ME       | 5         | 5500.2622.04 |
| 10            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | F      | 4.5  | 0.06  | 1    | -    | 21   | 4.2        | 645g   | MB       | 4         | 5500.2623.04 |
| 12            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | F      | 3.25 | 0.05  | 1    | -    | 14.6 | 4.2        | 695g   | MB       | 4         | 5500.2624.04 |
| 16            | Medical (M5)  | Quick connect terminal 6.3 x 0.8 mm | F      | 2.8  | 0.043 | 1    | -    | 13.7 | 7          | 950g   | MF       | 3         | 5500.2625.04 |
| 1             | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | C      | 12   | -     | 0.22 | 0.47 | 945  | 1.9        | 125g   | 09       | 15        | 5500.2600.07 |
| 3             | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | C      | 2.5  | -     | 0.22 | 0.47 | 120  | 2.2        | 130g   | 09       | 15        | 5500.2601.07 |
| 6             | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | C      | 0.97 | -     | 0.22 | 0.47 | 26.2 | 1.9        | 130g   | 09       | 15        | 5500.2602.07 |
| 10            | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | C      | 0.8  | -     | 0.47 | 0.47 | 12.9 | 2.6        | 200g   | MC       | 10        | 5500.2603.07 |
| 12            | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | C      | 0.58 | -     | 0.47 | 0.47 | 10.1 | 2.9        | 200g   | MC       | 10        | 5500.2604.07 |
| 16            | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | C      | 0.65 | -     | 0.33 | 0.47 | 8    | 4.1        | 265g   | MD       | 10        | 5500.2605.07 |
| 20            | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | C      | 0.6  | -     | 1    | 0.47 | 4.6  | 3.7        | 390g   | ME       | 5         | 5500.2606.07 |
| 30            | Medical (M80) | Bolt and nut M4                     | C      | 0.6  | -     | 1    | 0.47 | 2.5  | 4.5        | 855g   | MF       | 3         | 5500.2607.09 |
| 1             | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | D      | 22   | -     | 0.33 | 0.47 | 1320 | 2.7        | 165g   | MC       | 10        | 5500.2610.07 |

| Rated<br>current | Filter-Type   | Terminal                            | Design | L    | L1    | Cx   | Cy   | Ri   | Power<br>Loss | Weight | Housings | Packa-<br>ging | Order Number                 |
|------------------|---------------|-------------------------------------|--------|------|-------|------|------|------|---------------|--------|----------|----------------|------------------------------|
| [A]              |               |                                     |        | [mH] | [mH]  | [µF] | [nF] | [mΩ] | [W]           | [g]    |          | [ST]           |                              |
| 3                | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | D      | 9.8  | -     | 0.47 | 0.47 | 226  | 4.1           | 225 g  | MD       | 10             | <a href="#">5500.2611.07</a> |
| 6                | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | D      | 7.8  | -     | 1    | 0.47 | 55.4 | 4             | 350 g  | ME       | 5              | <a href="#">5500.2612.07</a> |
| 10               | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | D      | 4.5  | -     | 1    | 0.47 | 23.6 | 4.7           | 625 g  | MB       | 4              | <a href="#">5500.2613.07</a> |
| 12               | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | D      | 3.25 | -     | 1    | 0.47 | 16   | 4.6           | 630 g  | MB       | 4              | <a href="#">5500.2614.07</a> |
| 16               | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | D      | 2.8  | -     | 1    | 0.47 | 10.9 | 5.6           | 826 g  | MF       | 3              | <a href="#">5500.2615.07</a> |
| 25               | Medical (M80) | Bolt and nut M4                     | D      | 2.0  | -     | 2.2  | 0.47 | 4.8  | 6             | 830 g  | MB       | 4              | <a href="#">5500.2616.09</a> |
| 36               | Medical (M80) | Bolt and nut M4                     | D      | 1.23 | -     | 2.2  | 0.47 | 3.3  | 8.5           | 810 g  | MB       | 4              | <a href="#">5500.2617.09</a> |
| 1                | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | F      | 22   | 0.49  | 0.33 | 0.47 | 1200 | 2.4           | 180 g  | MC       | 10             | <a href="#">5500.2620.07</a> |
| 3                | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | F      | 9.8  | 0.16  | 0.47 | 0.47 | 194  | 3.5           | 240 g  | MD       | 10             | <a href="#">5500.2621.07</a> |
| 6                | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | F      | 7.8  | 0.11  | 1    | 0.47 | 60   | 4.3           | 400 g  | ME       | 5              | <a href="#">5500.2622.07</a> |
| 10               | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | F      | 4.5  | 0.06  | 1    | 0.47 | 21   | 4.2           | 645 g  | MB       | 4              | <a href="#">5500.2623.07</a> |
| 12               | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | F      | 3.25 | 0.05  | 1    | 0.47 | 14.6 | 4.2           | 695 g  | MB       | 4              | <a href="#">5500.2624.07</a> |
| 16               | Medical (M80) | Quick connect terminal 6.3 x 0.8 mm | F      | 2.8  | 0.043 | 1    | 0.47 | 13.7 | 7             | 950 g  | MF       | 3              | <a href="#">5500.2625.07</a> |

 Most Popular.

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- Design
- C) high symmetrical and asymmetrical noise attenuation
  - D) Excellent high frequency noise attenuation
  - F) Excellent low frequency noise attenuation

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Schurter:

[5500.2601.01](#) [5500.2605.01](#) [5500.2611.01](#) [5500.2602.01](#) [5500.2606.01](#) [5500.2612.01](#) [5500.2621.01](#)  
[5500.2625.01](#) [5500.2622.01](#) [5500.2603.01](#) [5500.2600.01](#) [5500.2604.01](#) [5500.2607.03](#) [5500.2610.01](#) [5500.2613.01](#)  
[5500.2614.01](#) [5500.2604.04](#) [5500.2615.01](#) [5500.2616.03](#) [5500.2617.03](#) [5500.2620.01](#) [5500.2623.01](#)  
[5500.2624.01](#)