



DIMENSIONS

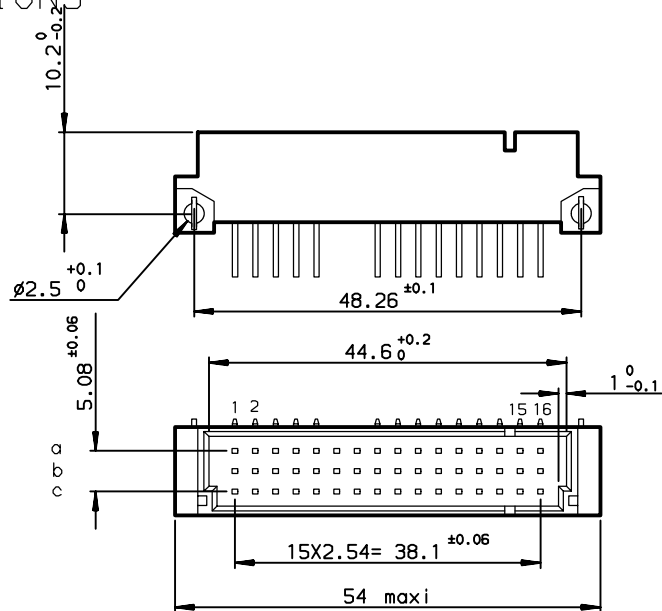

TIN LEAD PART NUMBER

PART NUMBER


86093427313H50781E1

LEAD FREE PART NUMBER

PART NUMBER

86093427313H50BSLF


TERMINATION

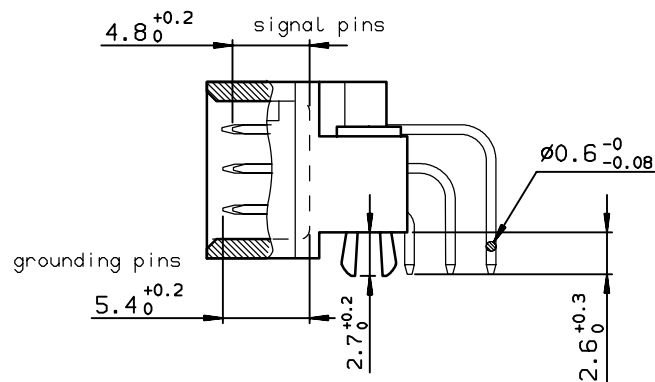

SPECIFICATION 781 = no contact in position : row:a-b-c cavities 6-7
or SPECIFICATION BS = + grounding pins in a15-b15-c15

PCB DRILLING

component side

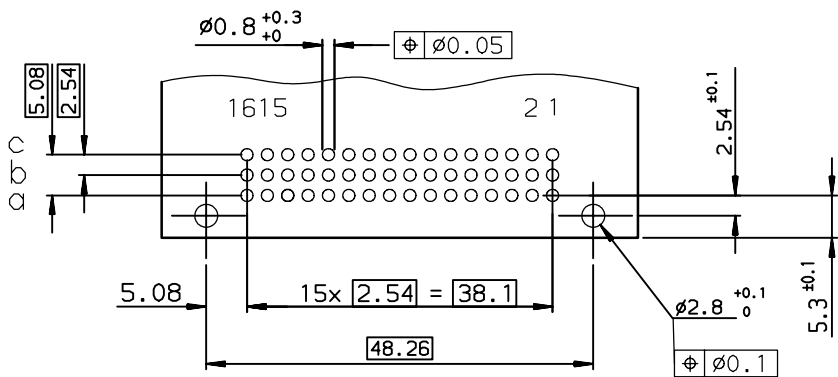

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	ROUILLARD	1998/03/06	ANGULAR	0.X	±0.1
Eng	TARON	1998/03/06	LINEAR	0.XX	±0.1
Chr	LEGARE	1998/03/06	0.XX' ±2'	0.XXX	±0.1
Appr	LEGARE	1998/03/06	Product family	DIN 8609	Spec ref -
FCI		STANDARD MALE 3 ROW		42 CONTACTS	
title		42 CONTACTS		catLog no	
C-8609-0694		C-8609-0694		Rev.	E
CUSTOMER		sheet 1 of 1			

rev	ecn no	dr	date
C	-	ROU	1999/12/10
D	LS05-001	JTA	2005/03/01
E	LS06-0095	LGO	2006/06/24
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)
[86093427313H50BSLF](#)