
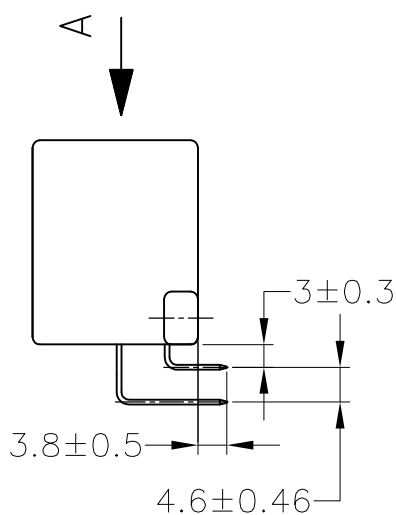
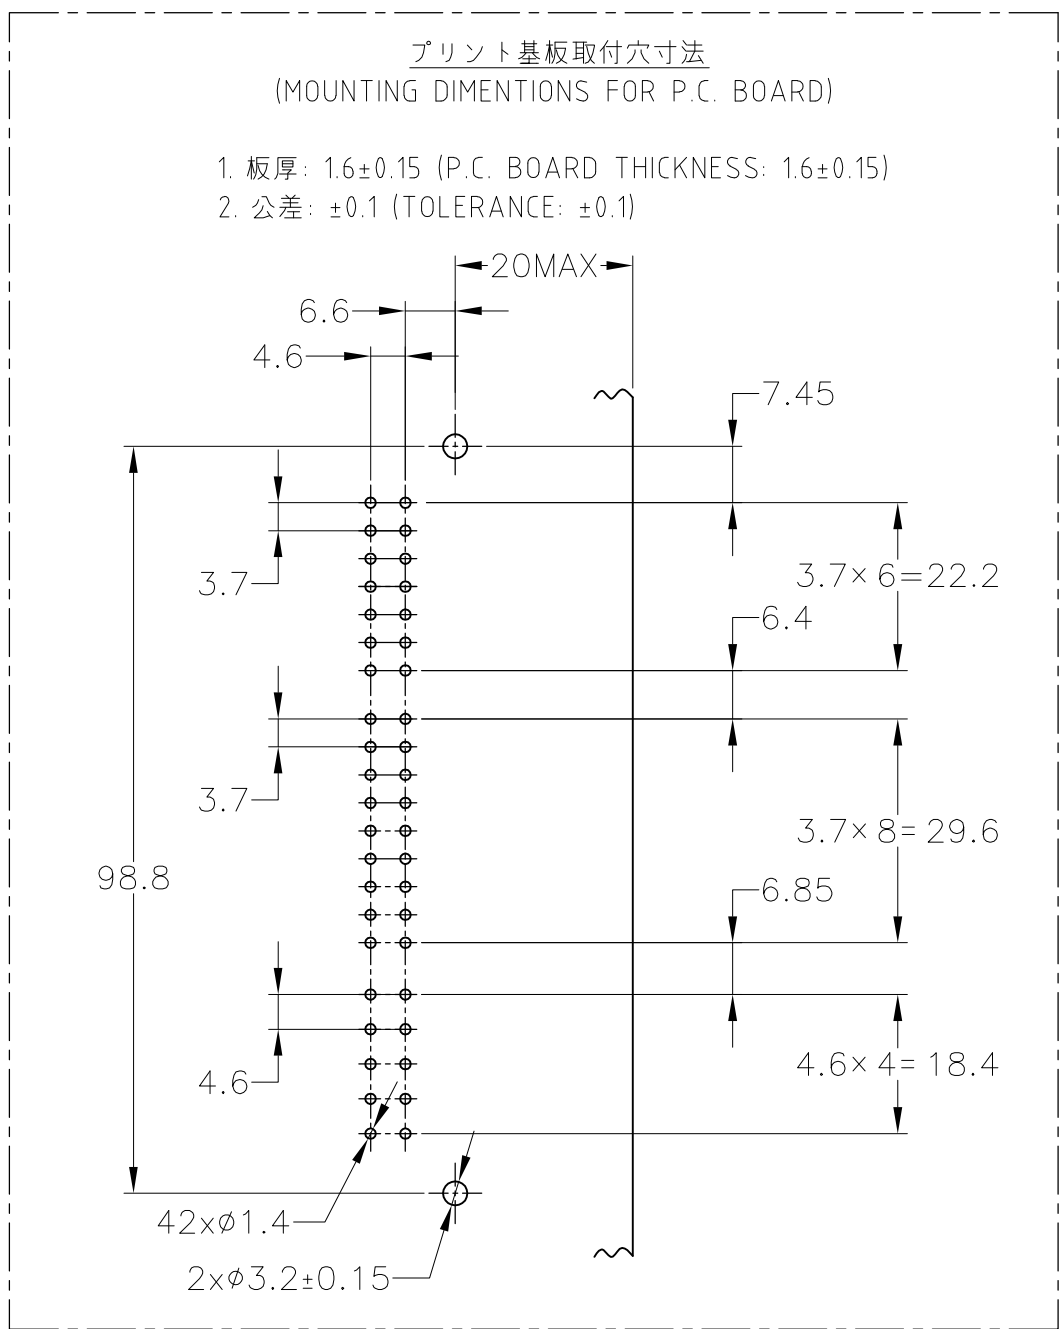


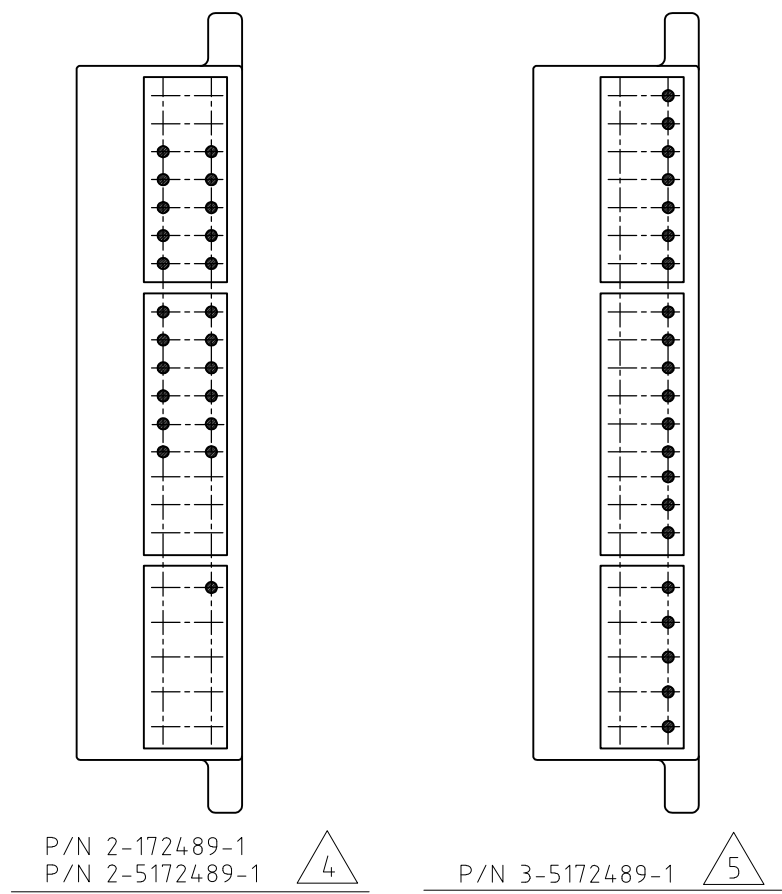

1. 嵌合する相手ハウジング型番：
10極:172315
14極:172354
18極:172316
2. 

A

 面より2mmの範囲で測定のこと
3. プリント基板への取付はM3のタップ・ピンネジ(JIS B1115 1種)で締付けた後、はんだ付けをする

OBSOLETE	SELECTIVE TIN (MATTE)	SELECTIVE GOLD × 23	PBT G.F.	NATURAL 自然色	 2-5172489-1
		PRE-TIN × 19			
	SELECTIVE TIN (MATTE)	SELECTIVE GOLD × 21	PBT G.F.	NATURAL 自然色	 3-5172489-1
		PRE-TIN × 21			
	SELECTIVE TIN (MATTE)	SELECTIVE GOLD × 42	PBT G.F.	YELLOW 黄色	1-5172489-7
	SELECTIVE TIN (MATTE)	SELECTIVE GOLD × 42	PBT G.F.	GRAY 灰色	1-5172489-6
	TIN-LEAD	SELECTIVE GOLD × 21	PBT G.F.	NATURAL 自然色	 3-172489-1
		PRE-TIN × 21			
	TIN-LEAD	SELECTIVE GOLD × 23	PBT G.F.	NATURAL 自然色	 2-172489-1
		PRE-TIN × 19			
TIN-LEAD	SELECTIVE GOLD × 42	PBT G.F.	YELLOW 黄色	1-172489-7	
TIN-LEAD	SELECTIVE GOLD × 42	PBT G.F.	GRAY 灰色	1-172489-6	
OBSOLETE	PRE-TIN × 42		PBT G.F.	YELLOW 黄色	172489-7
	PRE-TIN × 42		PBT G.F.	GRAY 灰色	172489-6
	SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部側	MATERIAL 材料	COLOR 色	PART NUMBER 製品型番
CONTACT FINISH コンタクト仕上					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.FUJITA		17JUL08		 TE Connectivity			
		CHK T.SHINOHARA		22JUL08					
DIMENSIONS: 單位: 耗 mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI		NAME 名称		42POSITION CAP HOUSING ASSY PULSE LOCK CONNECTOR	
		0 PLC —		PRODUCT SPEC 製品規格					
		1 PLC ± —		—					
		2 PLC ± —		APPLICATION SPEC 取付適用規格		SIZE		CAGE CODE	
		3 PLC ± —		—					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		4 PLC ± —		WEIGHT		DRAWING NO 番号		RESTRICTED TO	
		ANGLES ± —		54.4 g		A2 00779		C=172489	
MATERIAL 材料		FINISH 仕上		CUSTOMER DRAWING		SCALE 尺度		SHEET	
TAB CONTACT:BRASS HOUSING:PBT		SEE TABLE				1:1		1 of 1	
10± : ±0.2 30± : ±0.25 100± : ±0.3 ANGLE: 3°								REV D4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[172489-7](#)