


Base strip - ST 4-PCBV/ 4-G-6,2 - 1980721

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

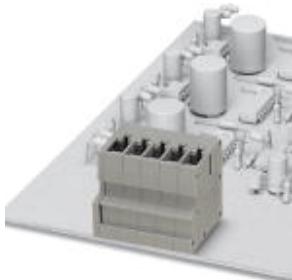

ST-COMBI receptacle, plug-in direction vertical to the PCB, pitch: 6.2 mm, no. of positions: 4

The illustration shows the 5-pos.
version

Product Features

- Universal plug-in solutions from the DIN rail through to the device can be implemented with the same plug
- The pitch width of this base strip is matched to that of the COMBI plug



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
Weight per Piece (excluding packing)	15.0 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Pitch	6.20 mm
Width	24.8 mm
Pin dimensions	1.2 x 1.3
Hole diameter	2.00 mm

General

Insulating material group	I
Maximum load current	32 A (with 6 mm ² conductor cross section)
Insulating material	PA
Flammability rating according to UL 94	V0
Internal cylindrical gage	A4

Base strip - ST 4-PCBV/ 4-G-6,2 - 1980721

Technical data

General

Number of positions	4
---------------------	---

Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Base strip - ST 4-PCBV/ 4-G-6,2 - 1980721

Approvals

Ex Approvals

Approvals submitted

Approval details

UL Recognized 		
	B	C
Nominal current IN	20 A	20 A
Nominal voltage UN	600 V	600 V

cUL Recognized 		
	B	C
Nominal current IN	20 A	20 A
Nominal voltage UN	600 V	600 V


EAC
EAC

cULus Recognized 		
--	--	--

Drawings

Base strip - ST 4-PCBV/ 4-G-6,2 - 1980721

Dimensional drawing

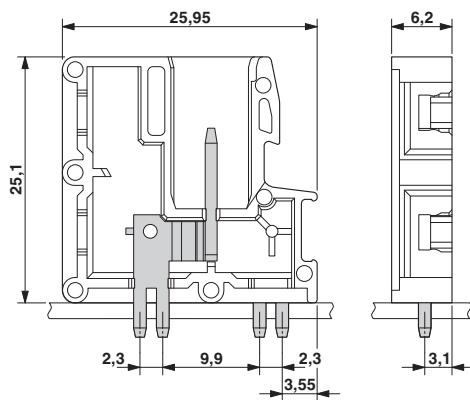

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1980721](#)