



REV.	DATE	DESCRIPTION
NC	05/24/04	INITIAL RELEASE




STRIPPING DIMENSIONS

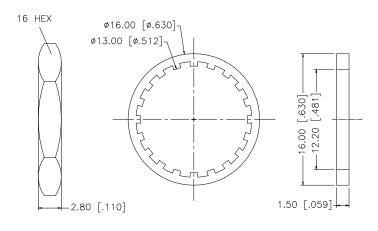







## NOTE:

- 1. CRIMPED FERRULE HEX CRIMP SIZE .213"
- 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

					UN
8					INC
7	FERRULE	COPPER	NICKEL	1	
6	HEX NUT	BRASS	NICKEL	1	
5	LOCK WASHER	BRASS	NICKEL	1	
4	GASKET	RUBBER	RED	1	
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY/HOUSING	BRASS	NICKEL	1	1.
	DESCRIPTION	MATERIAL	FINISH	QTY	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REPERÂNCE OULT.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm ± 0.20mm

8 - 30mm ± 0.40mm

30 - 120mm ± 0.40mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"

APPROVALS	DATE		
DRAWN G.R.S.	05/24/04		
CHECKED			
ISSUED			
SHEET 1 OF 1			
C:/112/112505.DWG			

## **Amphenol Connex**

PART DESCRIPTION

BNC BULKHEAD CRIMP JACK (FOR RG-55/U, 142A/U, 223/U, 400/U CABLE)

\	, ,	, ,	, ,	,	,
PART NO.					
		112505			
DWG. NO.	112505.DWG		REV. NC	SIZE A	SCALE N

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Amphenol}}{\frac{112505}{}}$