

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0438100331

Status:

Active

Overview:


Mini-Fit BMI Connectors

Description:

Mini-Fit BMI Header, Dual Row, Right-Angle, for 3.18mm PCB, 4 Circuits, Tin (Sn) Plating, 260C Wave Solderable, without Retention Clip

Documents:	
3D Model	Product Specification PS-45750-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-43810-001-000 (PDF)
Product Specification PS-43810-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	43810
Application	Board-to-Board, Power, Wire-to-Board
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.
Overview	Mini-Fit BMI Connectors
Product Name	Mini-Fit BMI
UPC	800753307872
Physical	
Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	No
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.275/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	4.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	3.17mm
Packaging Type	Tray
Pitch - Mating Interface	4.20mm
Pitch - Termination Interface	4.20mm
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes

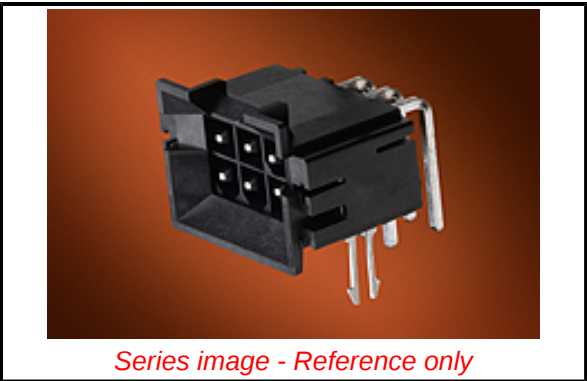

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/61/2018 (27 June 2018)	
Halogen-Free Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
43810 Series
Mates With
42385 , 42474 , 44475 , 44516 , 5557 Dual Row, 245135 Mini-Fit Jr. Cable Assembly

Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	13.0A
Voltage - Maximum	600V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	240
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-43810-001-000
Product Specification	PS-43810-001-001, PS-45750-001-001
Sales Drawing	SD-43810-051-000

This document was generated on 10/22/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[43810-0331](#)