


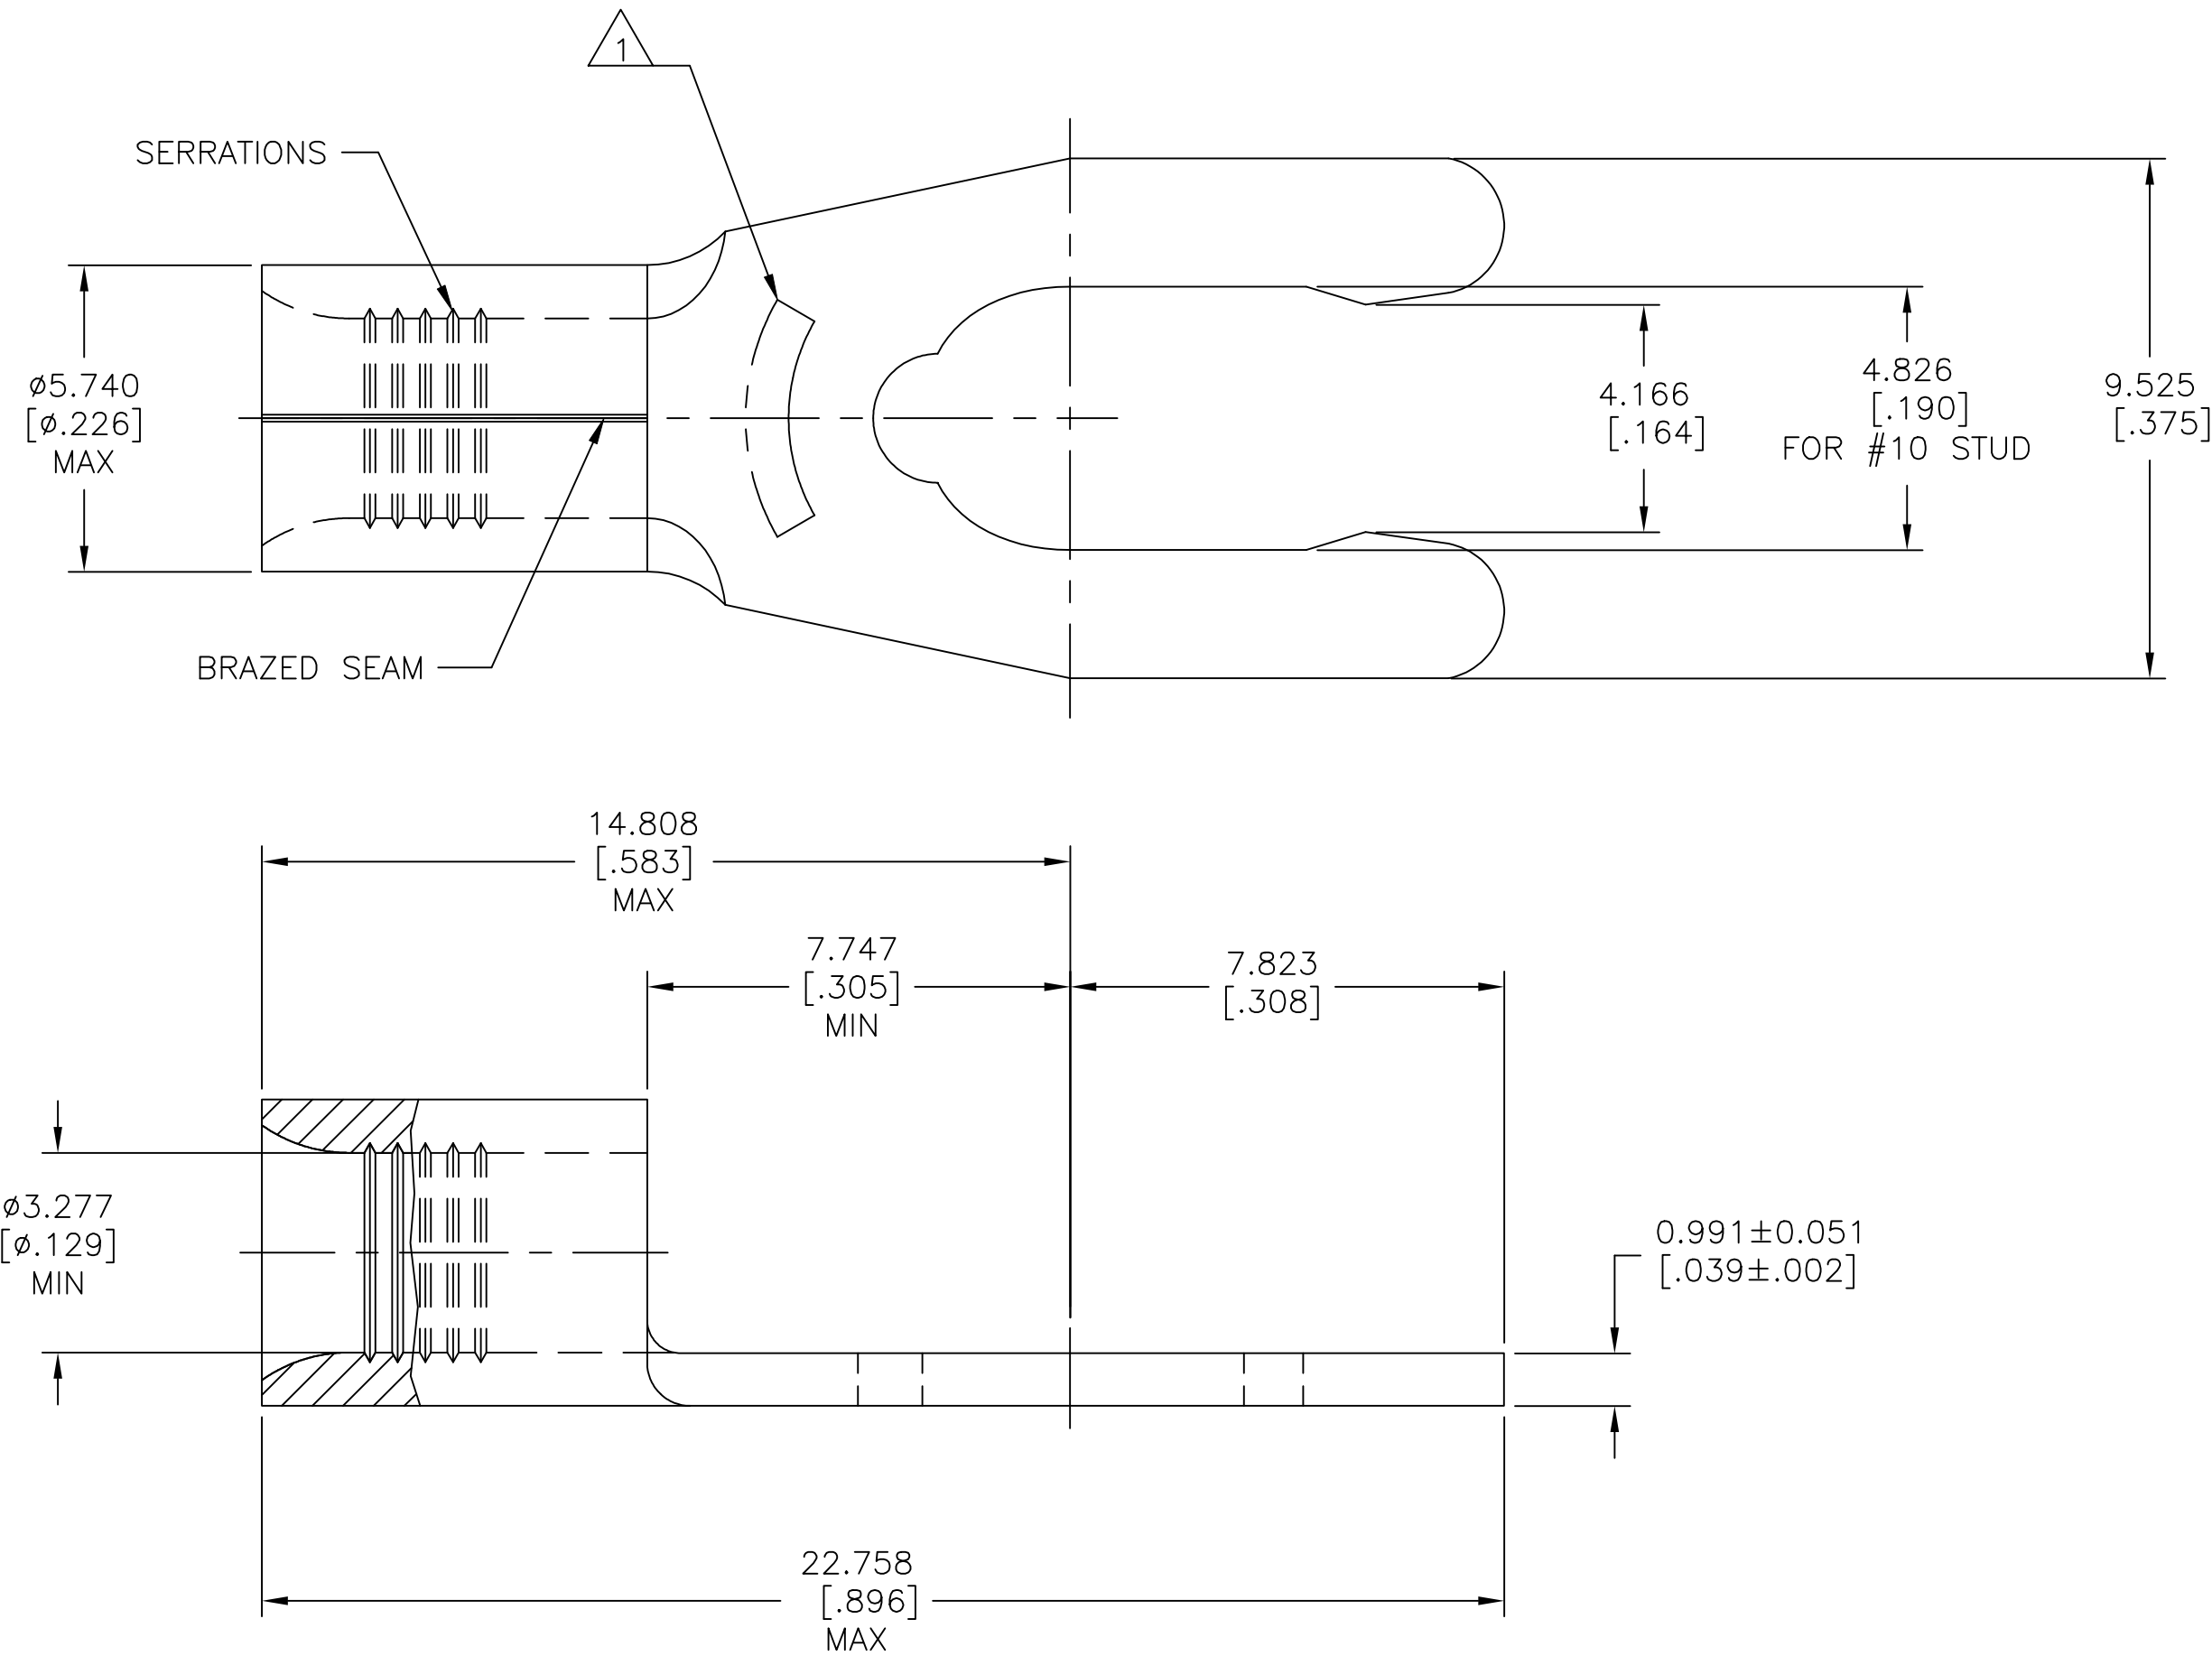


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REV & REDRAWN PER 0720-0040-93	3-29-93	TAB	DAP
	F1	REVISED PER ECO-17-008808	05MAR2018	RS	DR



AMP WIRE RANGE	 E13288 Listed
12-10 AWG SOLID OR STRANDED	12-10 AWG STRANDED

 LR7189 Certified	MILITARY P/N AND CLASS
12-10 AWG SOLID OR STRANDED	NOT APPLICABLE

 STAMP 10S AMP 12-10* APPROX AS SHOWN
10S INDICATES STUD SIZE



500	LOOSE PIECE	52717-1
QUANTITY	PACKAGING TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.		<div>DWN TA BRINKMAN 3-29-93</div> <div>CHK DA PATTERSON 3-29-93</div> <div>APVD DE MILLER 3-29-93</div>		<div> TE Connectivity Ltd.</div>						
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER	1-800-522-6752	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± - FINISH	PRODUCT SPEC	NAME TERMINAL, LONG SPRING SPADE, SOLISTRAND™ 12-10 AWG						
	FOR APPLICATION	TOOLING ASSISTANCE CENTER	1-800-722-1111			VOLTAGE RATING: NOT APPLICABLE					APPLICATION SPEC	SIZE	CAGE CODE
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE, 2.62-6.64mm²[5,180-13,100] CIR MILS SOLID OR STRANDED	MATERIAL PHOSPHOR BRONZE PER ASTM B-103 ANNEALED	TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545		WEIGHT	A200779C=52717			—			
						CUSTOMER DRAWING		SCALE	8:1	SHEET	1 of 1	REV	F1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[52717-2](#)