


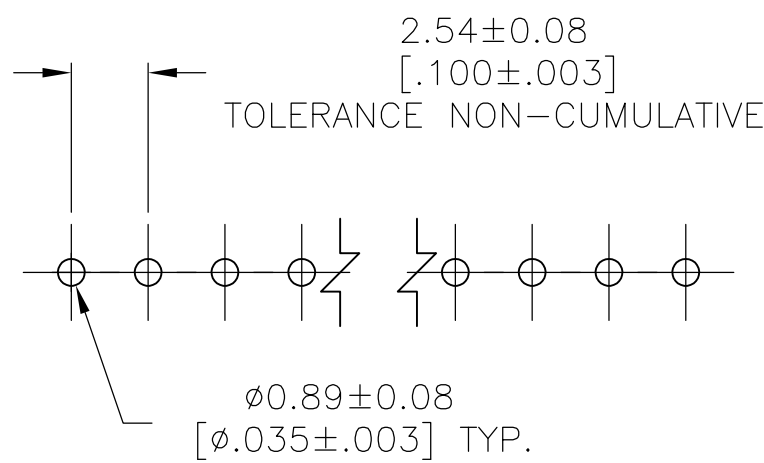

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
5. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

$\triangle$ 6	98.65 [3.884]	96.52 [3.800]	39	40	9-146461-0
$\triangle$ 6	101.19 [3.984]	99.06 [3.900]	38	39	8-146461-9
$\triangle$ 6	96.11 [3.784]	93.98 [3.700]	37	38	8-146461-8
$\triangle$ 6	93.57 [3.684]	91.44 [3.600]	36	37	8-146461-7
$\triangle$ 6	91.03 [3.584]	88.90 [3.500]	35	36	8-146461-6
$\triangle$ 6	88.49 [3.484]	86.36 [3.400]	34	35	8-146461-5
$\triangle$ 6	85.95 [3.384]	83.82 [3.300]	33	34	8-146461-4
$\triangle$ 6	83.41 [3.284]	81.28 [3.200]	32	33	8-146461-3
$\triangle$ 6	80.87 [3.184]	78.74 [3.100]	31	32	8-146461-2
$\triangle$ 6	78.33 [3.084]	76.20 [3.000]	30	31	8-146461-1
$\triangle$ 6	75.79 [2.984]	73.66 [2.900]	29	30	8-146461-0
$\triangle$ 6	73.25 [2.884]	71.12 [2.800]	28	29	7-146461-9
$\triangle$ 6	70.71 [2.784]	68.58 [2.700]	27	28	7-146461-8
$\triangle$ 6	68.17 [2.684]	66.04 [2.600]	26	27	7-146461-7
$\triangle$ 6	65.63 [2.584]	63.50 [2.500]	25	26	7-146461-6
$\triangle$ 6	63.09 [2.484]	60.96 [2.400]	24	25	7-146461-5
$\triangle$ 6	60.55 [2.384]	58.42 [2.300]	23	24	7-146461-4
$\triangle$ 6	58.01 [2.284]	55.88 [2.200]	22	23	7-146461-3
$\triangle$ 6	55.47 [2.184]	53.34 [2.100]	21	22	7-146461-2
$\triangle$ 6	52.93 [2.084]	50.80 [2.000]	20	21	7-146461-1
$\triangle$ 6	50.39 [1.984]	48.26 [1.900]	19	20	7-146461-0
$\triangle$ 6	47.85 [1.884]	45.72 [1.800]	18	19	6-146461-9
$\triangle$ 6	45.31 [1.784]	43.18 [1.700]	17	18	6-146461-8
$\triangle$ 6	42.77 [1.684]	40.64 [1.600]	16	17	6-146461-7
$\triangle$ 6	40.23 [1.584]	38.10 [1.500]	15	16	6-146461-6
$\triangle$ 6	37.69 [1.484]	35.56 [1.400]	14	15	6-146461-5
$\triangle$ 6	35.15 [1.384]	33.02 [1.300]	13	14	6-146461-4
$\triangle$ 6	32.61 [1.284]	30.48 [1.200]	12	13	6-146461-3
$\triangle$ 6	30.07 [1.184]	27.94 [1.100]	11	12	6-146461-2
$\triangle$ 6	27.53 [1.084]	25.40 [1.000]	10	11	6-146461-1
$\triangle$ 6	24.99 [.984]	22.86 [.900]	9	10	6-146461-0
$\triangle$ 6	22.45 [.884]	20.32 [.800]	8	9	5-146461-9
$\triangle$ 6	19.91 [.784]	17.78 [.700]	7	8	5-146461-8
$\triangle$ 6	17.37 [.684]	15.24 [.600]	6	7	5-146461-7
$\triangle$ 6	14.83 [.584]	12.70 [.500]	5	6	5-146461-6
$\triangle$ 6	12.29 [.484]	10.16 [.400]	4	5	5-146461-5
$\triangle$ 6	9.75 [.384]	7.62 [.300]	3	4	5-146461-4
$\triangle$ 6	7.21 [.284]	5.08 [.200]	2	3	5-146461-3
$\triangle$ 6	4.67 [.184]	2.54 [.100]	1	2	5-146461-2
$\triangle$ 6	2.13 [.084]	-	-	1	5-146461-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	98.65 [3.884]	96.52 [3.800]	39	40	4-146461-0
5	101.19 [3.984]	99.06 [3.900]	38	39	3-146461-9
5	96.11 [3.784]	93.98 [3.700]	37	38	3-146461-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146461-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146461-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146461-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146461-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146461-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146461-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146461-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146461-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146461-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146461-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146461-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146461-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146461-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146461-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146461-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146461-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146461-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146461-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146461-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146461-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146461-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146461-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146461-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146461-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146461-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146461-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146461-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146461-0
5	22.45 [.884]	20.32 [.800]	8	9	146461-9
5	19.91 [.784]	17.78 [.700]	7	8	146461-8
5	17.37 [.684]	15.24 [.600]	6	7	146461-7
5	14.83 [.584]	12.70 [.500]	5	6	146461-6
5	12.29 [.484]	10.16 [.400]	4	5	146461-5
5	9.75 [.384]	7.62 [.300]	3	4	146461-4
5	7.21 [.284]	5.08 [.200]	2	3	146461-3
5	4.67 [.184]	2.54 [.100]	1	2	146461-2
5	2.13 [.084]	-	-	1	146461-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	1/17/96		 TE Connectivity
		DRAWN BY	J. HOFFMAN		
		CHECKED BY	G. DUBNICZKI		
		APPROVED BY	G. DUBNICZKI		
		DATE	3/18/96		
DIMENSIONS: mm [INCHES]		TO FRANCES UNLESS OTHERWISE SPECIFIED:		NAME HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
		PRODUCT SPEC		SIZE A1	
MATERIAL 		APPLICATION SPEC		CAGE CODE 00779	
FINISH SEE TABLE		WEIGHT —		DRAWING NO. 146461	
		CUSTOMER DRAWING		RESTRICTED TO —	
		SCALE 4:1		SHEET 1 OF 1	
		REV B			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-146461-0](#)