





1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [0.000100-0.000200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [0.000050] NICKEL ENTIRE POST.
6. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [0.000100-0.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [0.000050] NICKEL ENTIRE POST.

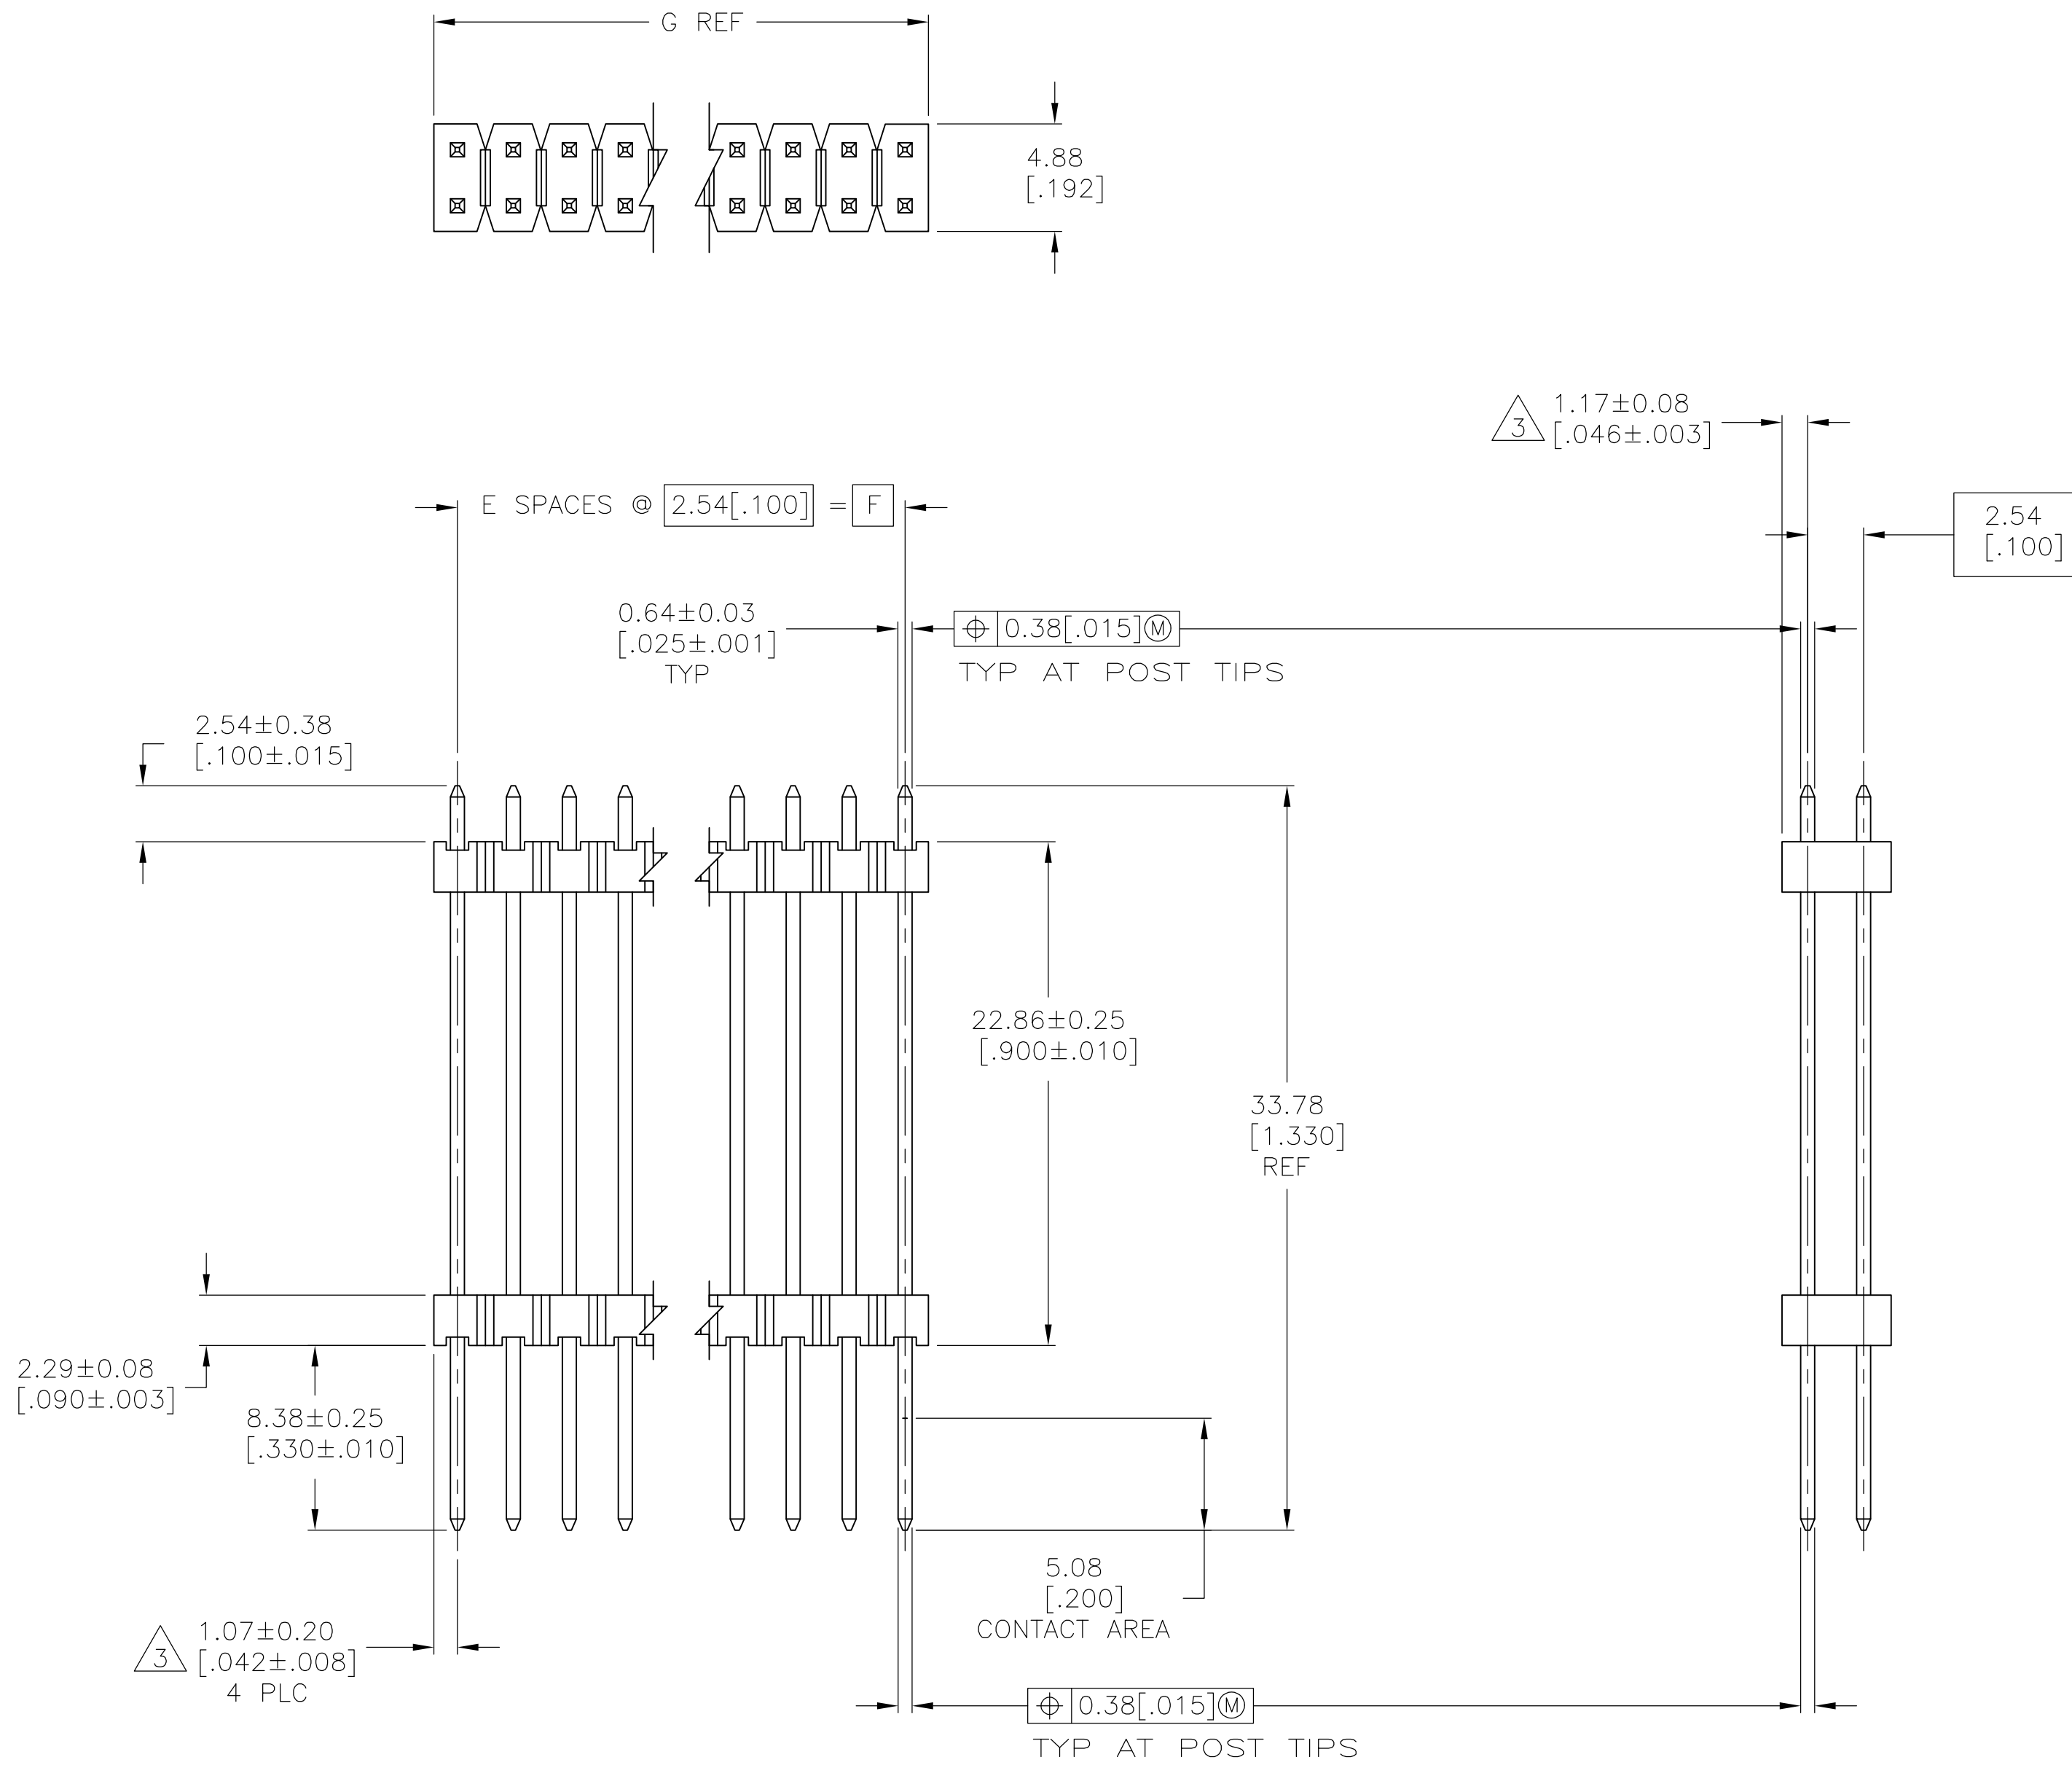

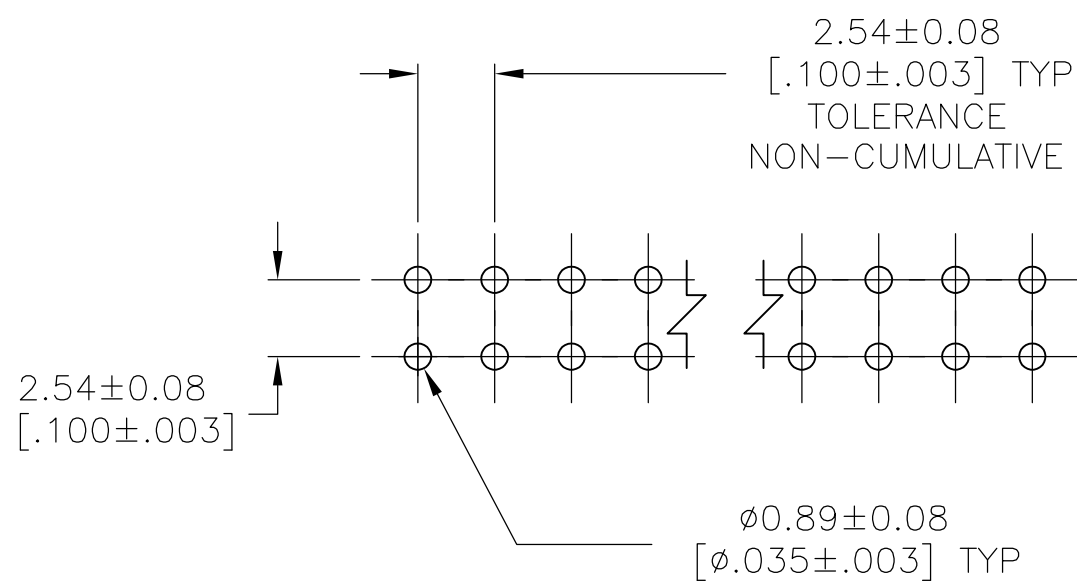

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOCAD

DIST00

REV

DATE

BY

APPROVED

DESCRIPTION

SEE SHEET 1

|                |                   |                  |    |                  |             |
|----------------|-------------------|------------------|----|------------------|-------------|
| △ <sub>6</sub> | 101.19<br>[3.984] | 99.06<br>[3.900] | 39 | 80               | 9-146506-0  |
| △ <sub>6</sub> | 98.65<br>[3.884]  | 96.52<br>[3.800] | 38 | 78               | 8-146506-9  |
| △ <sub>6</sub> | 96.11<br>[3.784]  | 93.98<br>[3.700] | 37 | 76               | 8-146506-8  |
| △ <sub>6</sub> | 93.57<br>[3.684]  | 91.44<br>[3.600] | 36 | 74               | 8-146506-7  |
| △ <sub>6</sub> | 91.03<br>[3.584]  | 88.90<br>[3.500] | 35 | 72               | 8-146506-6  |
| △ <sub>6</sub> | 88.49<br>[3.484]  | 86.36<br>[3.400] | 34 | 70               | 8-146506-5  |
| △ <sub>6</sub> | 85.95<br>[3.384]  | 83.82<br>[3.300] | 33 | 68               | 8-146506-4  |
| △ <sub>6</sub> | 83.41<br>[3.284]  | 81.28<br>[3.200] | 32 | 66               | 8-146506-3  |
| △ <sub>6</sub> | 80.87<br>[3.184]  | 78.74<br>[3.100] | 31 | 64               | 8-146506-2  |
| △ <sub>6</sub> | 78.33<br>[3.084]  | 76.20<br>[3.000] | 30 | 62               | 8-146506-1  |
| △ <sub>6</sub> | 75.79<br>[2.984]  | 73.66<br>[2.900] | 29 | 60               | 8-146506-0  |
| △ <sub>6</sub> | 73.25<br>[2.884]  | 71.12<br>[2.800] | 28 | 58               | 7-146506-9  |
| △ <sub>6</sub> | 70.71<br>[2.784]  | 68.58<br>[2.700] | 27 | 56               | 7-146506-8  |
| △ <sub>6</sub> | 68.17<br>[2.684]  | 66.04<br>[2.600] | 26 | 54               | 7-146506-7  |
| △ <sub>6</sub> | 65.63<br>[2.584]  | 63.50<br>[2.500] | 25 | 52               | 7-146506-6  |
| △ <sub>6</sub> | 63.09<br>[2.484]  | 60.96<br>[2.400] | 24 | 50               | 7-146506-5  |
| △ <sub>6</sub> | 60.55<br>[2.384]  | 58.42<br>[2.300] | 23 | 48               | 7-146506-4  |
| △ <sub>6</sub> | 58.01<br>[2.284]  | 55.88<br>[2.200] | 22 | 46               | 7-146506-3  |
| △ <sub>6</sub> | 55.47<br>[2.184]  | 53.34<br>[2.100] | 21 | 44               | 7-146506-2  |
| △ <sub>6</sub> | 52.93<br>[2.084]  | 50.80<br>[2.000] | 20 | 42               | 7-146506-1  |
| △ <sub>6</sub> | 50.39<br>[1.984]  | 48.26<br>[1.900] | 19 | 40               | 7-146506-0  |
| △ <sub>6</sub> | 47.85<br>[1.884]  | 45.72<br>[1.800] | 18 | 38               | 6-146506-9  |
| △ <sub>6</sub> | 45.31<br>[1.784]  | 43.18<br>[1.700] | 17 | 36               | 6-146506-8  |
| △ <sub>6</sub> | 42.77<br>[1.684]  | 40.64<br>[1.600] | 16 | 34               | 6-146506-7  |
| △ <sub>6</sub> | 40.23<br>[1.584]  | 38.10<br>[1.500] | 15 | 32               | 6-146506-6  |
| △ <sub>6</sub> | 37.69<br>[1.484]  | 35.56<br>[1.400] | 14 | 30               | 6-146506-5  |
| △ <sub>6</sub> | 35.15<br>[1.384]  | 33.02<br>[1.300] | 13 | 28               | 6-146506-4  |
| △ <sub>6</sub> | 32.61<br>[1.284]  | 30.48<br>[1.200] | 12 | 26               | 6-146506-3  |
| △ <sub>6</sub> | 30.07<br>[1.184]  | 27.94<br>[1.100] | 11 | 24               | 6-146506-2  |
| △ <sub>6</sub> | 27.53<br>[1.084]  | 25.40<br>[1.000] | 10 | 22               | 6-146506-1  |
| △ <sub>6</sub> | 24.99<br>[.984]   | 22.86<br>[.900]  | 9  | 20               | 6-146506-0  |
| △ <sub>6</sub> | 22.45<br>[.884]   | 20.32<br>[.800]  | 8  | 18               | 5-146506-9  |
| △ <sub>6</sub> | 19.91<br>[.784]   | 17.78<br>[.700]  | 7  | 16               | 5-146506-8  |
| △ <sub>6</sub> | 17.37<br>[.684]   | 15.24<br>[.600]  | 6  | 14               | 5-146506-7  |
| △ <sub>6</sub> | 14.83<br>[.584]   | 12.70<br>[.500]  | 5  | 12               | 5-146506-6  |
| △ <sub>6</sub> | 12.29<br>[.484]   | 10.16<br>[.400]  | 4  | 10               | 5-146506-5  |
| △ <sub>6</sub> | 9.75<br>[.384]    | 7.62<br>[.300]   | 3  | 8                | 5-146506-4  |
| △ <sub>6</sub> | 7.21<br>[.284]    | 5.08<br>[.200]   | 2  | 6                | 5-146506-3  |
| △ <sub>6</sub> | 4.67<br>[.184]    | 2.54<br>[.100]   | 1  | 4                | 5-146506-2  |
| △ <sub>6</sub> | 2.13<br>[.084]    | -                | -  | 2                | 5-146506-1  |
| PLATING        | G                 | F                | E  | NO. OF POSITIONS | PART NUMBER |

|                |                   |                  |    |                  |             |
|----------------|-------------------|------------------|----|------------------|-------------|
| △ <sub>5</sub> | 101.19<br>[3.984] | 99.06<br>[3.900] | 39 | 80               | 4-146506-0  |
| △ <sub>5</sub> | 98.65<br>[3.884]  | 96.52<br>[3.800] | 38 | 78               | 3-146506-9  |
| △ <sub>5</sub> | 96.11<br>[3.784]  | 93.98<br>[3.700] | 37 | 76               | 3-146506-8  |
| △ <sub>5</sub> | 93.57<br>[3.684]  | 91.44<br>[3.600] | 36 | 74               | 3-146506-7  |
| △ <sub>5</sub> | 91.03<br>[3.584]  | 88.90<br>[3.500] | 35 | 72               | 3-146506-6  |
| △ <sub>5</sub> | 88.49<br>[3.484]  | 86.36<br>[3.400] | 34 | 70               | 3-146506-5  |
| △ <sub>5</sub> | 85.95<br>[3.384]  | 83.82<br>[3.300] | 33 | 68               | 3-146506-4  |
| △ <sub>5</sub> | 83.41<br>[3.284]  | 81.28<br>[3.200] | 32 | 66               | 3-146506-3  |
| △ <sub>5</sub> | 80.87<br>[3.184]  | 78.74<br>[3.100] | 31 | 64               | 3-146506-2  |
| △ <sub>5</sub> | 78.33<br>[3.084]  | 76.20<br>[3.000] | 30 | 62               | 3-146506-1  |
| △ <sub>5</sub> | 75.79<br>[2.984]  | 73.66<br>[2.900] | 29 | 60               | 3-146506-0  |
| △ <sub>5</sub> | 73.25<br>[2.884]  | 71.12<br>[2.800] | 28 | 58               | 2-146506-9  |
| △ <sub>5</sub> | 70.71<br>[2.784]  | 68.58<br>[2.700] | 27 | 56               | 2-146506-8  |
| △ <sub>5</sub> | 68.17<br>[2.684]  | 66.04<br>[2.600] | 26 | 54               | 2-146506-7  |
| △ <sub>5</sub> | 65.63<br>[2.584]  | 63.50<br>[2.500] | 25 | 52               | 2-146506-6  |
| △ <sub>5</sub> | 63.09<br>[2.484]  | 60.96<br>[2.400] | 24 | 50               | 2-146506-5  |
| △ <sub>5</sub> | 60.55<br>[2.384]  | 58.42<br>[2.300] | 23 | 48               | 2-146506-4  |
| △ <sub>5</sub> | 58.01<br>[2.284]  | 55.88<br>[2.200] | 22 | 46               | 2-146506-3  |
| △ <sub>5</sub> | 55.47<br>[2.184]  | 53.34<br>[2.100] | 21 | 44               | 2-146506-2  |
| △ <sub>5</sub> | 52.93<br>[2.084]  | 50.80<br>[2.000] | 20 | 42               | 2-146506-1  |
| △ <sub>5</sub> | 50.39<br>[1.984]  | 48.26<br>[1.900] | 19 | 40               | 2-146506-0  |
| △ <sub>5</sub> | 47.85<br>[1.884]  | 45.72<br>[1.800] | 18 | 38               | 1-146506-9  |
| △ <sub>5</sub> | 45.31<br>[1.784]  | 43.18<br>[1.700] | 17 | 36               | 1-146506-8  |
| △ <sub>5</sub> | 42.77<br>[1.684]  | 40.64<br>[1.600] | 16 | 34               | 1-146506-7  |
| △ <sub>5</sub> | 40.23<br>[1.584]  | 38.10<br>[1.500] | 15 | 32               | 1-146506-6  |
| △ <sub>5</sub> | 37.69<br>[1.484]  | 35.56<br>[1.400] | 14 | 30               | 1-146506-5  |
| △ <sub>5</sub> | 35.15<br>[1.384]  | 33.02<br>[1.300] | 13 | 28               | 1-146506-4  |
| △ <sub>5</sub> | 32.61<br>[1.284]  | 30.48<br>[1.200] | 12 | 26               | 1-146506-3  |
| △ <sub>5</sub> | 30.07<br>[1.184]  | 27.94<br>[1.100] | 11 | 24               | 1-146506-2  |
| △ <sub>5</sub> | 27.53<br>[1.084]  | 25.40<br>[1.000] | 10 | 22               | 1-146506-1  |
| △ <sub>5</sub> | 24.99<br>[.984]   | 22.86<br>[.900]  | 9  | 20               | 1-146506-0  |
| △ <sub>5</sub> | 22.45<br>[.884]   | 20.32<br>[.800]  | 8  | 18               | 146506-9    |
| △ <sub>5</sub> | 19.91<br>[.784]   | 17.78<br>[.700]  | 7  | 16               | 146506-8    |
| △ <sub>5</sub> | 17.37<br>[.684]   | 15.24<br>[.600]  | 6  | 14               | 146506-7    |
| △ <sub>5</sub> | 14.83<br>[.584]   | 12.70<br>[.500]  | 5  | 12               | 146506-6    |
| △ <sub>5</sub> | 12.29<br>[.484]   | 10.16<br>[.400]  | 4  | 10               | 146506-5    |
| △ <sub>5</sub> | 9.75<br>[.384]    | 7.62<br>[.300]   | 3  | 8                | 146506-4    |
| △ <sub>5</sub> | 7.21<br>[.284]    | 5.08<br>[.200]   | 2  | 6                | 146506-3    |
| △ <sub>5</sub> | 4.67<br>[.184]    | 2.54<br>[.100]   | 1  | 4                | 146506-2    |
| △ <sub>5</sub> | 2.13<br>[.084]    | -                | -  | 2                | 146506-1    |
| PLATING        | G                 | F                | E  | NO. OF POSITIONS | PART NUMBER |

4805 (3/11)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -  
1 PLC ± 0.5[.02]  
2 PLC ± 0.13[.005]  
3 PLC ± -  
4 PLC ± -  
ANGLES ± -

SEE TABLE

MATERIAL

DWN R BROWN 19OCT2006  
CHK J GESFORD 19OCT2006  
APVD J GESFORD 19OCT2006

PRODUCT SPEC  
APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

NAME

SIZE CAGE CODE DRAWING NO  
A1 00779 146506

RESTRICTED TO

TE Connectivity

HEADER ASSEMBLY, MOD II,  
STACKING, DOUBLE ROW,  
.025 SQ.POST, UNSHROUDED

SCALE 4:1 SHEET 2 OF 2 REV A1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146506-7](#)