





NOTES: UNLESS OTHERWISE SPECIFIED

- FOR USE WITH RG-316 OR EQUIVALENT CABLE.
- MATERIAL SPECIFICATIONS:
INSULATORS: PTFE
SPACER: DELRIN
OUTER CONTACT: BERYLLIUM COPPER
ALL OTHER METAL PARTS: BRASS
- FINISH SPECIFICATIONS:
CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL
ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER
- ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 6 GHz
VSWR: 1.5 MAX
- CAP, SPACER AND FERRULE SHIPPED LOOSE
- CRIMP FERRULE (.128 HEX) AND SOLDER TO CONTACT PIN.

REV	DESCRIPTION	BY DATE	APPD
A	ER058863	JL 06/29/15	DCAM

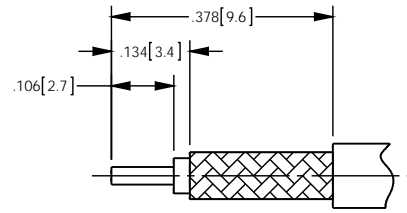

RECOMMENDED
CABLE STRIPPING DIM'S

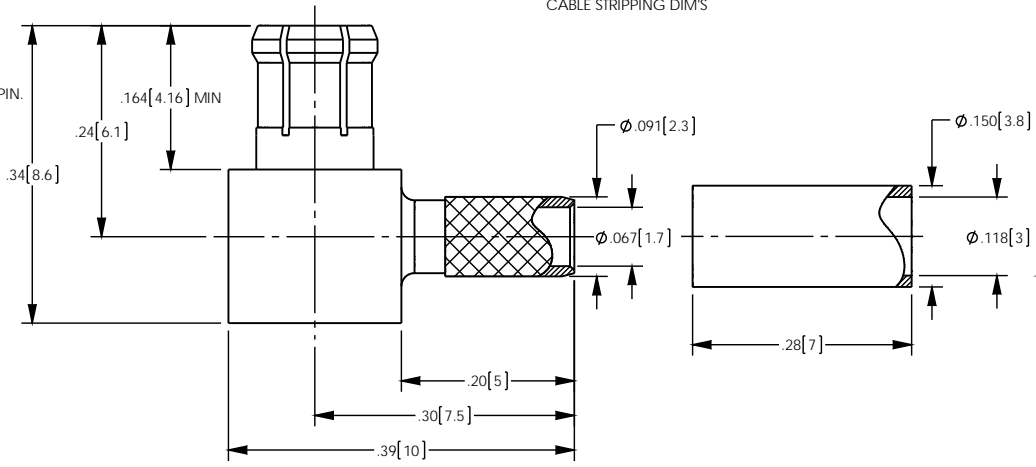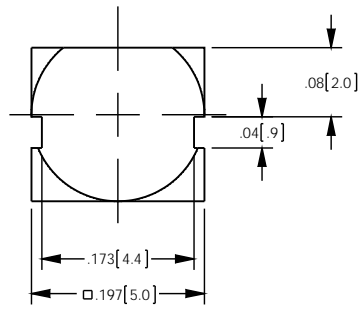

CATALOG P/N: 1213A204M

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX [XX] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXXX] ± .XXXX		 by WINCHESTER Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762	
CUSTOMER SALES DRAWING		THIRD ANGLE 	
DRAWN JL	DATE 06/24/2015	APPROVED JL	DATE 06/29/2015
APPROVED DCAM	DATE 06/29/2015	APPROVED XXX	DATE XX/XX/XX
SCALE: 6:1		MCX R/A CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U)	
A		1213A204M	SHIT OF REV 1 1 A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bomar Interconnect:](#)

[1213A204M](#)