
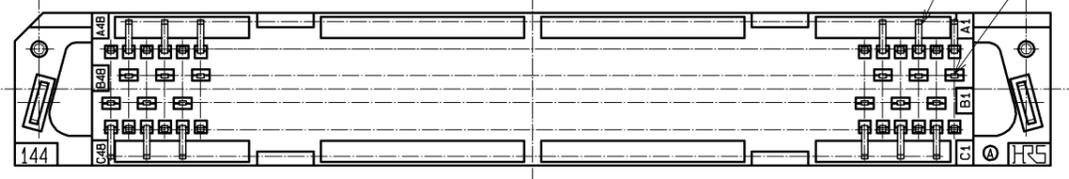
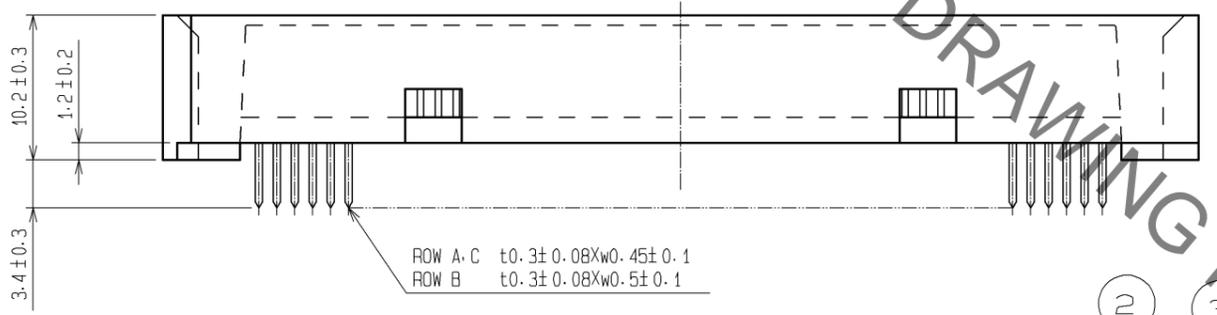


Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

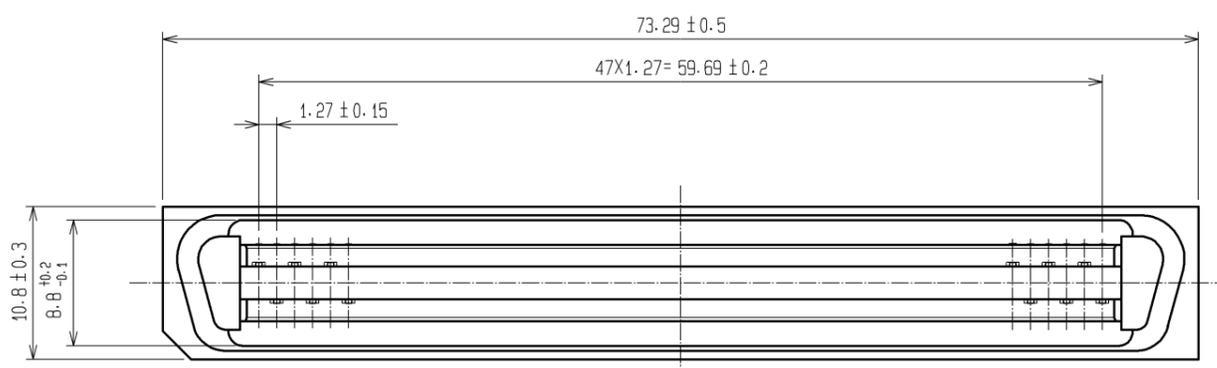


CONTACTING ORDER OF TERMINAL

1	ROW B
2	ROW A·C

LOT No. MARKING



RECOMMENDED HOLE PATTERN DIMENSION OF PCB (MOUNTING SIDE) (FREE)

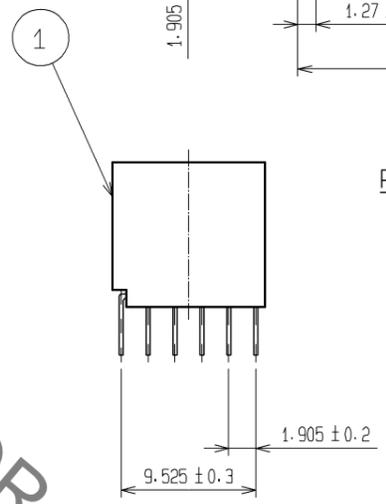

1	PPS	BLACK	UL94V-0	2, 3	BRASS	CONTACT AREA: GOLD 0.2µm min. DIP AREA: TIN-PLATING 2µm min. UNDER PLATED: NICKEL 2.5µm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED	: HS. OKAWA	11.01.25	DRAWING NO. EDC3-082147-21			
		CHECKED	: HT. YAMAGUCHI	11.01.25	PART NO. FX1-144P-1.27DSA(71)			
		DESIGNED	: YJ. ASAO	11.01.24	CODE NO. CL571-0303-0-71			
		DRAWN	: YJ. ASAO	11.01.24				