

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2004.

© COPYRIGHT 2004 By --

ALL RIGHTS RESERVED.

LOC
JDIST
/

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

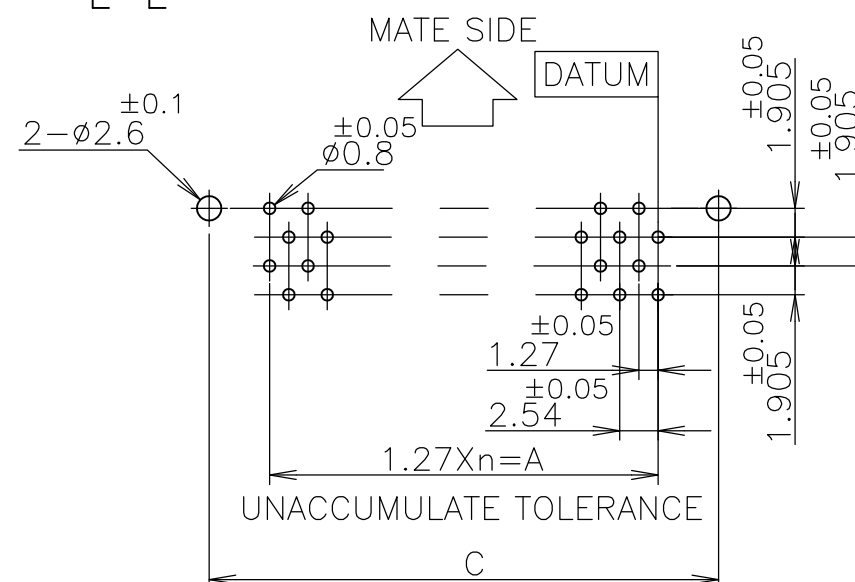
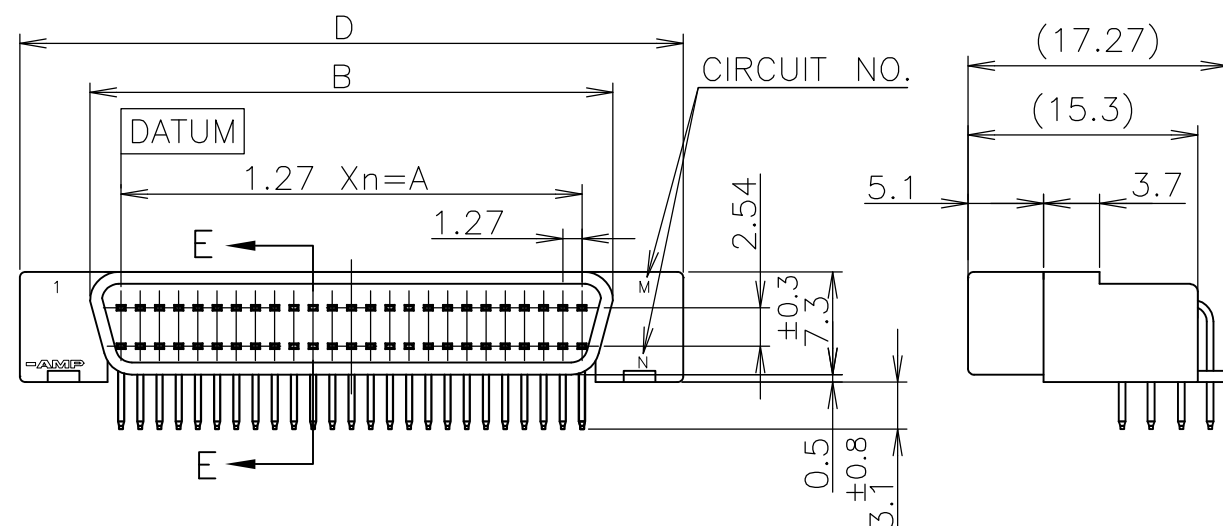
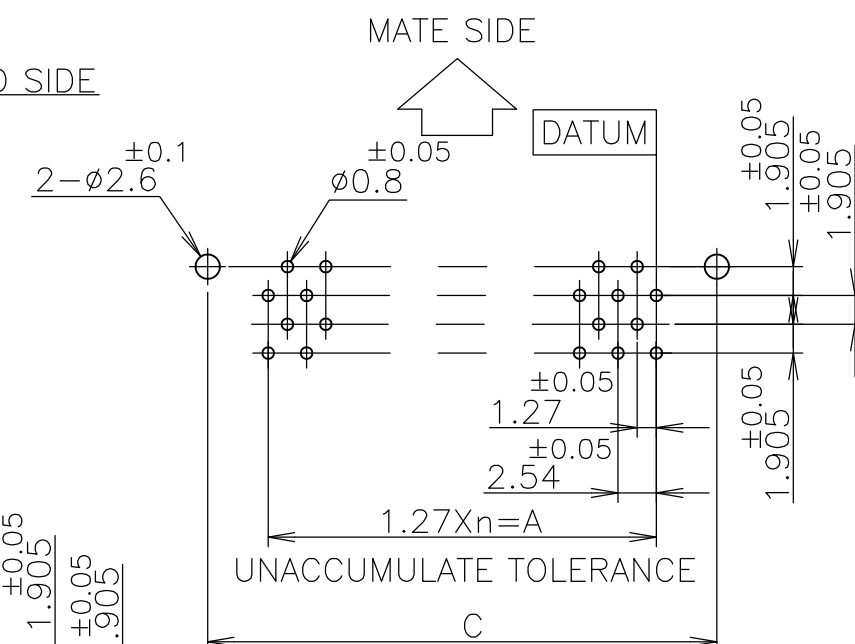
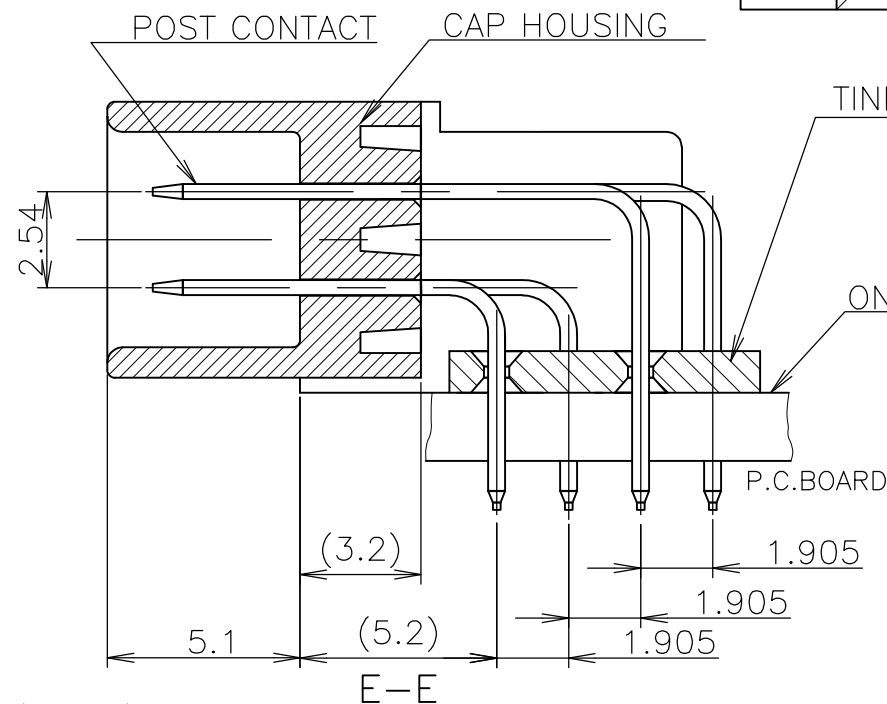
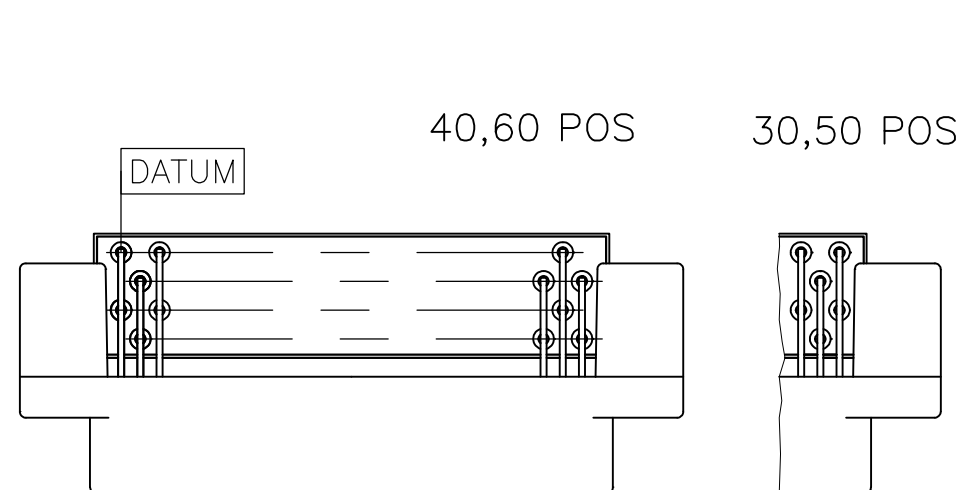
B

REVISED PER ECO-15-002720

02MAR2015

AP

SB

40,60 POS
ON BOARD SIDE


OBSOLETE	6-5174218-4	Au PL. 0.00076 MIN.	6-	4	60	29	36.83	42.80	44.23	48.14
	6-5174218-3		6-	3	50	24	30.48	36.45	37.88	41.79
	6-5174218-2		6-	2	40	19	24.13	30.10	31.53	35.44
	6-5174218-1		6-	1	30	14	17.78	23.75	25.18	29.09
OBSOLETE	5174218-4	Au PL. 0.0002 MIN.		4	60	29	36.83	42.80	44.23	48.14
	5174218-3			3	50	24	30.48	36.45	37.88	41.79
	5174218-2			2	40	19	24.13	30.10	31.53	35.44
OBSOLETE	SUPERSEDE BY 5174218-1			5174218-1	30	14	17.78	23.75	25.18	29.09
		REMARK	PART NUMBER	POS	n	A	B	C	D	

- 1 USE A P.C.B. WHOSE ARE TREATED WITH SOLDER RESIST.
- 2 SHOW P.C.B LAYOUT FROM ON BOARD SURFACE SIDE.
- 3 NUMBER THE CONTACT IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM "DATUM" SIDE.
- 4 THIS CONNECTOR IS FIXED BY SOLDERING.
- 5 HOUSING MATERIAL : P.B.T(UL94V-0) / BLACK
- 6 CONTACT MATERIAL : PHO-BRONZE
- 7 FINISH : NICKEL 0.00127 MIN THK. OVERALL SELECTIVE GOLD 0.00076 OR 0.0002 MIN. THK ON CONTACT AREA AND TIN 0.001 MIN THK. ON TINE AREA.

GENERAL TOLERANCE

10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

SEE NOTE 5/6

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

SEE NOTE 7

DWN COREL WANG 20AUG04

CHK STEVEN YAO 20AUG04

APVD I.ENOMOTO 20AUG04

PRODUCT SPEC

108-60036

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

CAP ASSY (HORIZONTAL / W/O LEG)
AMPLIMITE .050 SERIES I B-TO-B CONN.

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-5174214

SCALE

2:1

SHEET

1 OF 1

REV

B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-5174214-1](#)