

REV. C  
DCO 301387


TOLERANCES  $\pm 0.010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C  
 RESISTANCE 70 OHMS  $\pm 10\%$   
 NOMINAL VOLTAGE 12 VDC  
 MUST OPERATE 6.5 VDC MAX.  
COIL TRANSIENT SUPPRESSION: 42 VDC MAX.  
 MUST RELEASE 3.3 VDC MAX., 0.75 VDC MIN.

ENVIRONMENT:  
 VIBRATION 57 Hz TO 3000 Hz @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 15 MS MAX.  
CONTACT STABILIZATION 2.5 MS MAX.  
CONTACT BOUNCE 1 MS MAX.  
CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

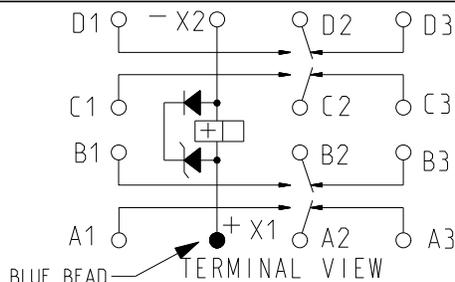

CONTACT RATING: LOW LEVEL  
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE  
100,000 OPERATIONS

DR. R.F. 21APR2011 CK. M.B. 26APR2011



CUST. QPL  
 CUST. NO. M83536/16-016M REV. ----

TE NUMBER  
1-1617754-2

CII PART NUMBER  
FC A-410-1616M

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-410-1616M](#)