
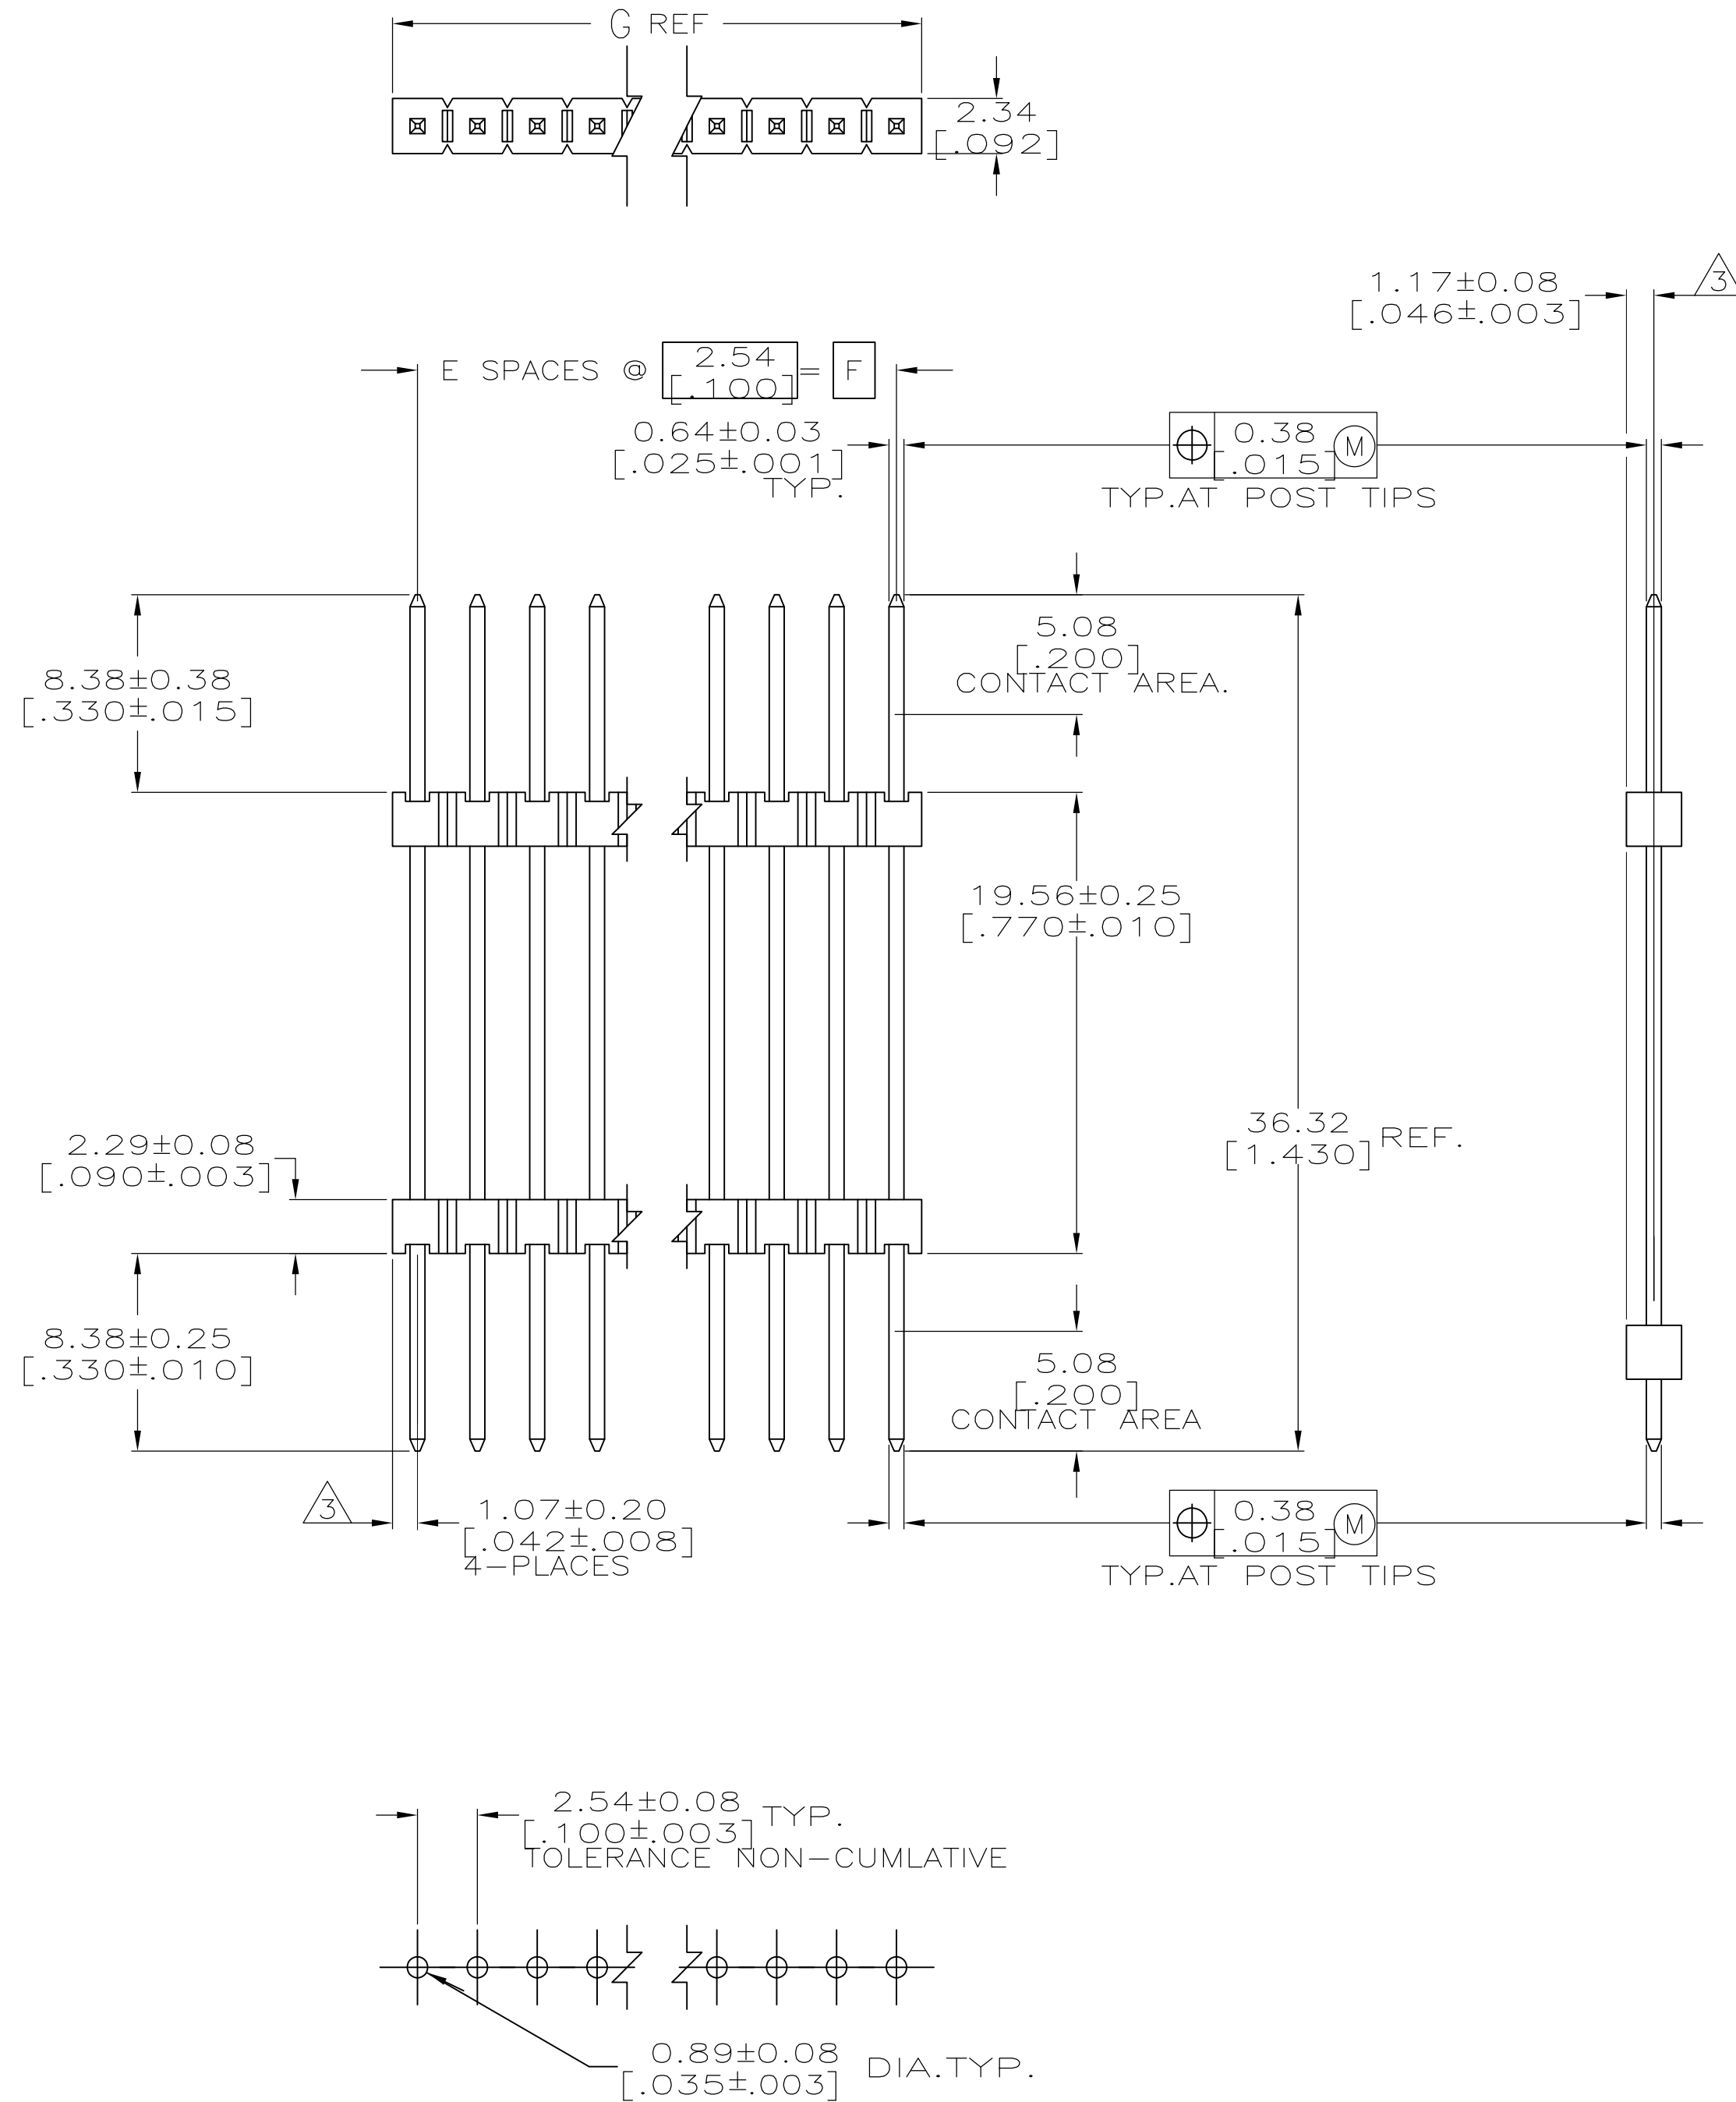


1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.



RECOMMENDED HOLE LAYOUT

[3.984]	[3.900]	39	40	4-146482-0
[3.884]	[3.800]	38	39	3-146482-9
[3.784]	[3.700]	37	38	3-146482-8
[3.684]	[3.600]	36	37	3-146482-7
[3.584]	[3.500]	35	36	3-146482-6
[3.484]	[3.400]	34	35	3-146482-5
[3.384]	[3.300]	33	34	3-146482-4
[3.284]	[3.200]	32	33	3-146482-3
[3.184]	[3.100]	31	32	3-146482-2
[3.084]	[3.000]	30	31	3-146482-1
[2.984]	[2.900]	29	30	3-146482-0
[2.884]	[2.800]	28	29	2-146482-9
[2.784]	[2.700]	27	28	2-146482-8
[2.684]	[2.600]	26	27	2-146482-7
[2.584]	[2.500]	25	26	2-146482-6
[2.484]	[2.400]	24	25	2-146482-5
[2.384]	[2.300]	23	24	2-146482-4
[2.284]	[2.200]	22	23	2-146482-3
[2.184]	[2.100]	21	22	2-146482-2
[2.084]	[2.000]	20	21	2-146482-1
[1.984]	[1.900]	19	20	2-146482-0
[1.884]	[1.800]	18	19	1-146482-9
[1.784]	[1.700]	17	18	1-146482-8
[1.684]	[1.600]	16	17	1-146482-7
[1.584]	[1.500]	15	16	1-146482-6
[1.484]	[1.400]	14	15	1-146482-5
[1.384]	[1.300]	13	14	1-146482-4
[1.284]	[1.200]	12	13	1-146482-3
[1.184]	[1.100]	11	12	1-146482-2
[1.084]	[1.000]	10	11	1-146482-1
[.984]	[.900]	9	10	1-146482-0
[.884]	[.800]	8	9	146482-9
[.784]	[.700]	7	8	146482-8
[.684]	[.600]	6	7	146482-7
[.584]	[.500]	5	6	146482-6
[.484]	[.400]	4	5	146482-5
[.384]	[.300]	3	4	146482-4
[.284]	[.200]	2	3	146482-3
[.184]	[.100]	1	2	146482-2
[.084]	-	-	1	146482-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 14-MAR-97 E. BRANDBERG OK G. DUBNICZKI 14-MAR-97 G. DUBNICZKI 14-MAR-97		POSITIONS  TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.127[.0005] ANGLES ±		NAME HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
		PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A1 00779 C-146482	
MATERIAL 		FINISH 		RESTRICTED TO -	
		WEIGHT -		SCALE 4:1 SHEET 1 OF 1 REV P	
CUSTOMER DRAWING					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146482-4](#)