


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		D1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

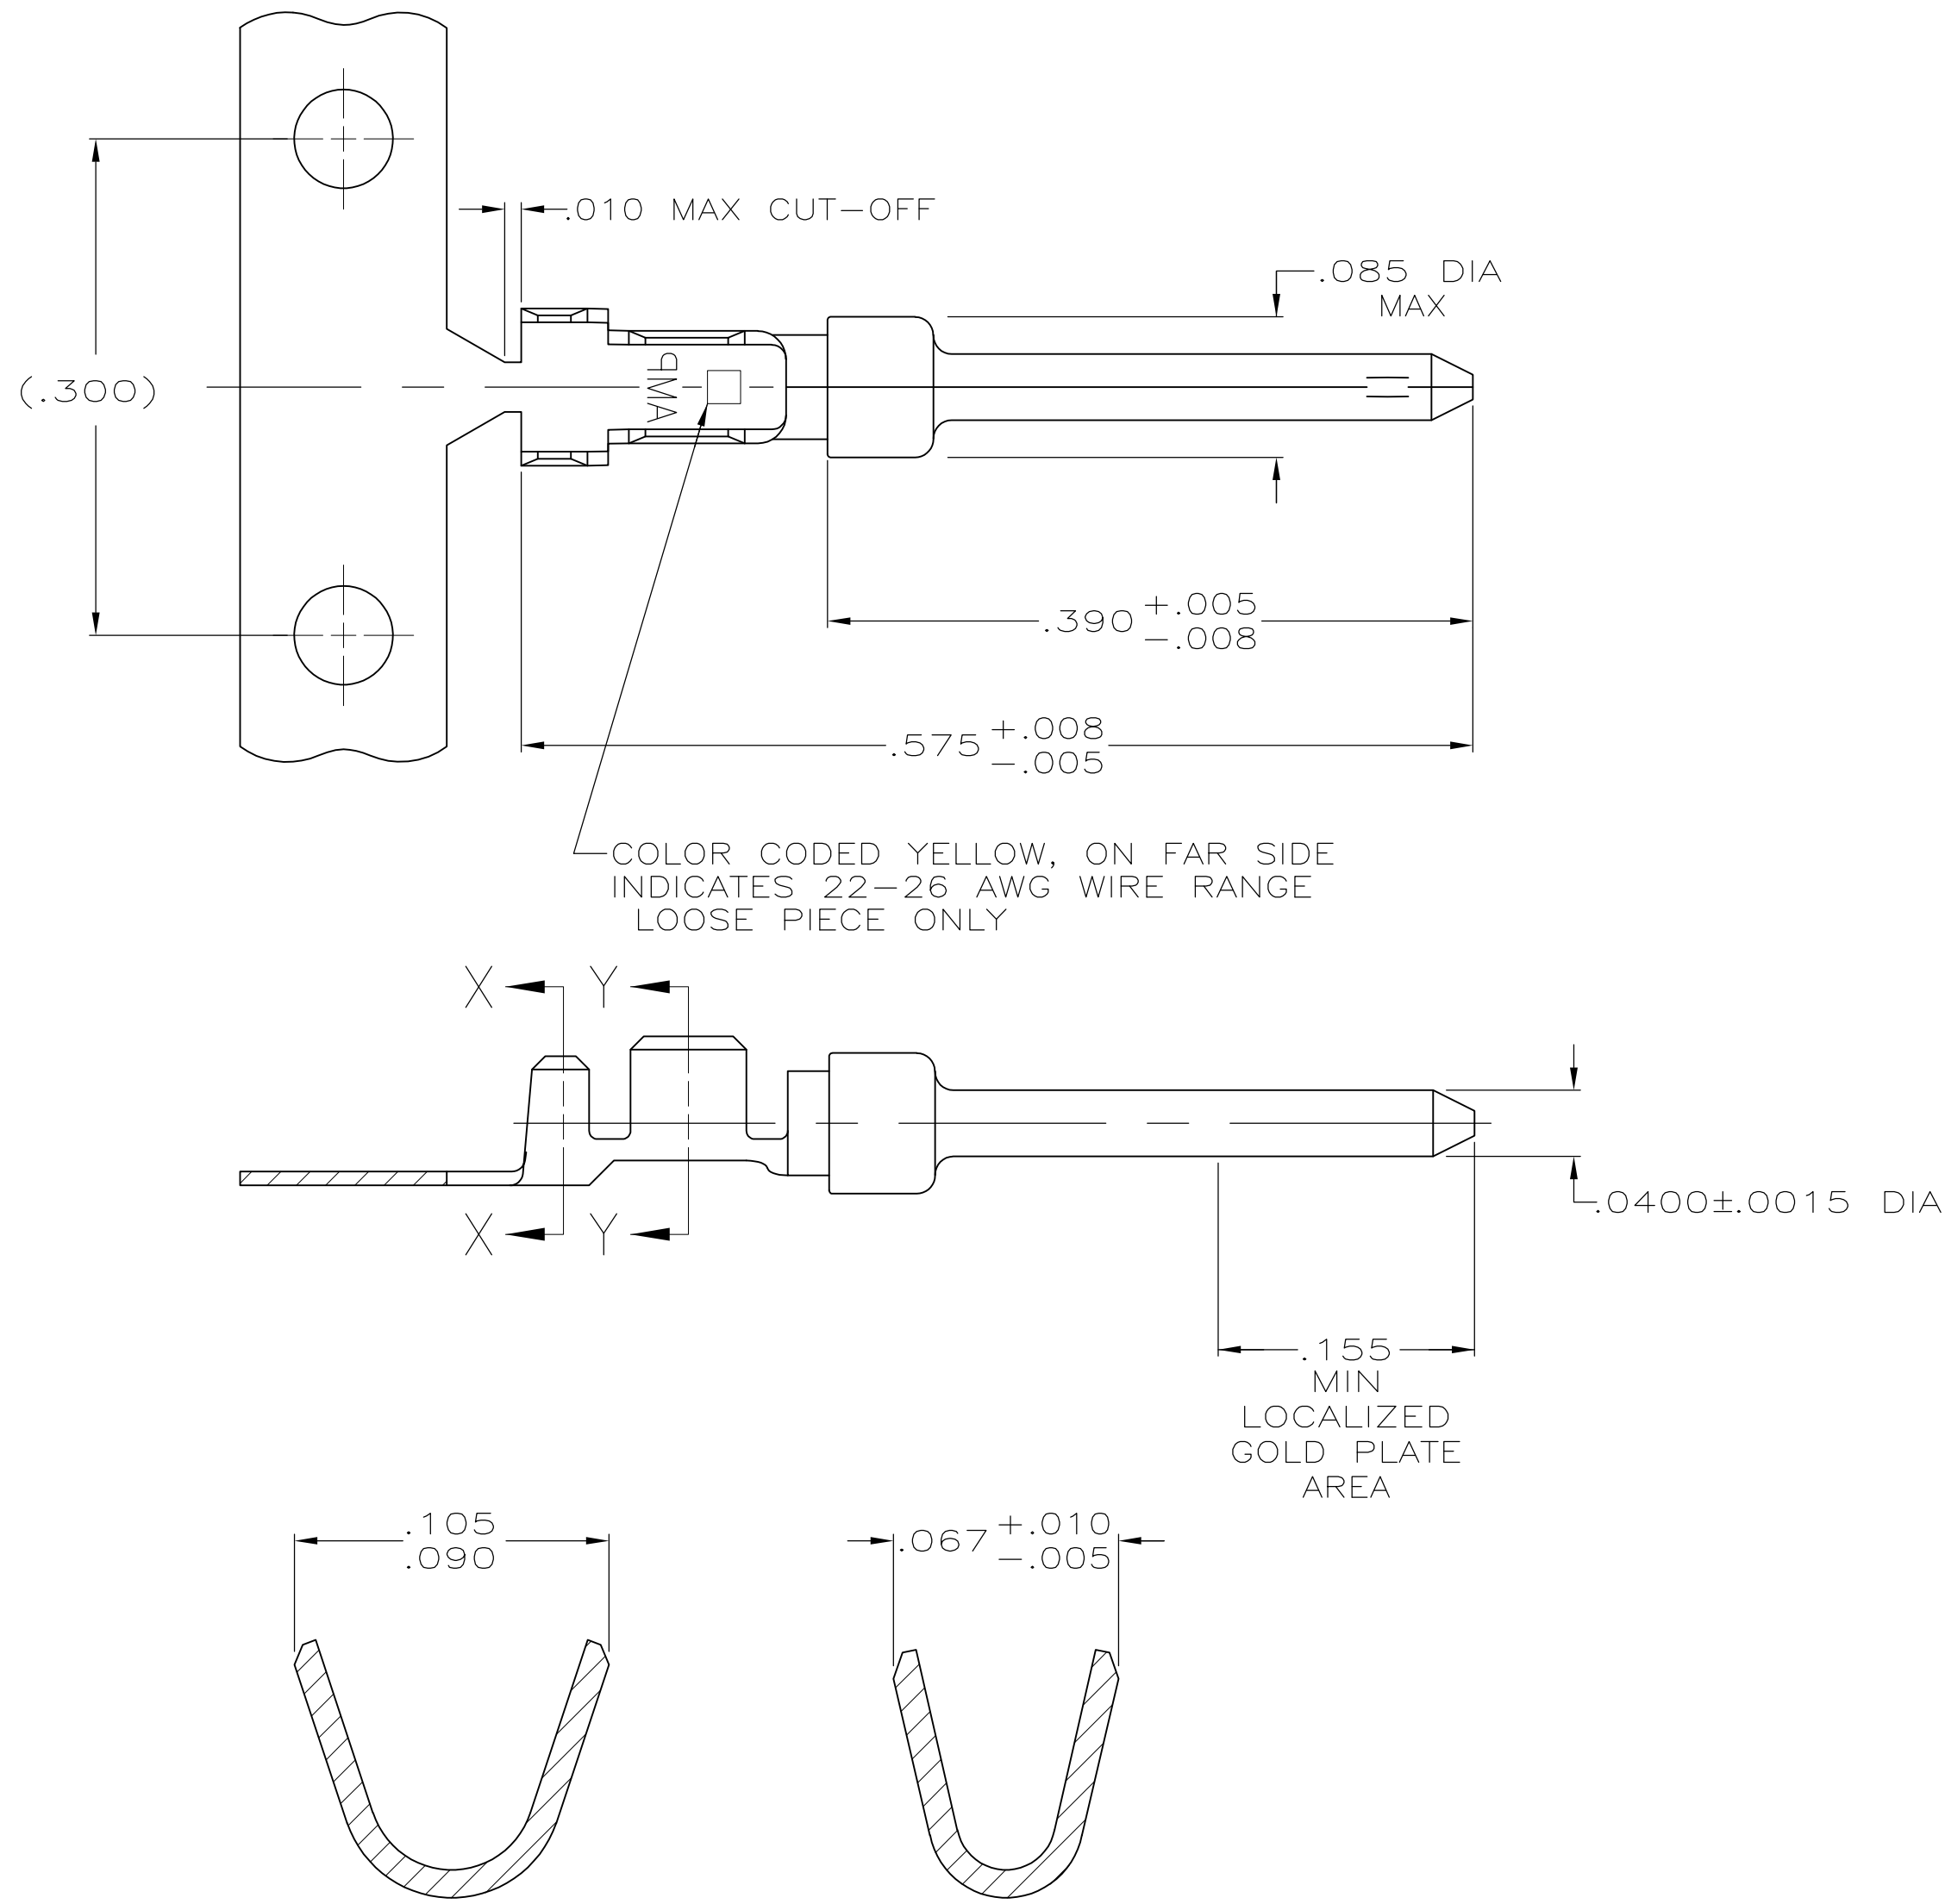

- 1 FOR MINI-APPLICATOR.
- 2 FOR HAND TOOL USE ONLY.
3. WIRE RANGE OF 22-26, INSULATION RANGE OF .040-.050.
4. TIN PLATING MAY NOT APPEAR ON CARRIER STRIP.
- 5 GOLD PLATED IN LOCALIZED GOLD PLATE AREA AS FOLLOWS:
.000030 MIN GOLD IN MATED AREA, .000100 MIN TIN ON WIRE BARRELS, ALL OVER .000050 MIN NICKEL UNDERPLATE.
OR
GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL IN MATED AREA, .000100 MIN TIN ON WIRE BARRELS, ALL OVER .000050 MIN NICKEL UNDERPLATE.
- 6 GOLD FLASH IN LOCALIZED GOLD PLATE AREA, .000100 MIN TIN ON WIRE BARRELS, ALL OVER .000050 MIN NICKEL UNDERPLATE.

OBSOLETE	6	2	LOOSE PIECE	1658544-4
	6	1	STRIP	1658544-3
	5	1	STRIP	1658544-2
	5	2	LOOSE PIECE	1658544-1
FINISH		USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11-17-04 L. VARELA - DOCK5		 TE Connectivity		
		CHK 11-17-04 J. GERACE				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PIN CONTACT, 20 DF, 22-26 AWG, AMPLIMITE —		
	APVD 11-17-04 M. WALMSLEY		PRODUCT SPEC 108-40005			
	APPLICATION SPEC 114-10000		SIZE A2			
	WEIGHT —		CAGE CODE 00779			
	MATERIAL BRASS		DRAWING NO C=1658544			
FINISH SEE TABLE		RESTRICTED TO —		SCALE 10:1		
CUSTOMER DRAWING		SHEET 1 of 1		REV D1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1658544-2 \(Mouser Reel\)](#)