


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT — BY TYCO ELECTRONICS CORPORATION.	ALL INTERNATIONAL RIGHTS RESERVED.
CODE IDENT NO. 26805	3006-7941-00

		LOC	DIST	REVISIONS						
		—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD	
CABLE ENTRY DIAMETER MINIMUM DESIGNED FOR USE WITH RG 402/U (.141) CABLE					A	—	—	—	—	
					B	ECO—09—008295	28MAY09	AEG	JKO	
HOUSING		.142								
CONTACT		.040								

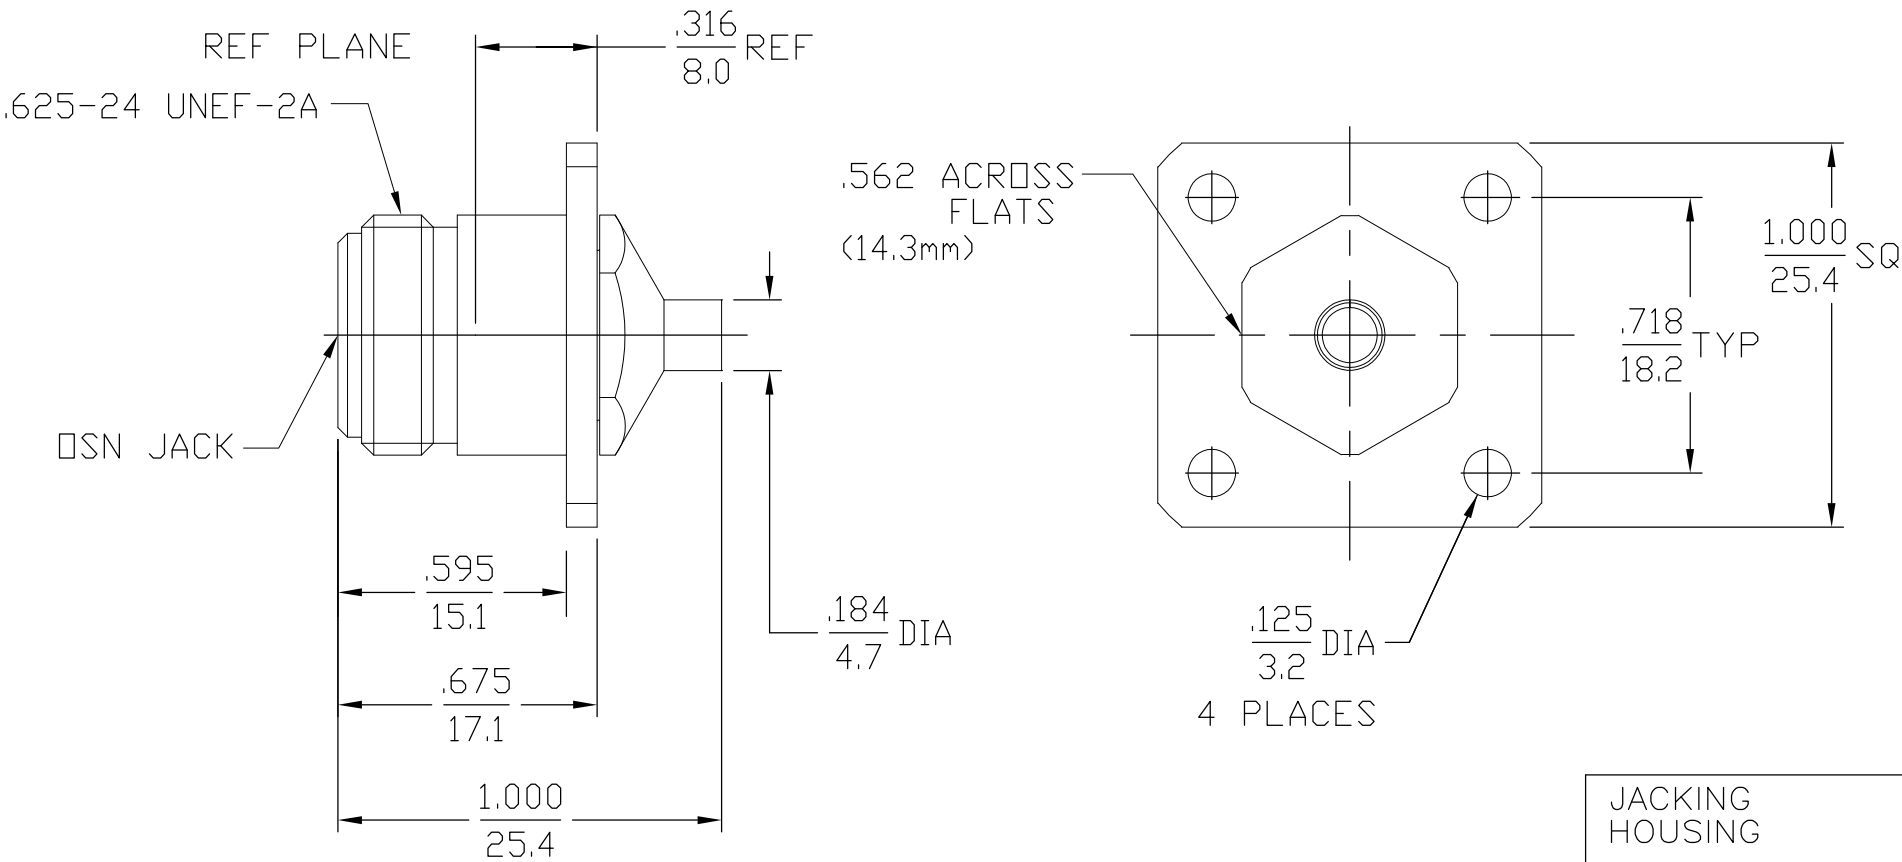

USE ASS'Y PROCEDURE
408-04884
NO. A.P. (30-073)

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 304-2	TEMPERATURE RATING -55°C TO 125°C
Frequency Range (GHz) DC to 10	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition B
Volt Rating (VRMS MAX) @ Sea Level 1000	Torque 12 TO 15 in/lbs	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.07 + .007 X f(GHz)	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B, EXCEPT HIGH TEMP 115°C
Insertion Loss (dB MAX) .05 f(GHz)	Insertion (MAX Lbs) 2.0	Moisture Resistance MIL-STD-202, Method 106, Except Step 7b
RF Leakage (dB MIN @ 2-3 GHz) -90	Withdrawal (MIN Oz) 1.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Corona, 70,000 Ft (VRMS MIN) 750	Force to Engage and Disengage (In-Lbs MAX) 3.0	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 3000	Center Contact Captivation	
Contact Resistance (Milliohms MAX)	Axial (Lbs) N/A	
Center Contact 2.0	Radial (In-Oz) N/A	
Outer Contact 2.0	Cable Retention	
Cable to Housing .05	Axial Force (Lbs) 60 min	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 2500	Torque (In-Oz) 55 min	
I.R.(Megohms MIN) 5000	Weight (Grams) N/A	

JACKING HOUSING	STAINLESS STEEL PER ASTM-A484, AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
HOUSING CABLE ENTRY	BRASS PER ASTM-B-16 HALF HARD	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12/11/95 JOSEPH DINSMORE	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		CHK —	NAME OSN FLANGE MOUNT CABLE JACK-DIRECT SOLDER ATTACHMENT			
DIMENSIONS: INCHES		APVD 12/11/95				
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL		WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C-1057176	RESTRICTED TO —
		FINISH —	CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1
					REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3006-7941-00](#)