

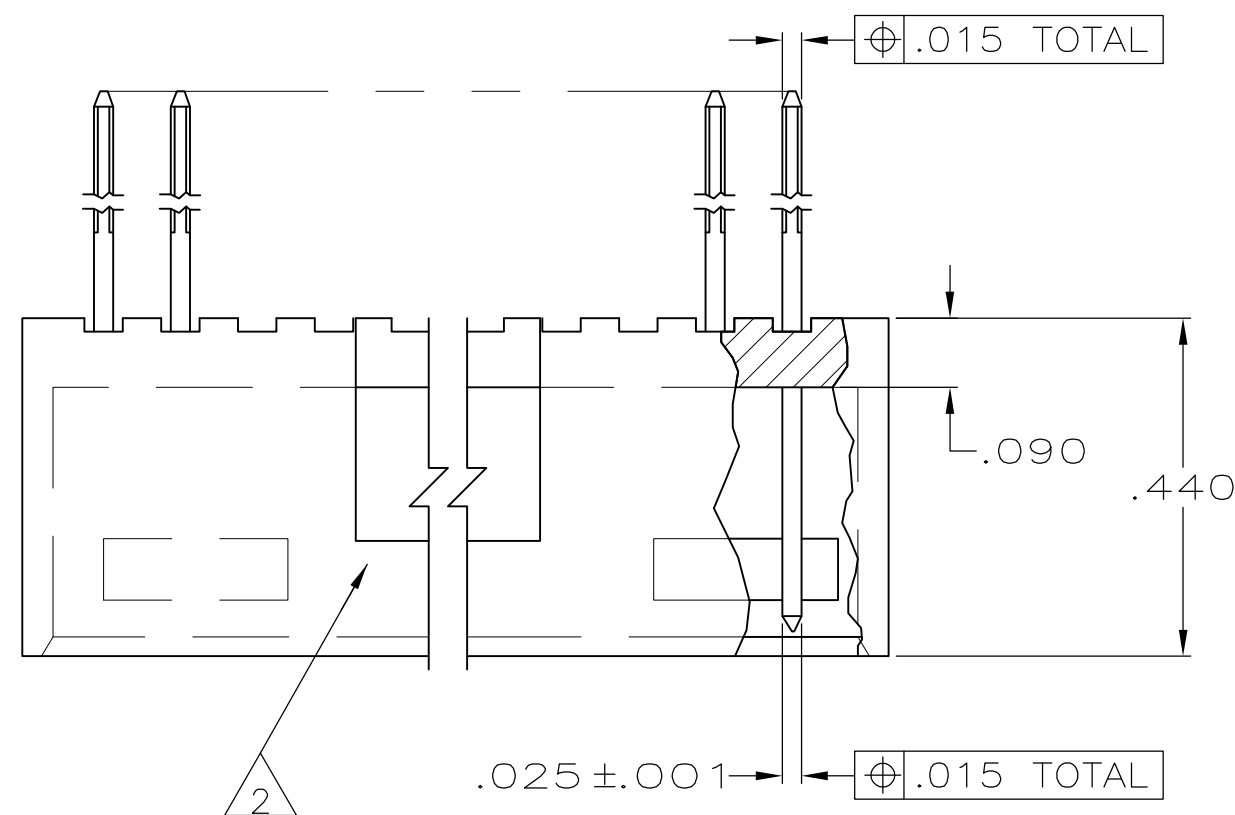




LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R	REVISED PER ECO-11-011767	08JUN11	HMR	MM

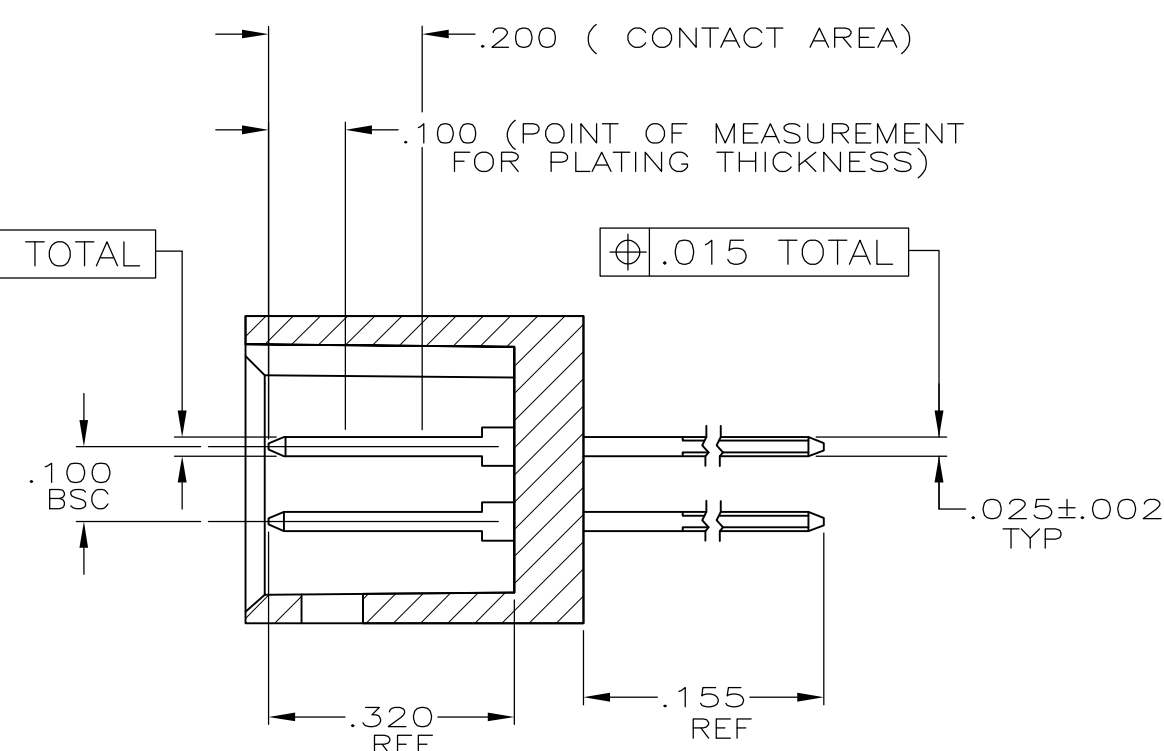

- | | |
|---|--|
| 1 | WILL ALSO MATE W/OTHER CONNECTORS WHICH ARE COMPATIBLE WITH THE .066 END DIM. |
| 2 | ACCESS SLOT. |
| 3 | .000030 GOLD IN CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER .000050 MIN NICKEL ON ENTIRE POST. |
| 4 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

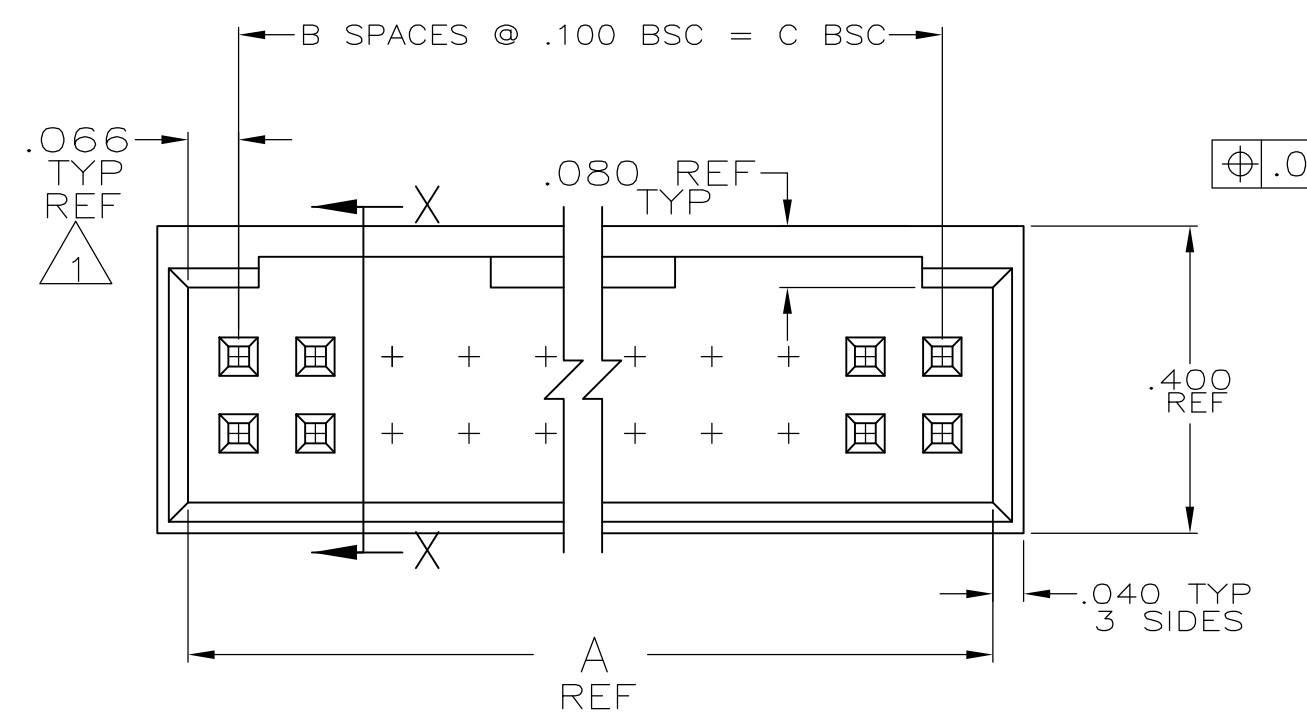

SECTION X—X

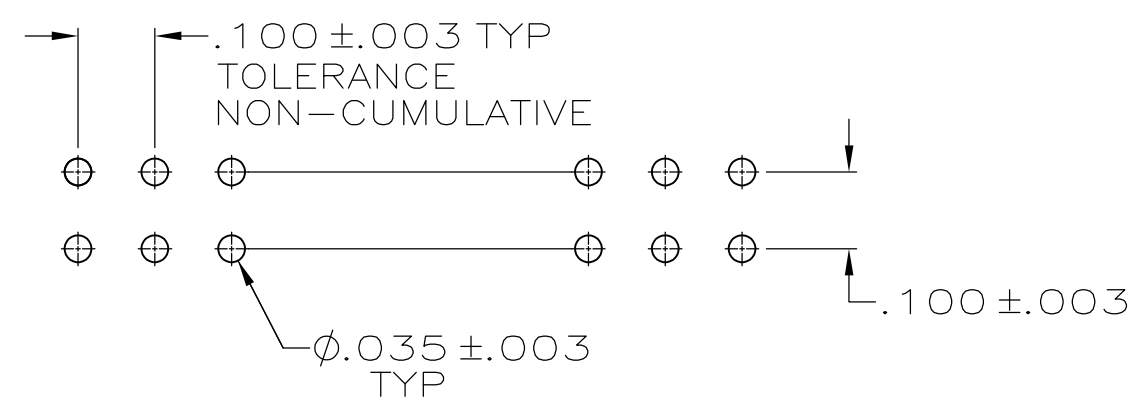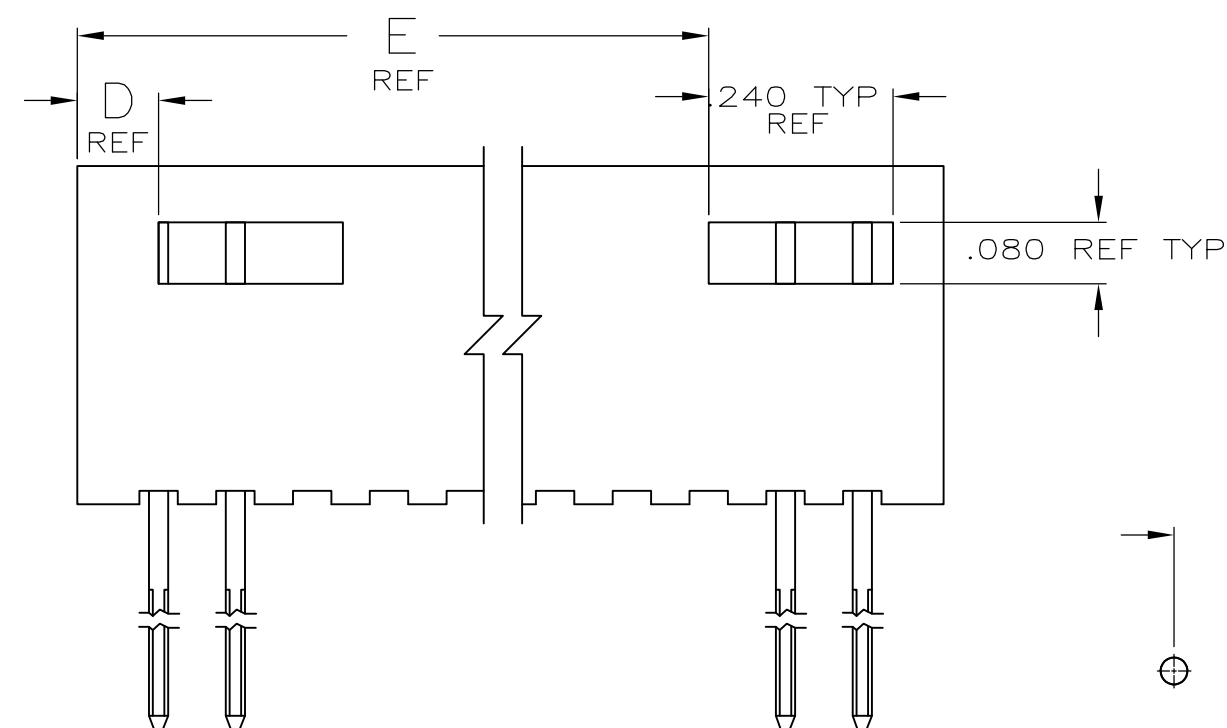

RECOMMENDED HOLE LAYOUT

		—	.106	.300	3	.432	8	3—87690—5	
		—	.106	200	2	.332	6	3—87690—4	
	OBSOLETE	3.506	.106	3.600	36	3.732	74	3—87690—3	
	OBSOLETE	3.406	↑	3.500	35	3.632	72	3—	↑ —2
	OBSOLETE	3.306		3.400	34	3.532	70	3—	—1
	OBSOLETE	3.206		3.300	33	3.432	68	3—	—0
	OBSOLETE	3.106		3.200	32	3.332	66	2—	—9
	OBSOLETE	3.006		3.100	31	3.232	64	2—	—8
	OBSOLETE	2.906		3.000	30	3.132	62	2—	—7
	OBSOLETE	2.806		2.900	29	3.032	60	2—	—6
	OBSOLETE	2.706		2.800	28	2.932	58	2—	—5
	OBSOLETE	2.606		2.700	27	2.832	56	2—	—4
	OBSOLETE	2.506		2.600	26	2.732	54	2—	—3
	OBSOLETE	2.406		2.500	25	2.632	52	2—	—2
	OBSOLETE	2.306		2.400	24	2.532	50	2—	—1
	OBSOLETE	2.206		2.300	23	2.432	48	2—	—0
	OBSOLETE	2.106		2.200	22	2.332	46	1—	—9
	OBSOLETE	2.006		2.100	21	2.232	44	1—	—8
	OBSOLETE	1.906		2.000	20	2.132	42	1—	—7
		1.806		1.900	19	2.032	40	1—	—6
	OBSOLETE	1.706		1.800	18	1.932	38	1—	—5
	OBSOLETE	1.606		1.700	17	1.832	36	1—	—4
	OBSOLETE	1.506		1.600	16	1.732	34	1—	—3
	OBSOLETE	1.406		1.500	15	1.632	32	1—	—2
	OBSOLETE	1.306		1.400	14	1.532	30	1—	—1
	OBSOLETE	1.206		1.300	13	1.432	28	1—	—0
		1.106		1.200	12	1.332	26		—9
		1.006	↓	1.100	11	1.232	24		—8
		.906		1.000	10	1.132	22		—7
	OBSOLETE	.806	.106	.900	9	1.032	20		—6
	OBSOLETE	—	.406	.800	8	.932	18		—5
		—	.306	.700	7	.832	16		↓ —4
		—	.306	.600	6	.732	14		—3
		—	.206	.500	5	.632	12		—2
		—	.206	.400	4	.532	10	87690—1	
		E	D	C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER	080CT98		 TE Connectivity				
		CHK L. REGER	080CT98						
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L. REGER	080CT98		NAME (MATES WITH MOD IV OR LOCKING CLIP ) HEADER ASSEMBLY MOD II .100  .025 SQUARE POST WITH DETAIL				
	0 PLC ± -	PRODUCT SPEC	—						
	1 PLC ± -	APPLICATION SPEC	—						
	2 PLC ± -.005	—	—						
	4 PLC ± -	—	—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
	ANGLES ± -	WEIGHT	—		A2	00779	C-87690	—	
MATERIAL	FINISH	CUSTOMER DRAWING		SCALE	4:1	SHEET	1 of 1	REV	R
HSG.— GLASS FILLED NYLON COLOR—BLACK CONTACT—PHOS. BRONZE	CONTACT— 								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-87690-4](#)