
UNCONTROLLED DOCUMENT

PART NUMBER SSB-LX2685IW


REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10208.	7.8.96
В	E.C.N. #10BRDR, & REDRAWN.	6.25.01

	19.05 [0.750]							
	16	15	14	13	12	11	1 D	9
8.89 [0.350]								
•	1	2	3	4	5	6	7	8

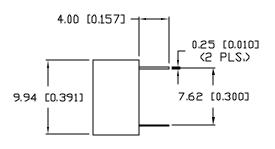


ELECTRO-OPTICAL CH	ARACTEF	RISTICS TA=25°C		$I_f = 20 \text{mA}$	
PARAMETER	MIN	ΤΥP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635		nm	_
FORWARD VOLTAGE		2.1	2.8	v_f	
REVERSE VOLTAGE	5.0			٧r	I _r = 1 00μΑ
AXIAL INTENSITY		80		mcd	$I_f = 20mA$
VIEWING ANGLE		160		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	MILKY	WHITE DIFFUSED)		

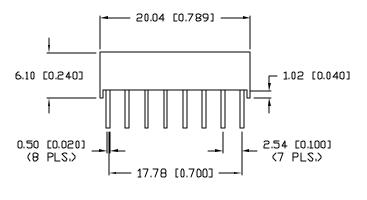

10 11 14 15

9 12 13 16



LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW∕"C
OPERATING, STORAGE TEMP.	- 40 TO + 85	°C
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX
* 1 440 C		

¥ t<10پS

REV. PART NUMBER
B SSB-LX26851W

19.05mm x 8.89mm LIGHT BAR,
MILKY WHITE DIFFUSED.

8

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLISTURE AND DISSEMINATION TO ALL THRO PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com

US WEB: www.lumex.com
TW WEB: www.lumex.com.tw
D BY: APPROVED BY: DATE: 4.8.93

1 OF 1

N/A

DRAWN BY: CHECKED BY: APPROVED BY: DATE:
PAGE:
SCALE:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSB-LX2685IW