



		1					
LOC	DIST	REVISIONS					
G	14	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D	REV PER ECR-10-007996	19APRIL2010	RC	TM

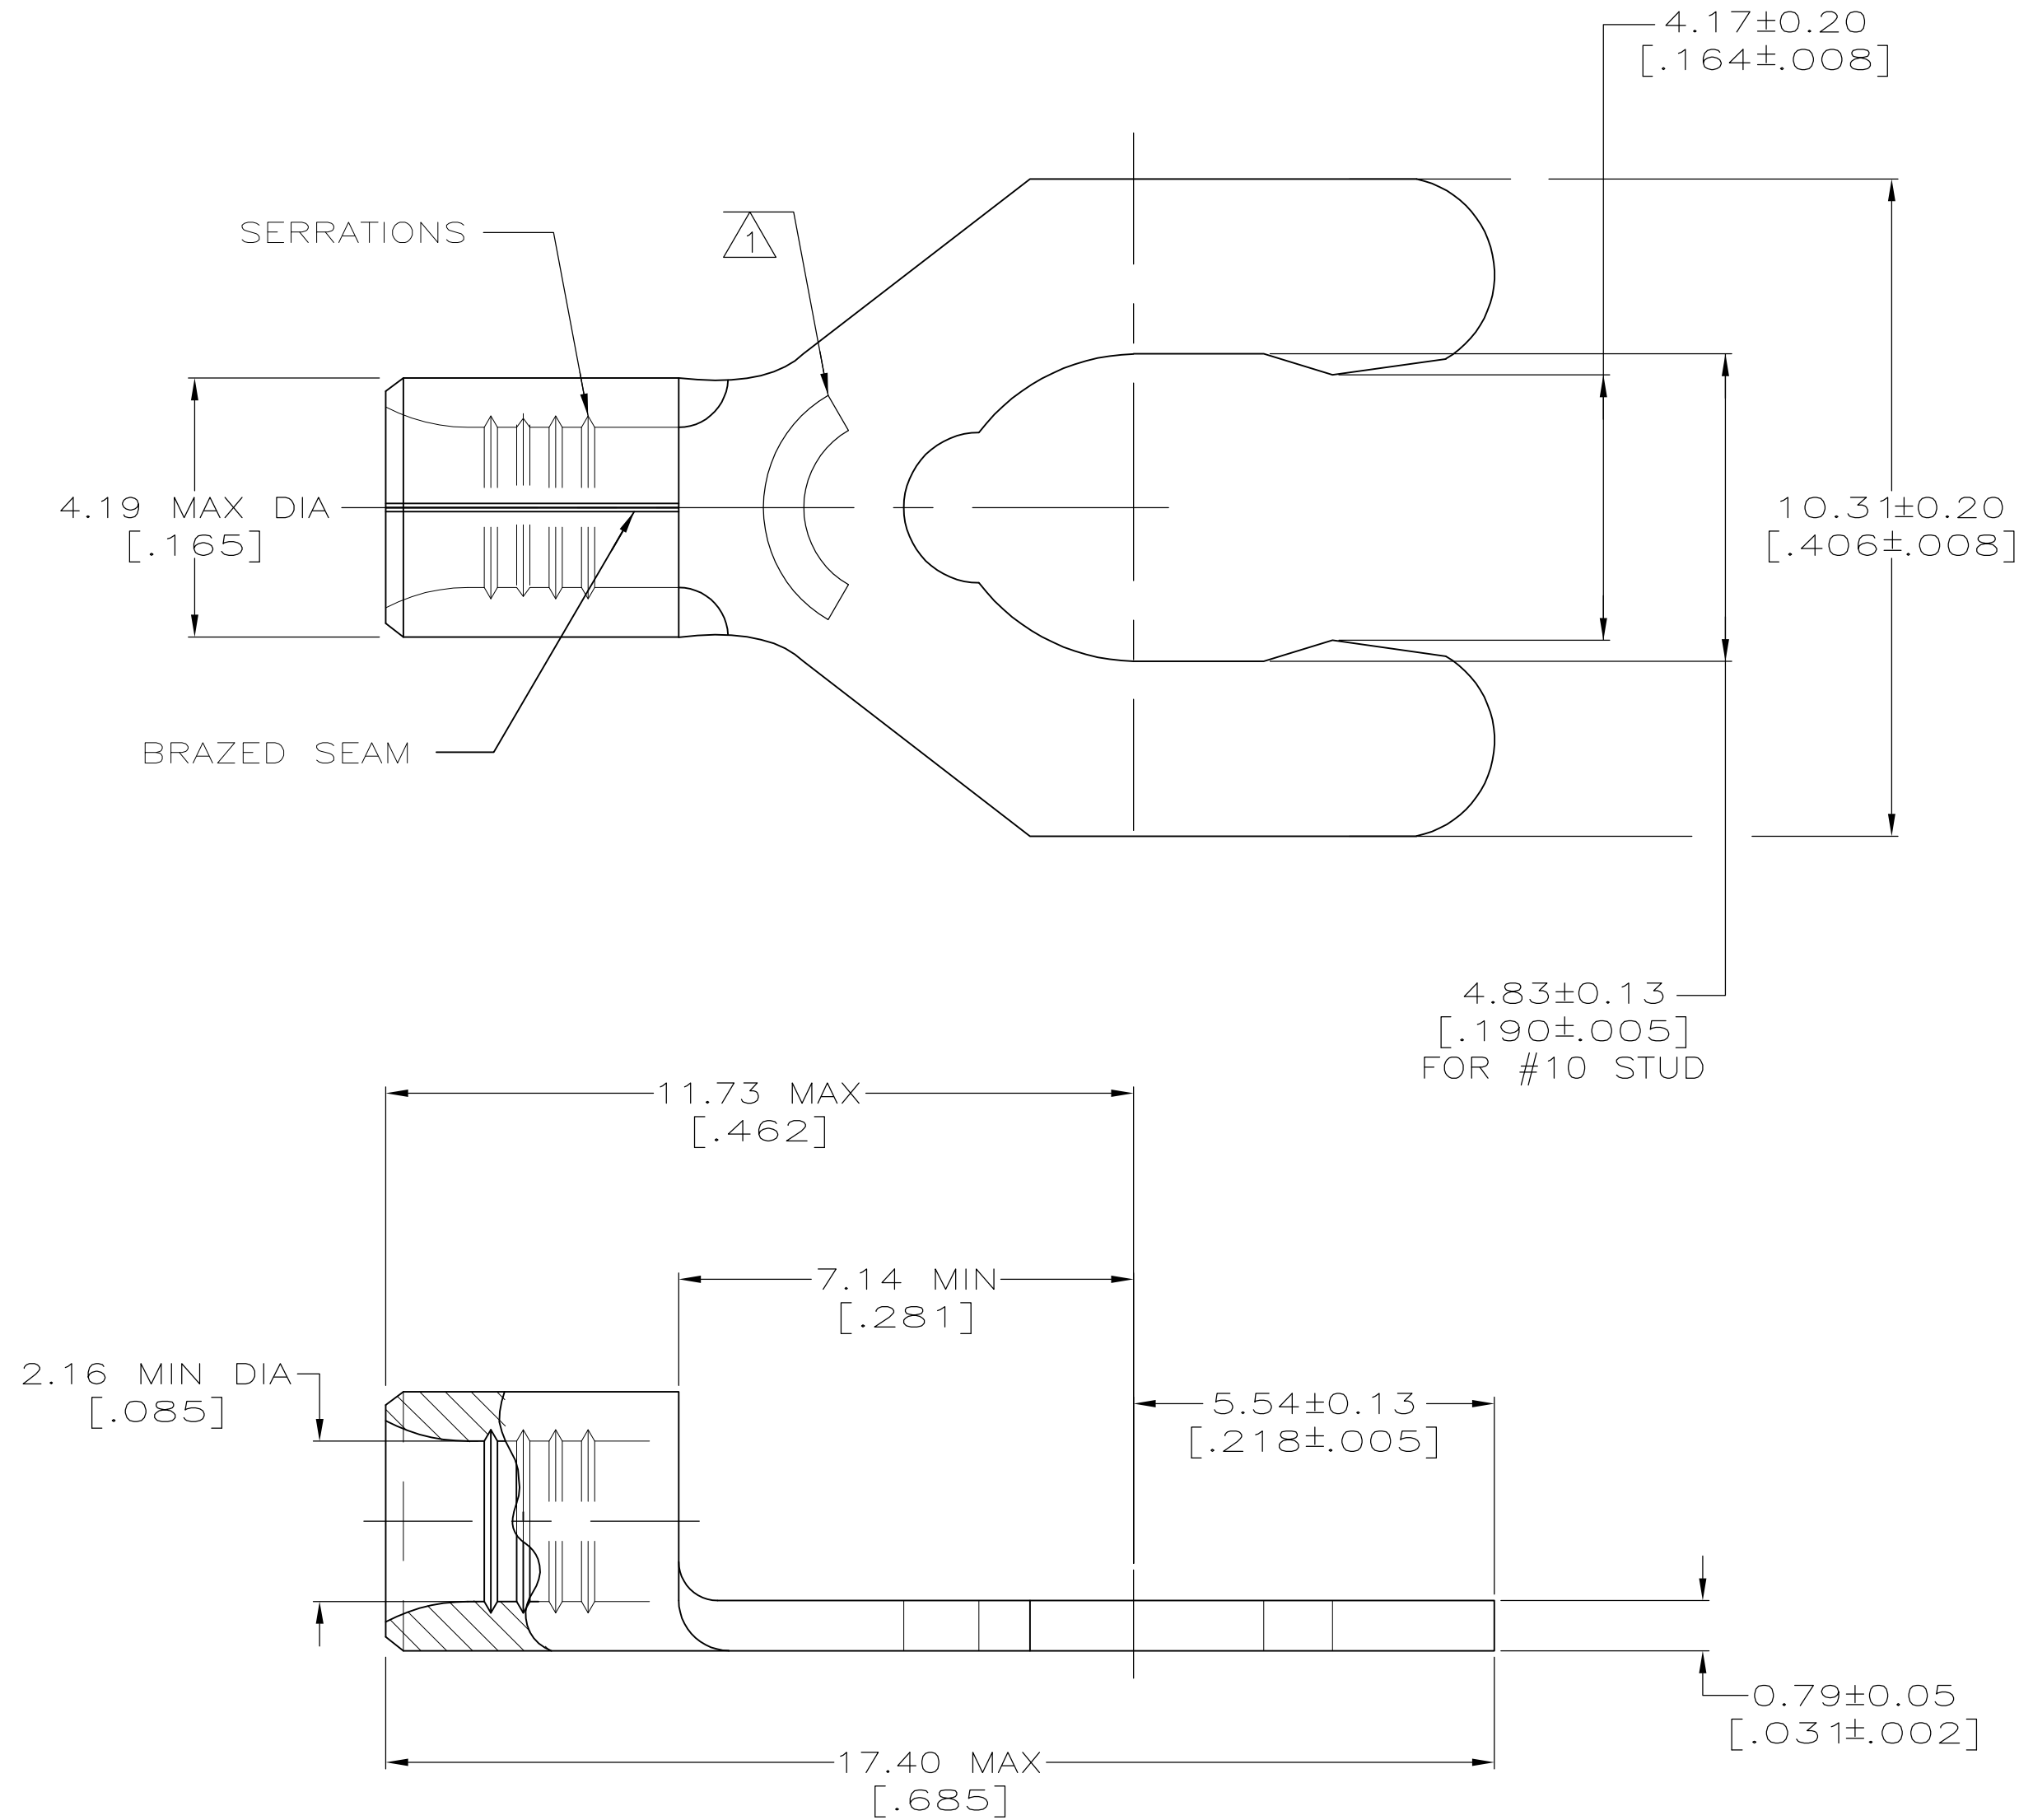

AMP WIRE RANGE	E13288 Listed	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- 1 STAMP 105 AMP 16 - 14* APPROX AS SHOWN
105 INDICATES STUD SIZE
- 2. RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
- 3. WIRE CROSS SECTIONAL AREA RANGE: 1.04-2.62mm²
[2,050-5,180 CIRCULAR MIL AREA] STRANDED
- 4 MATERIAL: COPPER PER ASTM B-152 ANNEALED
- 5 FINISH: TIN PLATE 0.00254 [.000100] MIN THK
PER ASTM-B545

100	LOOSE PIECE, BOX SPECIAL (NO WINDOW)	8-53125-5
100	LOOSE PIECE, BOX	8-53125-1
5000	ON TAPE	53125-2
1000	LOOSE PIECE	53125-1
QTY	PACKAGING TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 19APR2010	 Tyco Electronics Corporation Harrisburg, PA 17105-3608				
		CHK T.MICHIELUTI 19APRIL2010					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.PECHERKE 19APRIL2010	NAME				
	0 PLC ± -	PRODUCT SPEC	TERMINAL, SHORT SPRING SPADE SOLISTRAND				
	1 PLC ± -	—					
	2 PLC ± -	APPLICATION SPEC					
	3 PLC ± -	—					
	4 PLC ± -	—					
ANGLES ± -	WEIGHT —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL	FINISH	A2	00779	C=53125	—		
		CUSTOMER DRAWING			SCALE 10:1	SHEET 1 of 1	REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[53125-2](#)