

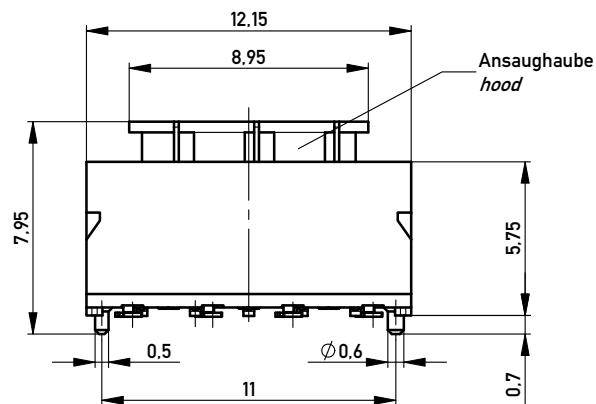




Verpackt in Gurtverpackung - Tape on Reel Packaging
Verpackungseinheit: 420 Stück - Packaging unit: 420 pcs



ohne Ansaughaube
without hood

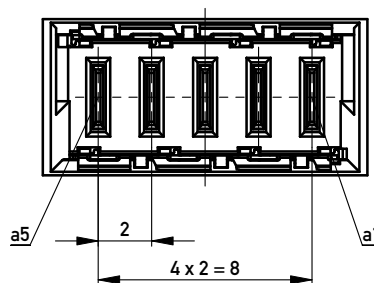

Leiterplatten-Layout Vorschlag / PCB-layout proposal

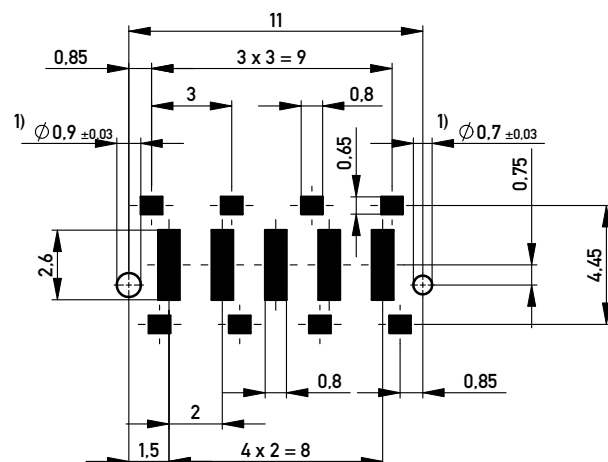


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Abspulrichtung - Reel off Direction

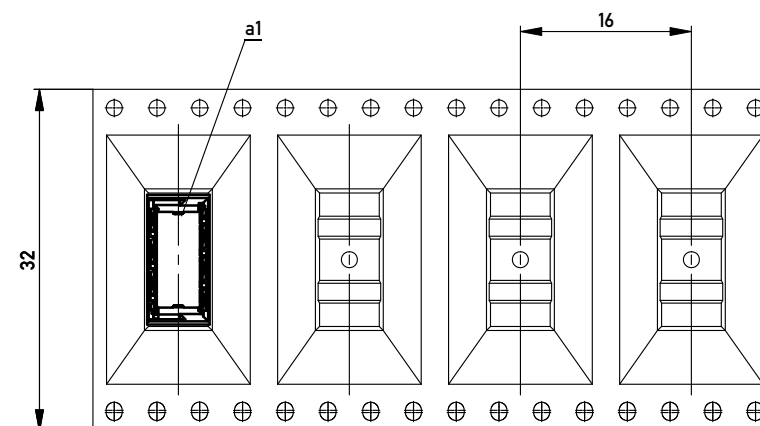

1) Durchmesser des Bohrers / Drill tool

Information:		Tolerances		Scale	5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
		 www.ERNI.com		Messerleiste SMD, Powerm. 2mm Male Con. SMD, Powerm. 2mm	
i	06.08.2010			214550	I
Index	Date			Class	A3
				MSPEED	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[214550](#)