

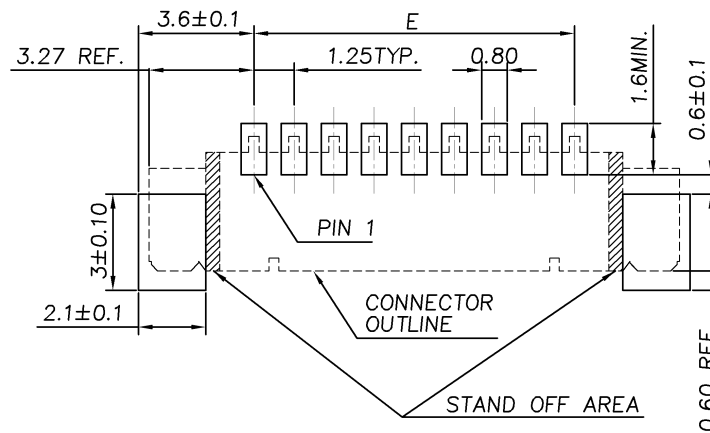




2 PIN

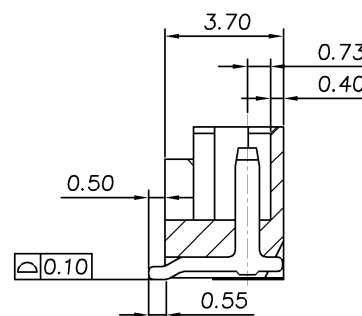

3 PIN

0.762um MIN. GOLD	17.50	18.60	19.30	20.50	24.04	15	4-1734260-5
	16.25	17.35	18.05	19.25	22.79	14	4-1734260-4
	15.00	16.10	16.80	18.00	21.54	13	4-1734260-3
	13.75	14.85	15.55	16.75	20.29	12	4-1734260-2
	12.50	13.60	14.30	15.50	19.04	11	4-1734260-1
	11.25	12.35	13.05	14.25	17.79	10	4-1734260-0
	10.00	11.10	11.80	13.00	16.54	9	3-1734260-9
	8.75	9.85	10.55	11.75	15.29	8	3-1734260-8
	7.50	8.60	9.30	10.50	14.04	7	3-1734260-7
	6.25	7.35	8.05	9.25	12.79	6	3-1734260-6
	5.00	6.10	6.80	8.00	11.54	5	3-1734260-5
	3.75	4.85	5.55	6.75	10.29	4	3-1734260-4
	2.50	3.60	4.30	5.50	9.04	3	3-1734260-3
	1.25	2.35	3.05	4.25	7.79	2	3-1734260-2
3.81um MIN. MATT--TIN	17.50	18.60	19.30	20.50	24.04	15	1-1734260-5
	16.25	17.35	18.05	19.25	22.79	14	1-1734260-4
	15.00	16.10	16.80	18.00	21.54	13	1-1734260-3
	13.75	14.85	15.55	16.75	20.29	12	1-1734260-2
	12.50	13.60	14.30	15.50	19.04	11	1-1734260-1
	11.25	12.35	13.05	14.25	17.79	10	1-1734260-0
	10.00	11.10	11.80	13.00	16.54	9	1734260-9
	8.75	9.85	10.55	11.75	15.29	8	1734260-8
	7.50	8.60	9.30	10.50	14.04	7	1734260-7
	6.25	7.35	8.05	9.25	12.79	6	1734260-6
	5.00	6.10	6.80	8.00	11.54	5	1734260-5
	3.75	4.85	5.55	6.75	10.29	4	1734260-4
	2.50	3.60	4.30	5.50	9.04	3	1734260-3
	1.25	2.35	3.05	4.25	7.79	2	1734260-2
PLATING	E	D	C	B	A	NO. OF CONTACTS	PART NUMBER
	DIMENSION						

TE Connectivity

WIRE TO BOARD MALE HEADER,
1.25MM PITCH, SMT STRAIGHT TYPE.

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734260	—

SCALE	SHEET	REV
—	1 OF 2	A

1. MATERIAL:
HOUSING: HIGH TEMP. THERMOPLASTIC, UL 94V-0, COLOR: NATURAL.
CONTACTS: PHOSPHOR BRONZE.
TAB: PHOSPHOR BRONZE.

2. FINISH:
CONTACTS: (SEE TABLE) OVER 50μ" MIN. NICKEL PLATED.
TAB: 100μ" MIN. MATTE-TIN OVER 50μ" MIN. NICKEL PLATED.

3. NO TE LOGO AND DATE CODE ON THE PRODUCT.

4. LOCKING WINDOW:
ONE PLACE FOR 2 AND 3 CONTACTS,
TWO PLACES FOR MORE THAN 3 CONTACTS.

5. RECOMMENDED PART NUMBER OF CABLE ASSEMBLY:
HOUSING: X-440146-X
CONTACT: 440147-X

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN	29APR200
-----	----------

A. WU

CHK 29APR200

3. HOU	
APVD	29APR200

W.J. KE

PRODUCT SPEC	
--------------	--

108-57499

APPLICATION SPEC

Age Group	Percentage
15-19	10
20-24	25
25-29	45
30-34	65
35-39	80
40-44	90
45-49	95
50-54	98
55-59	100
60-64	100

WEIGHT	SEE TABLE
--------	-----------

SEE TABLE

CUSTOMER DRAWING

DIMENSIONS:
MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	$\pm -$
1 PLC	$\pm -$
2 PLC	± 0.2
3 PLC	$\pm -$
4 PLC	$\pm -$
ANGLES	$+ -$

MATERIAL	FINISH
SEE NOTE	SEE NOTE

D

C

B



A

D

C

B

A

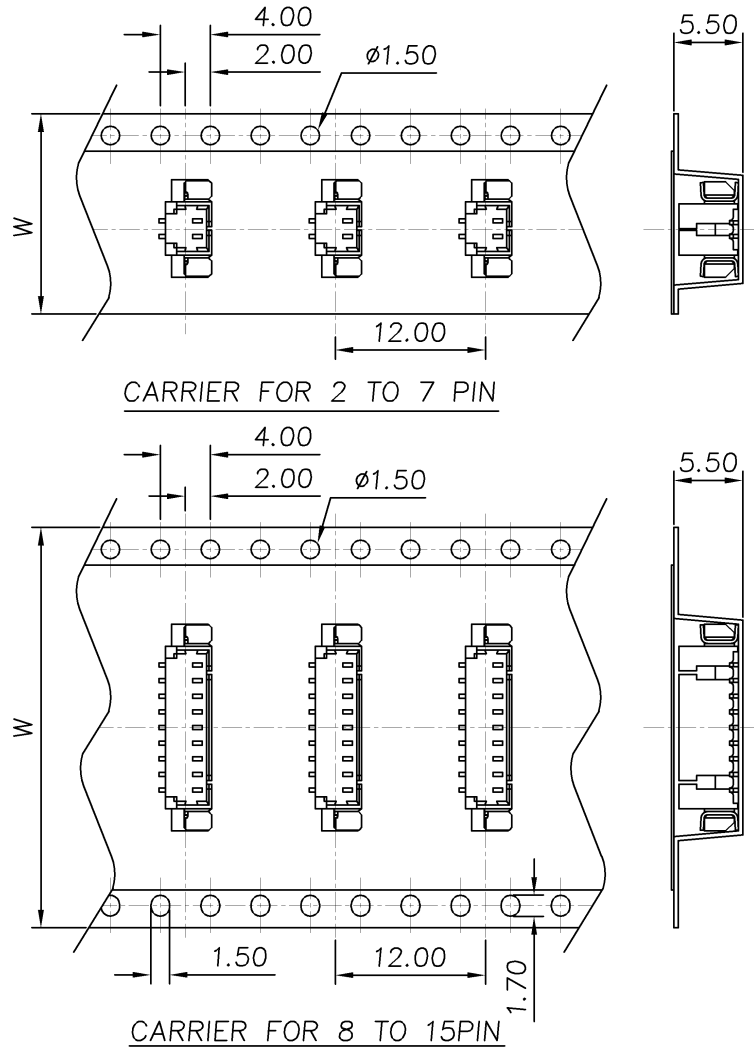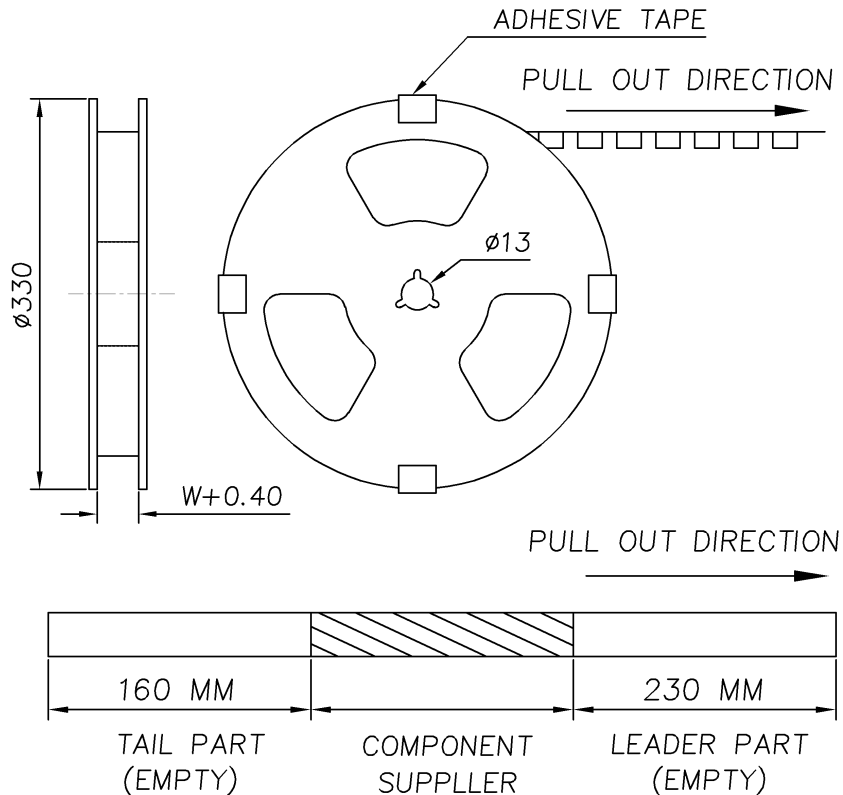

NOTE:
1. CARTON DIMENSIONS: 340 X 340 X 250

1000/REEL	4000	44.0	15
			14
			13
	6000	32.0	12
			11
			10
			9
			8
	7000	24.0	7
			6
			5
			4
	10000	16.0	3
			2
PACKING	QUANTITY	DIM W	NO. OF PIN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH
-

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

WIRE TO BOARD MALE HEADER,
1.25MM PITCH, SMT STRAIGHT TYPE.

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=1734260

RESTRICTED TO
-

SCALE
-

SHEET
2 OF 2

REV
A

AMP 1470-19 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1734260-2](#)