

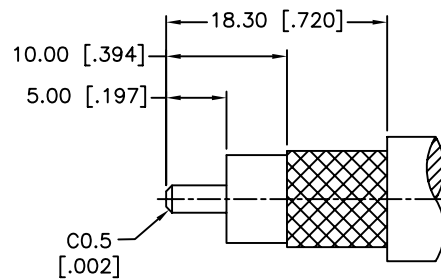
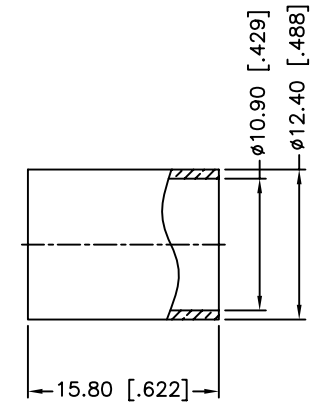


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/15/99	XXXX	INITIAL RELEASE
A	08/20/12	2361	UPDATE DRAWING FORMAT

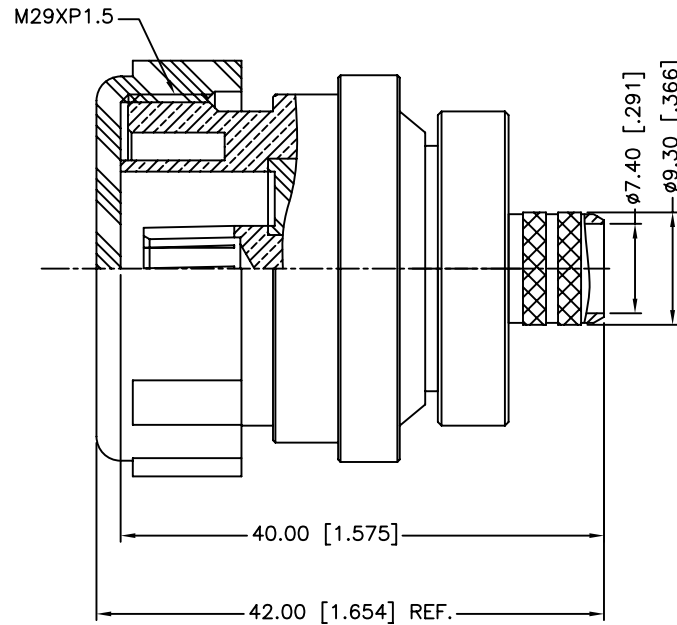

RECOMMENDED
CABLE STRIPPING DIM'S

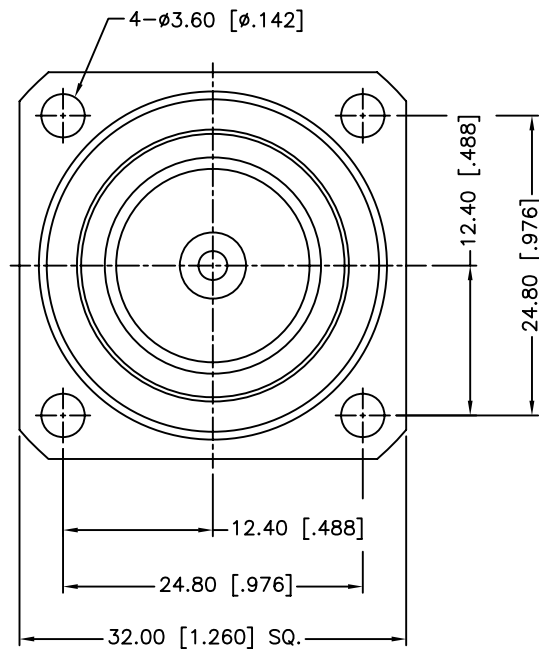

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-6 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 2300 VRMS
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C to +165°C
6. CRIMPED FERRULE
HEX CRIMP SIZE .429"

	DESCRIPTION	MATERIAL	FINISH	QTY
7	FERRULE	BRASS	NEXCOTE	1
6	COVER	PE	BLUE	1
5	BODY	BRASS	NEXCOTE	1
4	GASKET	SILICON RUBBER	RED	1
3	CONTACT PIN	BERYLLIUM COPPER	SILVER	1
2	INSULATOR	PTFE	NATURAL	1
1	BARREL	BRASS	NEXCOTE	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN S.LI	08/20/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/272123.DWG

Amphenol Connex			
PART DESCRIPTION 7/16 PANEL CRIMP JACK (FOR B9913,LMR400 CABLE)			
PART NO. 272123			
DWG. NO.	272123.DWG	REV.	A
SIZE	A	SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[272123](#)