
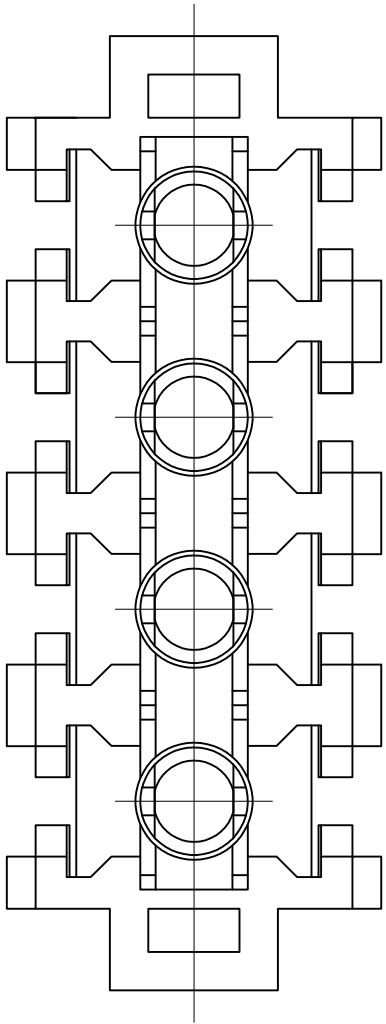
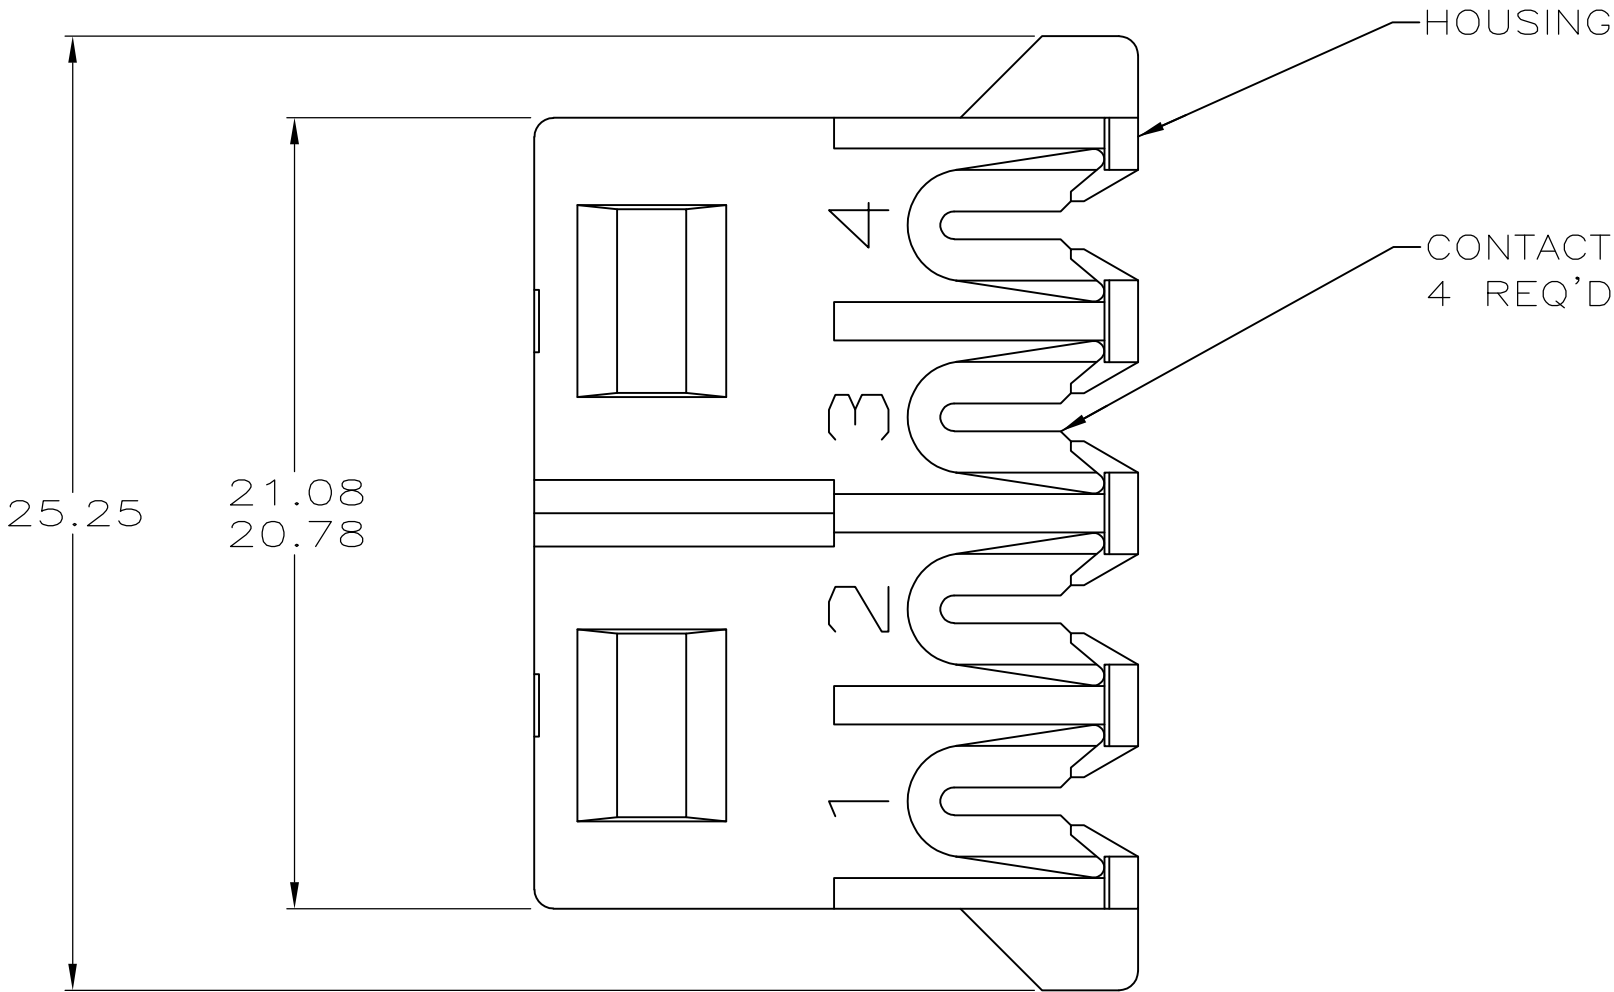


D

C

B

A

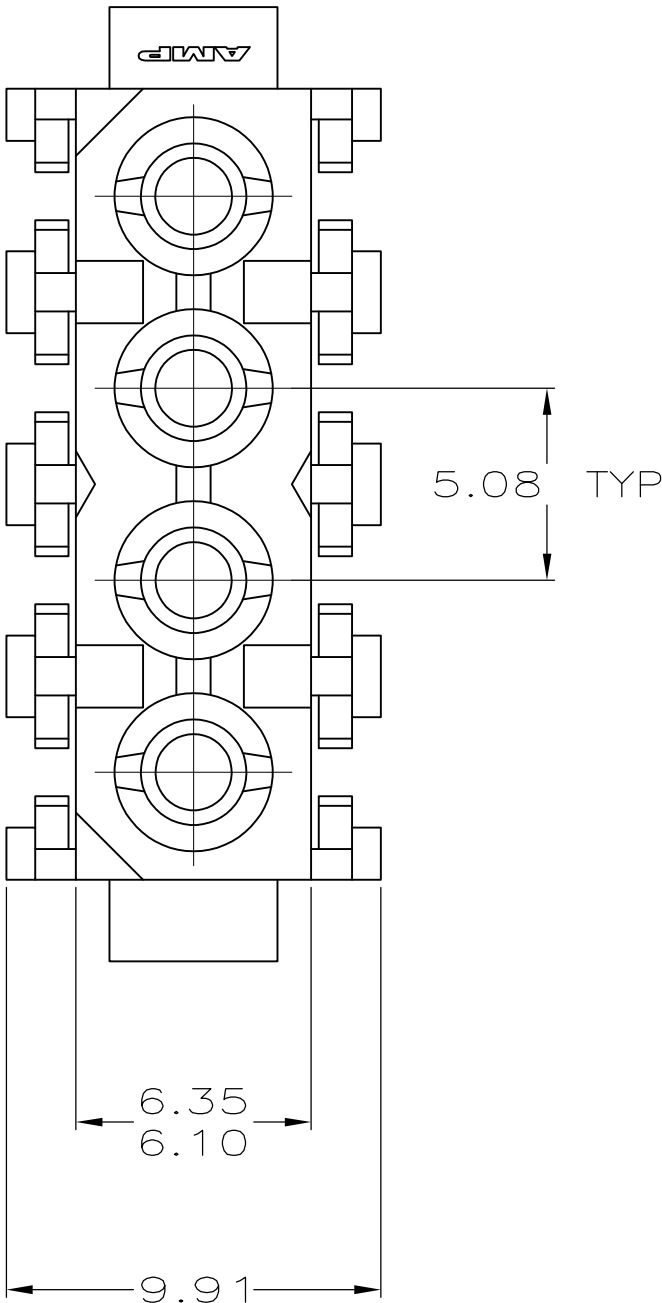


D

C

B

A

- NOTE DELETED.
2. INSULATION DIAMETER 2.41[.095] MAX.

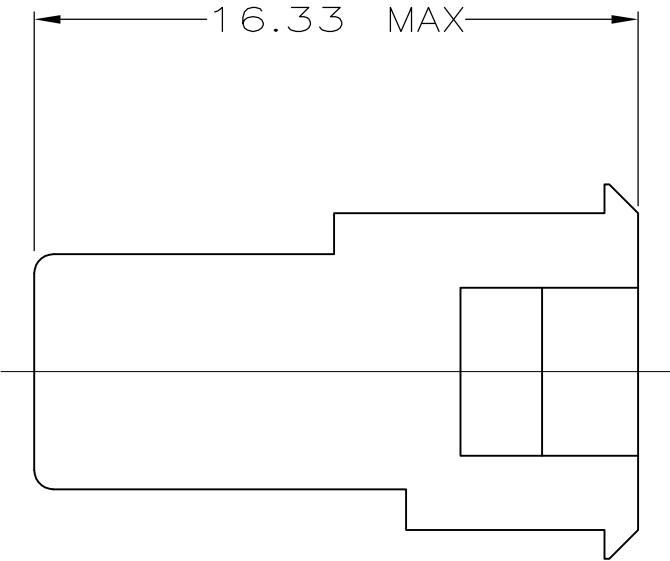

BLUE	1.25 mm ² (16 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-5
YELLOW	0.5 mm ² (20 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-4
ORANGE	0.8 mm ² (18 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-3
RED	0.3 mm ² (22 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-2
COLOR	WIRE SIZE	CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NO

9.91	.390	-	-
6.35	.250	25.25	.994
6.10	.240	21.08	.830
5.08	.200	20.78	.818
0.13	.005	16.33	.643
MM	IN	MM	IN
CONVERSION TABLE			

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.13
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH
SEE TABLE

DWN
K. WHITAKER
CHK
R. SWING
APVD
-
PRODUCT SPEC
-
APPLICATION SPEC
-
WEIGHT
-

2-10-94
2-10-94
-
-
-
-
-

TE Connectivity

PLUG ASSEMBLY,
INSULATION DISPLACEMENT,
COMMERCIAL MATE-N-LOK(TM)

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-770156

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
5:1

SHEET
1 OF 1

REV
F1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[770156-4](#)