

LOC	DIST	REVISIONS				
CM	53	P	LTR	DESCRIPTION	DATE	DWN
		AA		REVISED PER ECR-16-002894	24MAR2016	BW
						APVD

- 1







PLATED WITH 0.00076 [.000030] GOLD,
OVER 0.00127 [.000050] NICKEL UNDERPLATE.
- 2

PLATED INTERNALLY WITH 0.00076 [.000030] GOLD.
- 3

DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4

PRELIMINARY, NOT FOR PRODUCTION.
- 5

INSULATION RANGE: 1.52-3.30 [.060-.130] DIA.

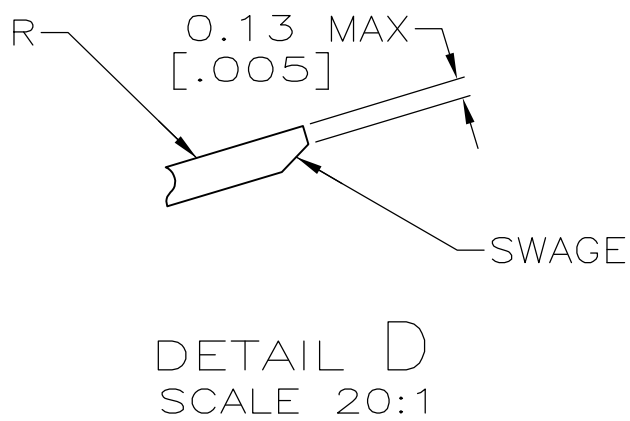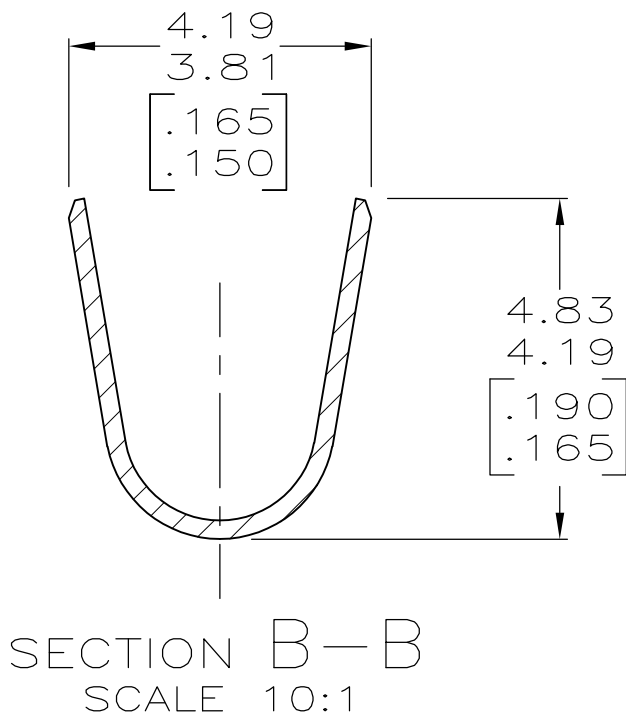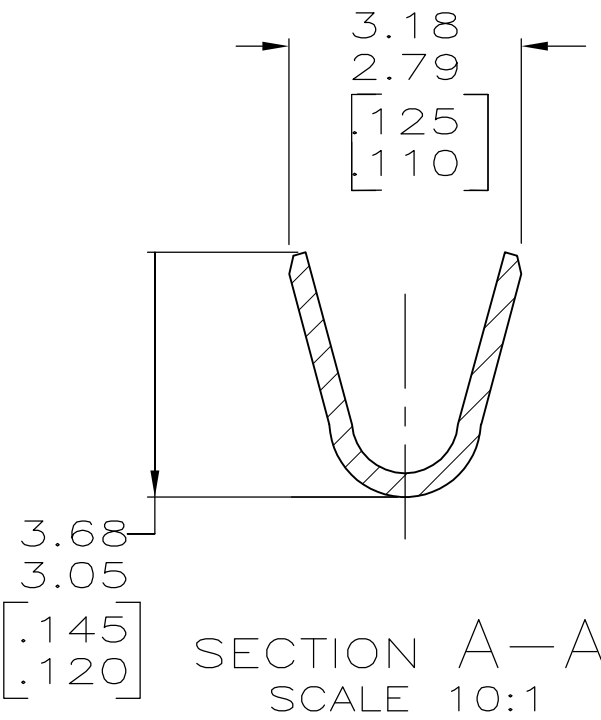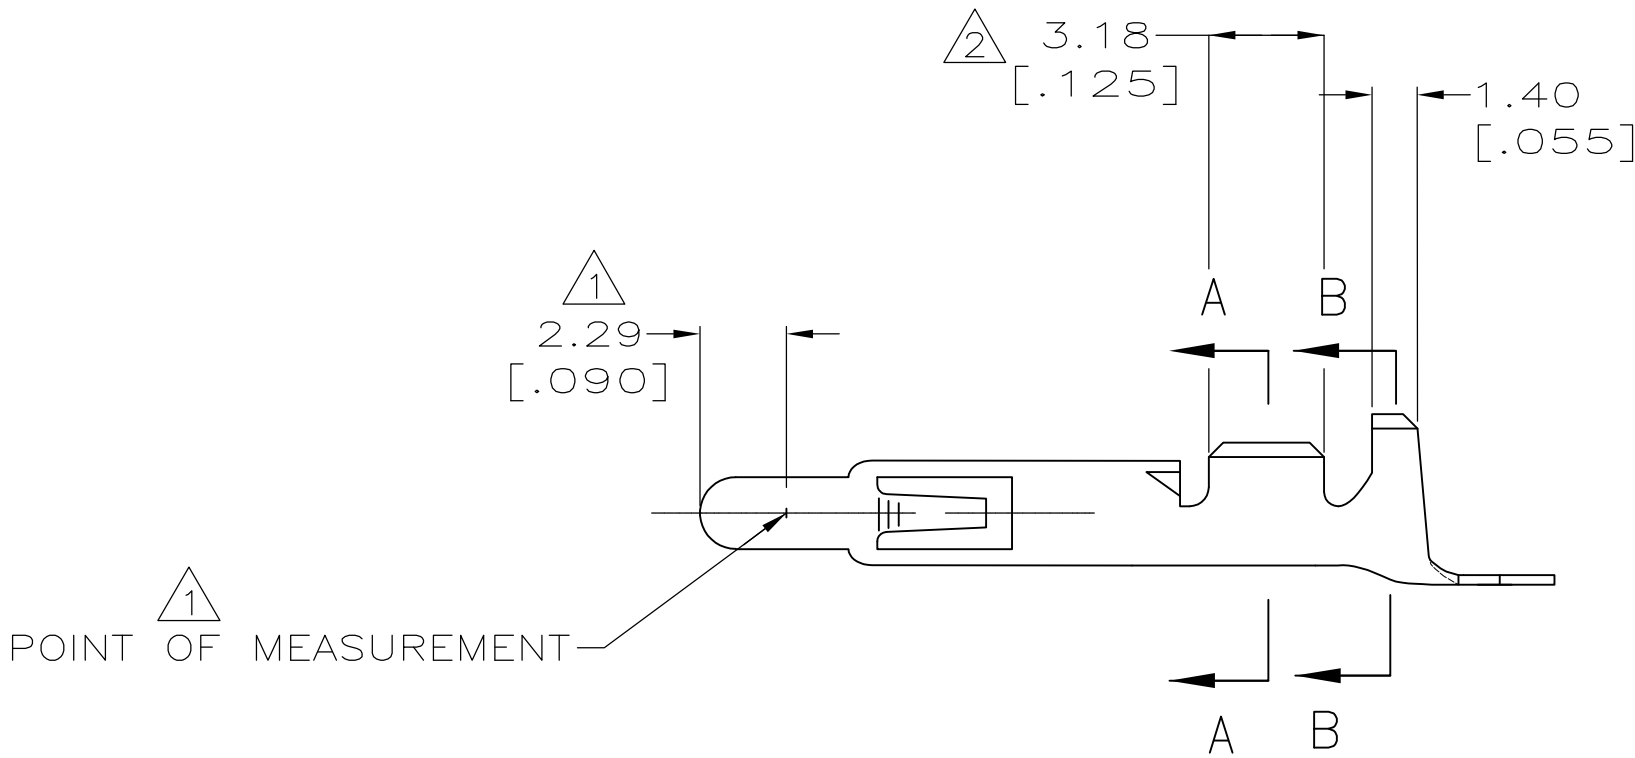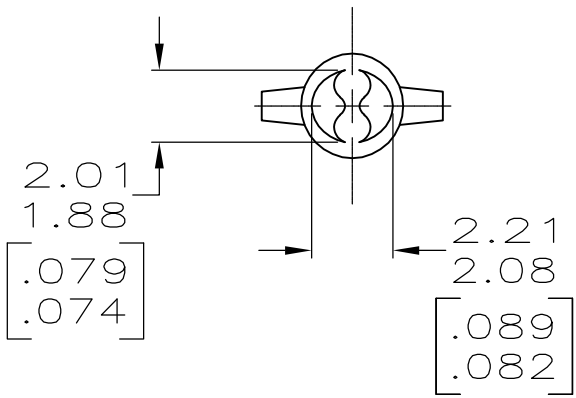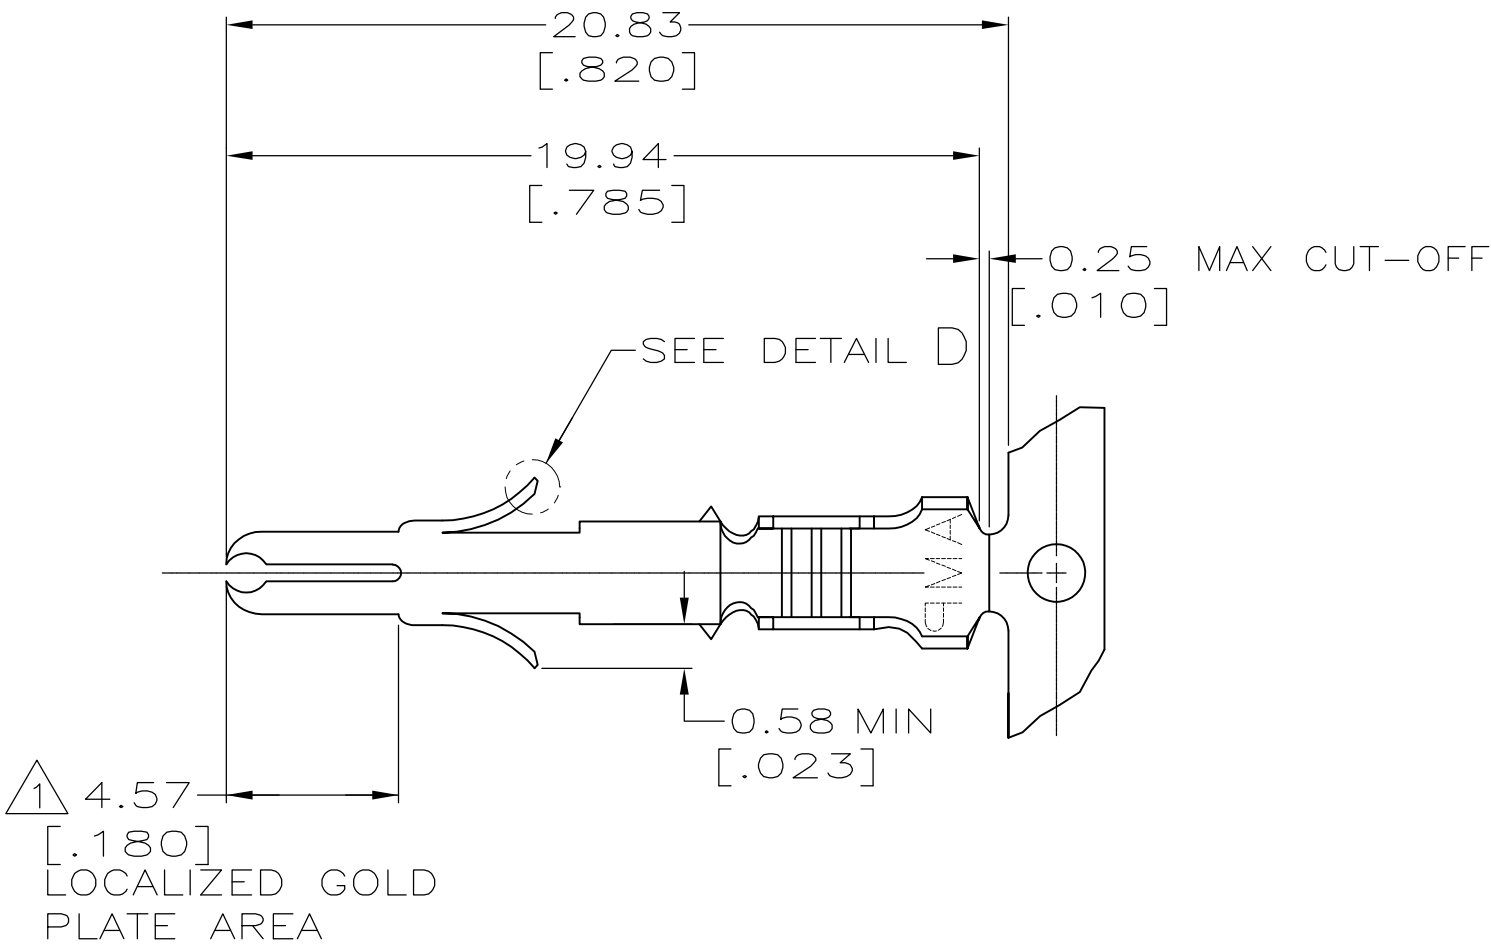

4	-	0.31 [.012] BE CU	PRE-TIN	350687-9
	350705-7	0.31 [.012] BRASS	GOLD 1	350687-7
4	-	0.31 [.012] PH BRZ	GOLD 1	350687-5
	350705-2	0.31 [.012] BRASS	GOLD 1/2	350687-2
	350705-1	0.31 [.012] BRASS	PRE-TIN	350687-1
LOOSE PIECE (REF)		MATERIAL	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12-MAY-2000	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK K. COBLE 12-MAY-2000			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 12-MAY-2000	NAME		
0 PLC ± -		PRODUCT SPEC	PIN,		
1 PLC ± -		APPLICATION SPEC	UNIVERSAL MATE-N-LOK™		
2 PLC ± 0.13 [.005]			SIZE	CAGE CODE	DRAWING NO
3 PLC ± -			A2	00779	C=350687
4 PLC ± -			RESTRICTED TO		
ANGLES ± 0° 30'		WEIGHT	REV		
FINISH		CUSTOMER DRAWING	SCALE	SHEET	1 OF 1
WIRE RANGE			5:1	1	AA
20-14 AWG					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350687-5](#)