

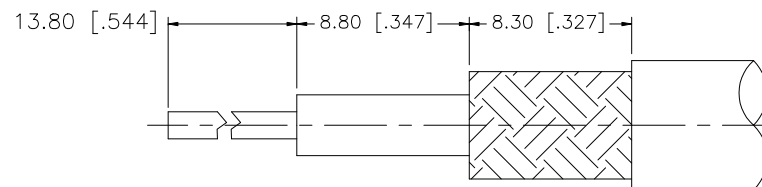


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/17/02	—	INITIAL RELEASE
A	03/16/09	—	REVISE PART DESCRIPTION, ADD NOTE 1.

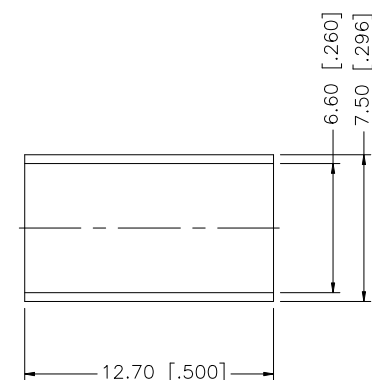

RECOMMENDED CABLE  
STRIPPING DIM'S

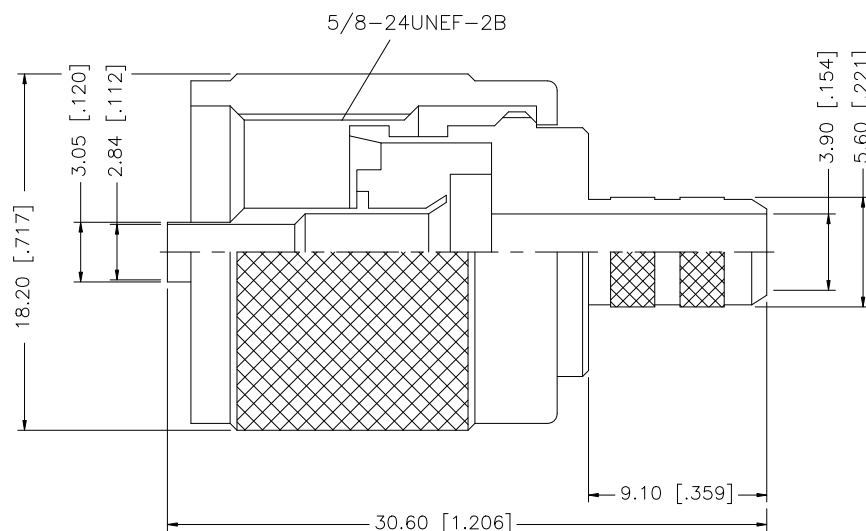

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48]

					<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</div> <div>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm</div> <div>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”</div> <div>DO NOT SCALE DRAWING</div>	APPROVALS		DATE		<div>Amphenol Connex</div>								
8						DRAWN	GRS	03/16/09										
7						CHECKED			PART DESCRIPTION <div>UHF CRIMP PLUG (FOR RG-59/U CABLE)</div>									
6						ISSUED												
5						SHEET	1 OF 1											
4	FERRULE	COPPER	NICKEL	1		PART NO. <div>182101</div>												
3	CONTACT PIN	BER. COPPER	GOLD	1														
2	INSULATOR	PHENOLIC	YELLOW	1														
1	BODY/SHELL	BRASS	NICKEL	1		DWG. NO. 182101.DWG					REV. A	SIZE A	SCALE NA					
	DESCRIPTION	MATERIAL	FINISH	QTY														

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[182101](#)