
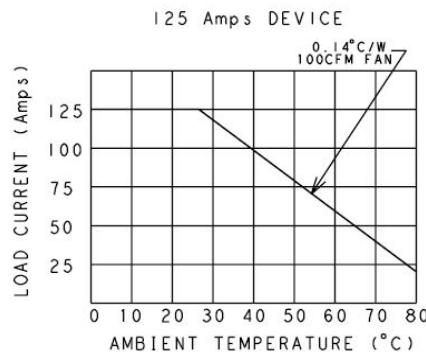
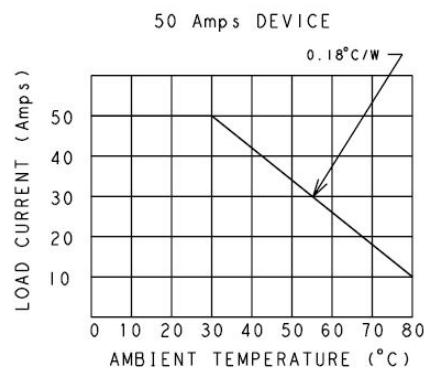
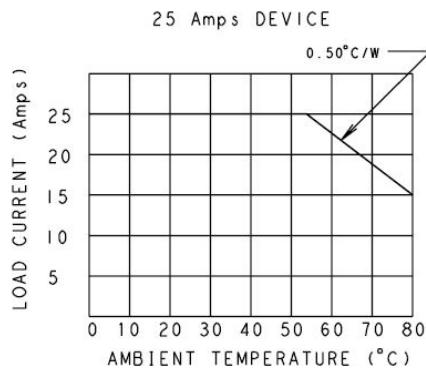


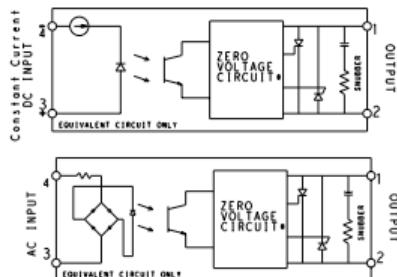


**SSR Series (Continued)**
**Output Specifications (@ 25° C, unless otherwise specified)**

Parameter	Nom. Line Voltage	Conditions	Units	25A Models	50A Models	125A Models
Load Voltage Range VL	240V Model		V rms	24 - 280		
	480V Model		V rms		48 - 660	
Repetitive Blocking Voltage (Min.)	240V Model		V peak	600		
	480V Model		V peak		1200	
Load Current Range IL*	240 & 480V Models	Resistive	A rms	.1 - 25	.1 - 50	.1 - 125
Single Cycle Surge Current (Min.)	240 / 480V Models		A peak	300 / 400	520	1150
Leakage Current (Off-State) (Max.)	240V Model	f = 60 Hz. VL = 240V rms	mA rms		5	
	480V Model	f = 60 Hz. VL = 480V rms	mA rms		5	
On-State Voltage Drop (Max.)	240 & 480V Models	IL = Max.	Vrms	1.6	1.8	1.8
Static dv/dt (Off-State) (Min.)	240 / 480V Models		V/μs	300 / 500		1000
Thermal Resistance, Junction to Case (R <sub>θJ-C</sub> ) (Max.)	240 / 480V Models		°C/W	2.35 / 1.1	0.55	0.35
Turn-On Time (Max.)	240 & 480V Models	f = 60 / 50 Hz.	ms	8.3 for Zero Voltage Turn-On DC input types, 40 for Zero Voltage Turn-On AC input types, 0.1 for Random Voltage Turn-On DC input types		
Turn-Off Time (Max.)	240 & 480V Models	f = 60 / 50 Hz.	ms	10 for zero voltage DC input types, 80 for AC input types, 8.3-Random(DC)		
I <sup>2</sup> T Rating	240 / 480V Models	t = 8.3 ms	A <sup>2</sup> Sec.	510 / 800	1350	6600
Load Power Factor Rating	240 & 480V Models	IL = Max.			0.5 - 1.0	

\* See Derating curve

**Electrical Characteristics (Thermal Derating Curves)**

**Operating Diagrams**

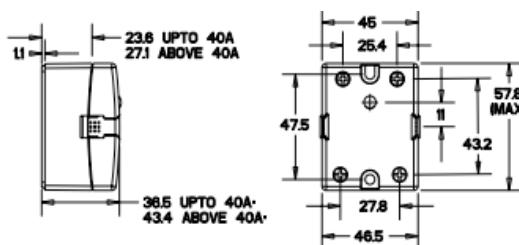
\* Random Turn-on Units have a Random Turn-on circuit instead of Zero Voltage Circuit

**Outline Dimensions**


\* Overall height dimensions includes with clear cover  
Dimensions in mm

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[SSR-480D125](#)