
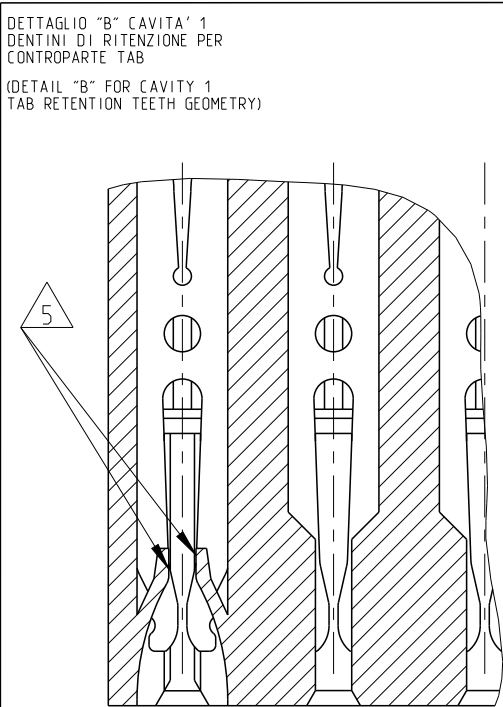
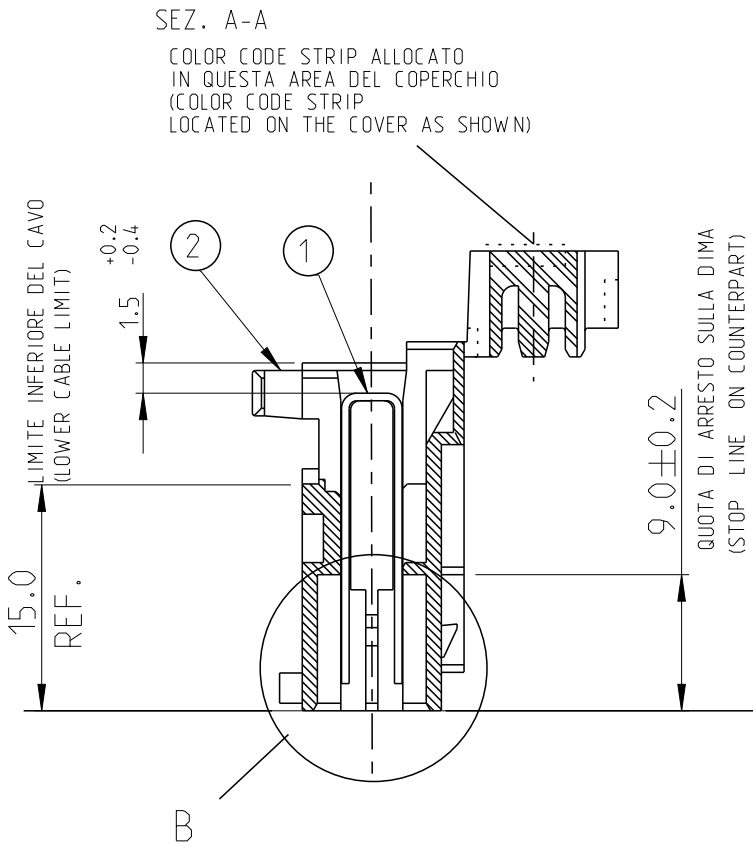
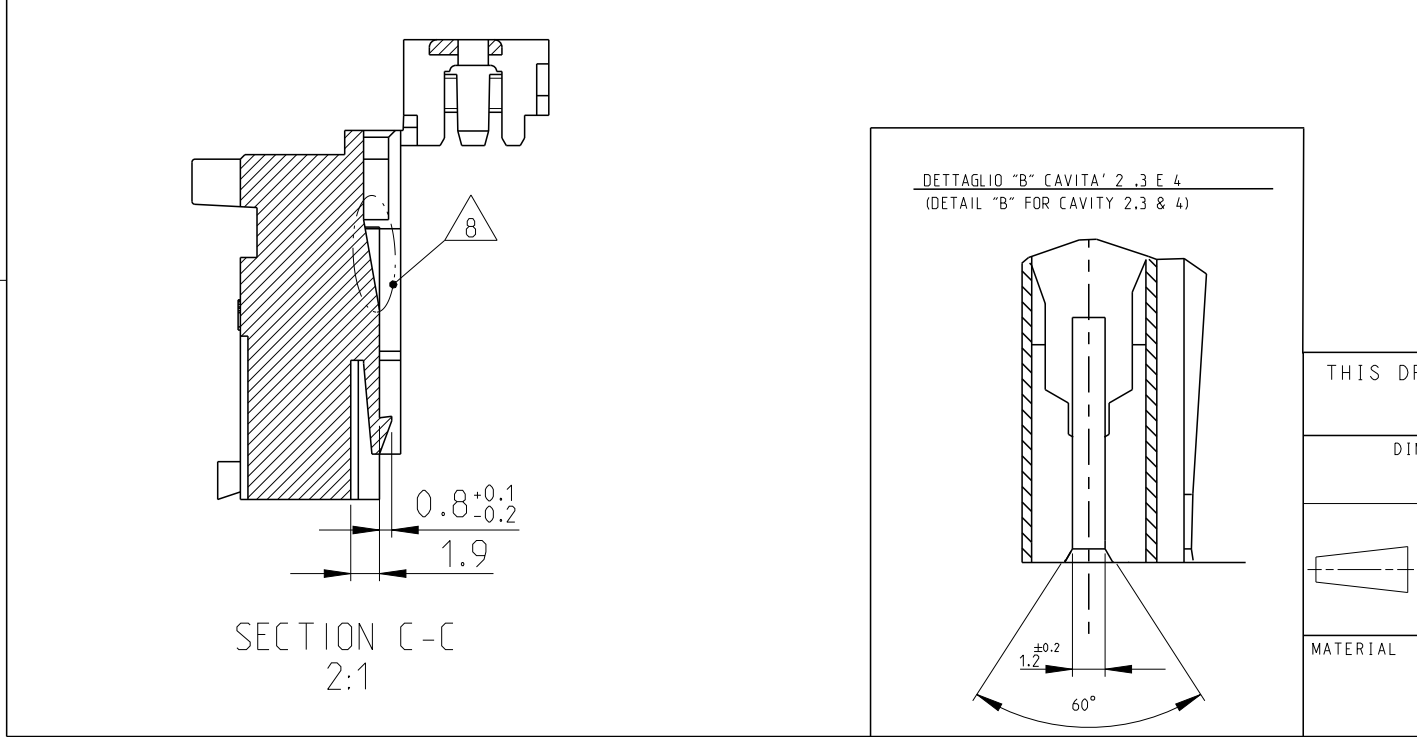
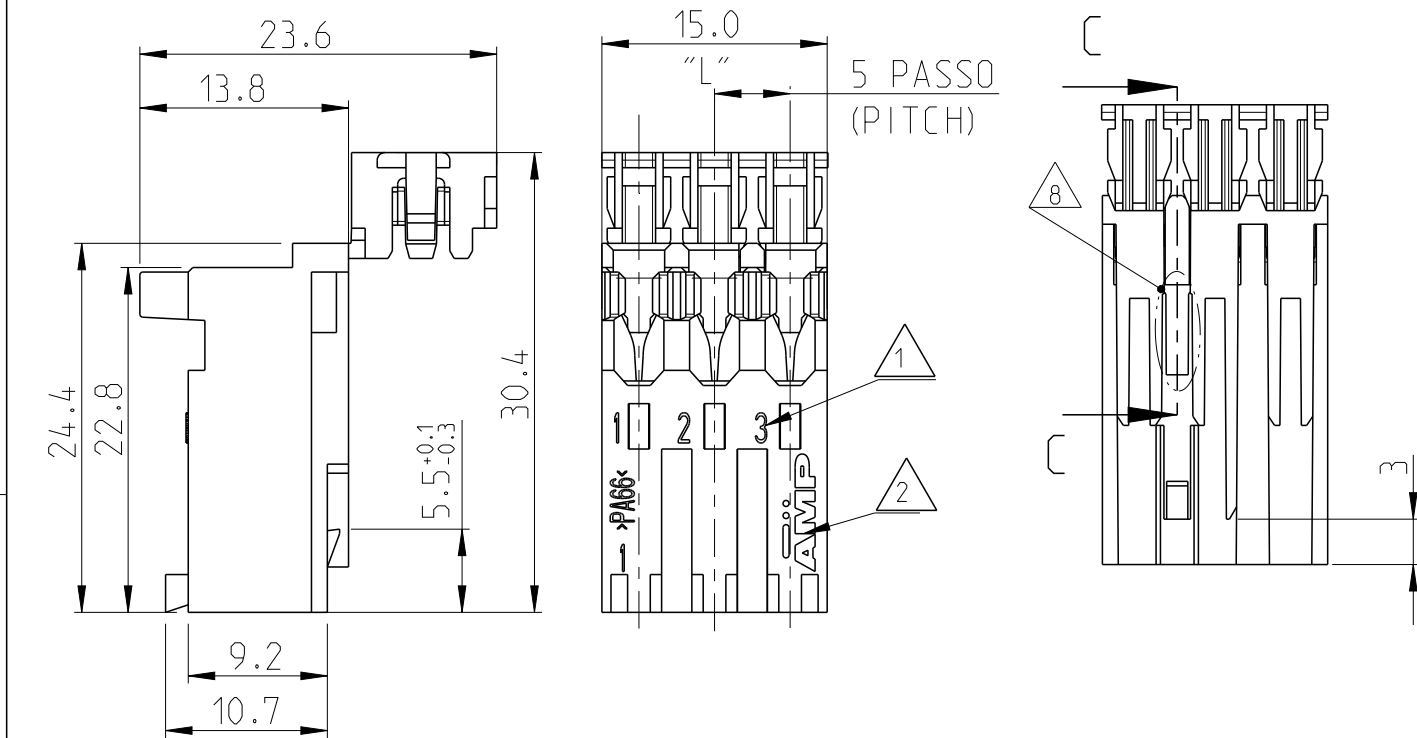


2		1				
LOC	DIST	REVISIONS				
1	-	P	LTR	DESCRIPTION	DATE	APVD
			B	GEOMERTY AT REAR LOCK AREA MODIFIED. SEE NOTE 8. (ECR-11-015181)	22JUL2011	DMK
			C	REVISED AS PER ECR-12-014300	16AUG2012	MKD
			D	REVISED AS PER ECR-13-013113	20AUG2013	MKD
			D1	ECR-15-016708	13NOV2015	FL

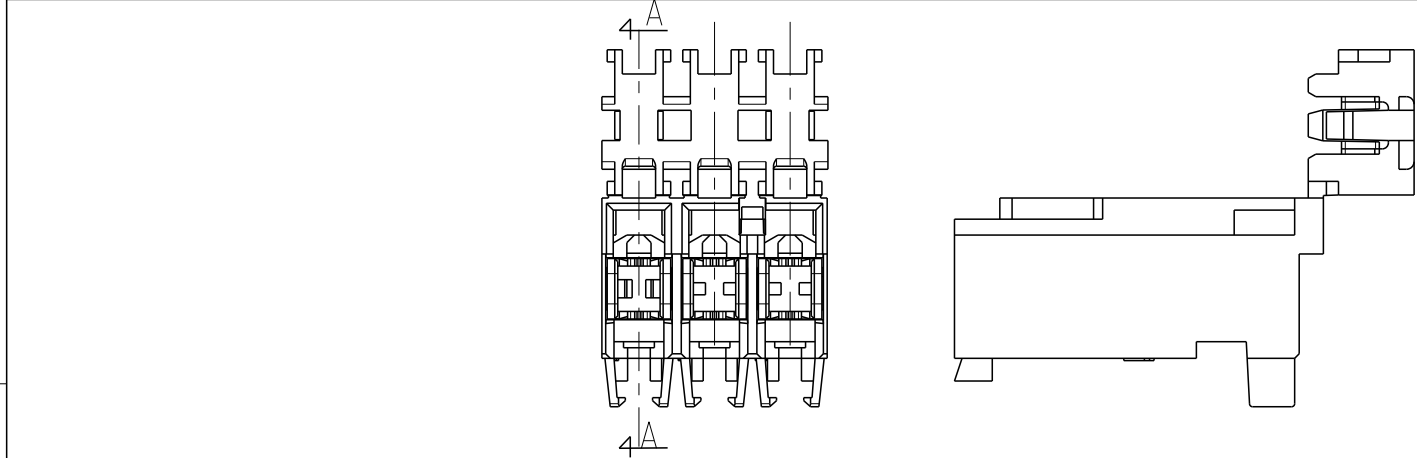

2	BLOCCETTO (HOUSING)	NATURALE (NATURAL)	PA 6.6 CARICATO VETRO (POLIAMIDE 6.6 GLASSFIBER FILLED)
1	CONTATTO (CONTACT)	STAGNATO (TIN-PLATED)	OTTONE (BRASS)
ITEM	DENOMINAZIONE (DESCRIPTION)	FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)
			DIAM. ISOLANTE (INS. DIA. RANGE) 3.0 max.
			RANGO FILO (WIRE RANGE) 0.5-1.5mm2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.CORDOLA 02DEC2008	 TE Connectivity			
DIMENSIONS: mm		CHK G.TURCO 02DEC2008				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME MONO SHAPE MK I TAB SPECIAL 2-8 POS REAR LOCKING			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0° 30' FINISH		PRODUCT SPEC 108-20065-1 108-20065-2	SIZE A3			
MATERIAL SEE TABLE		APPLICATION SPEC 114-20016 114-20016-1	CAGE CODE 00779			
		WEIGHT -	DRAWING NO C-293491			
		CUSTOMER DRAWING	SCALE 2:1			
			SHEET 1 OF 3			
			REV D1			

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2008

© COPYRIGHT 2008

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

NUMERO DI VIE	CONFIGURAZIONE (Vista connettore dall'alto)	VERSIONE PEZZI IN VASSOIO	PART REV.	VERSIONE PEZZI SCIOITI	PART REV	POSIZIONE AGGANCIO (LATO POSTERIORE)	POSIZIONE POLARIZZAZIONE (LATO POSTERIORE) (SE PRESENTE)	L +0.2 -0.3 (mm)	NOTE MARCHIATURA CON BANDA COLORATA
NO OF POS	CONFIGURATION (View from top side)	TRAY PACKAGING VERSION		LOOSE PIECES PACKAGING VERSION		LOCKING POSITION (Back side)	POSITION FOR POLARIZATION ON BACK SIDE (IF PRESENT)		NOTE STRIP COLOUR
2		0-293491-2	D	-	-	1-2	1S-2D	9.9	-
		1-293491-2	D	-	-	1-2	1S	9.9	-
		2-293491-2	D	-	-	1-2	-	9.9	-
3		0-293491-3	D	-	-	2-3	2S	14.9	-
3		1-293491-3	D	-	-	1-2	1S-2D	14.9	BLACK
4		0-293491-4	D	-	-	1-2, 3-4	1S,2D,3S	19.9	-
8		0-293491-8	D	-	-	1-2, 7-8	2D,3S,6D,7S	39.9	-

SCALE 2:1
VISTA LATO ALTO
(TOP SIDE VIEW)

POSIZIONE BANDA COLORATA
(COLOR STRIP AREA)

AGGANCIO POSTERIORE
(REAR LOCKING LANCE)
BETWEEN WAYS 2-3

POLARIZATION RIB
POSITION 2S AS SHOWN

NUMERO DELLA VIA
(WAY NUMBERING)

SCALE 2:1

CODIFICHE ASPORTABILI
(REMOVABLE CODIFICATION)

NOTE/NOTES:

1

NUMERI DI IDENTIFICAZIONE CAVITA'.
(CIRCUIT IDENTIFICATION)

2

MARCHIO DI FABBRICA (LIBERA POSIZIONE).
(TRADE MARK LOGO FREE POSITION)

3

L'AGGANCIO PER LINGUETTA E' POSIZIONATO SOLO NELLA CAVITA' N 1 °VEDI ANCHE NOTA 5
(RETENTION TOOTH IT IS LOCATED ON THE CAVITY N.1 SEE ALSO NOTE 5)

4

DIVENTA 6.5 PER LA CAVITA' N. 1 SUI CONNETTORI
(BECOMES 6.5. FOR THE CAVITY N.1)

5

GEOMETRIA ALTERNATIVA E OPZIONALE DEL DENTINO DI AGGANCIO
(ALTERNATIVE AND OPTIONAL SHAPE FOR RETENTION TOOTH)

6

STATO DI FORNITURA: CONFEZIONAMENTO IN "VASSOI + SCATOLA"
(PACKAGING: "ON TRAY PLUS CARTON BOX")

7

PRELIMINARY- PART NOT YEST RELEASED FOR PRODUCTION

8

SLIDE PROFILE (WEDGE SHAPE SLOT) ON THE AREA ABOVE THE LOCKING LANCE GEOMERTY TO FACILITATE UN-CHAINING PROCESS.

9

DIFFERENT CODING RIB GEOMETRY AT BOTH END.
WIDTH OF CODING RIB REDUCED TO 1.1 mm FOR ALL REAR LOCKING VERSIONS

PEZZO FORNITO AGGANCIATO IN STICK
(CONNECTORS STACKED IN STRIP)

FROM 11.4 TO 12.4
PASSO (PITCH)

CONNETTORE CHIUSO AGGRAFFATO
(TERMINATED CONNEGTOR)

24.5 MAX.

7.8 +0.1
-0.2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±

FINISH ±

±0.3

±0° 30'

MATERIAL SEE TABLE

FINISH SEE TABLE

SEE TABLE

DWN C.CORDOLA 02DEC2008

CHK G.TURCO 02DEC2008

APVD - -

PRODUCT SPEC 108-20065-1 108-20065-2

APPLICATION SPEC 114-20016 114-20016-1

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME MONO SHAPE MK I TAB SPECIAL 2-8 POS REAR LOCKING -

SIZE A3

CAGE CODE 00779

DRAWING NO ©-293491

RESTRICTED TO -

SCALE 2:1

SHEET 2 OF 3

REV D1

1470-19 (3/11)

LOC 	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1			

PA GF, UL-V0 GWEPT 750 °C NO FLAME, NATURAL

7 7 7 7 7	NO OF POS	CONFIGURATION (View from top side) ①	TRAY PACKAGING VERSION	PART REV	LOOSE PIECES PACKAGING VERSION	PART REV	LOCKING POSITION (Back side)	POSITION FOR POLARIZATION ON BACK SIDE (IF PRESENT)	L +0.2 -0.3 (mm)	NOTE STRIP COLOUR
	2		2297762-2	1	-	-	1-2	1S-2D	9.9	-
			1-2297762-2	1	-	-	1-2	1S	9.9	-
	3		2297762-3	1	-	-	1-2	1S-2D	14.9	-
	4		2297762-4	1	-	-	TBD	TBD	19.9	-
	8		2297762-8	1	-	-	TBD	TBD	39.9	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±0° 30'

FINISH SEE TABLE

DWN C.CORDOLA 02DEC2008

CHK G.TURCO 02DEC2008

APVD -

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME MONO SHAPE MK I TAB
SPECIAL 2-8 POS REAR LOCKING
-

SIZE A3

CAGE CODE 00779

DRAWING NO C-293491

RESTRICTED TO -

SCALE 2:1 SHEET 3 OF 3 REV D1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[293491-4](#) [293491-8](#)