

## Plug - SP-H 2,5/15 - 3210758

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug, Connection method: Spring-cage connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

The figure shows the 6-pos. version

### Product Features

- Large-surface labeling option
- Practical coding option
- Tested for railway applications



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Minimum order quantity               | 10 pc    |
| Weight per Piece (excluding packing) | 44.0 g   |
| Custom tariff number                 | 85366990 |
| Country of origin                    | Poland   |

### Technical data

#### General

|                                        |                                                           |
|----------------------------------------|-----------------------------------------------------------|
| Number of levels                       | 1                                                         |
| Number of connections                  | 15                                                        |
| Nominal cross section                  | 2.5 mm <sup>2</sup>                                       |
| Color                                  | gray                                                      |
| Insulating material                    | PA                                                        |
| Flammability rating according to UL 94 | V0                                                        |
| Area of application                    | Railway industry                                          |
|                                        | Machine building                                          |
|                                        | Plant engineering                                         |
| Maximum load current                   | 24 A (with a 2.5 mm <sup>2</sup> conductor cross section) |

# Plug - SP-H 2,5/15 - 3210758

## Technical data

### General

|                                |                                                       |
|--------------------------------|-------------------------------------------------------|
| Rated surge voltage            | 6 kV                                                  |
| Degree of pollution            | 3                                                     |
| Overvoltage category           | III                                                   |
| Insulating material group      | I                                                     |
| Maximum load current           | 24 A (with 4 mm <sup>2</sup> conductor cross section) |
| Nominal current I <sub>N</sub> | 24 A                                                  |
| Nominal voltage U <sub>N</sub> | 500 V                                                 |
| Open side panel                | No                                                    |

### Dimensions

|        |          |
|--------|----------|
| Width  | 78 mm    |
| Length | 15.8 mm  |
| Height | 39 mm    |
|        | 24.00 mm |
| Pitch  | 5.20 mm  |

### Connection data

|                                                                                         |                        |
|-----------------------------------------------------------------------------------------|------------------------|
| Connection method                                                                       | Spring-cage connection |
| Connection in acc. with standard                                                        | IEC 61984              |
| Conductor cross section solid min.                                                      | 0.08 mm <sup>2</sup>   |
| Conductor cross section solid max.                                                      | 4 mm <sup>2</sup>      |
| Conductor cross section AWG min.                                                        | 28                     |
| Conductor cross section AWG max.                                                        | 12                     |
| Conductor cross section flexible min.                                                   | 0.08 mm <sup>2</sup>   |
| Conductor cross section flexible max.                                                   | 2.5 mm <sup>2</sup>    |
| Min. AWG conductor cross section, flexible                                              | 28                     |
| Max. AWG conductor cross section, flexible                                              | 14                     |
| Conductor cross section flexible, with ferrule without plastic sleeve min.              | 0.14 mm <sup>2</sup>   |
| Conductor cross section flexible, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup>    |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                 | 0.14 mm <sup>2</sup>   |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                 | 2.5 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.5 mm <sup>2</sup>    |
| Stripping length                                                                        | 8 mm ... 10 mm         |
| Internal cylindrical gage                                                               | A3                     |
| Connection method                                                                       | Plug connection        |

### Standards and Regulations

|                                  |     |
|----------------------------------|-----|
| Connection in acc. with standard | CSA |
|----------------------------------|-----|

## Plug - SP-H 2,5/15 - 3210758

### Technical data

#### Standards and Regulations

|                                        |           |
|----------------------------------------|-----------|
|                                        | IEC 61984 |
| Flammability rating according to UL 94 | V0        |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27141151 |
| eCl@ss 7.0 | 27141151 |
| eCl@ss 8.0 | 27141151 |
| eCl@ss 9.0 | 27141151 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC002021 |
| ETIM 5.0 | EC002021 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211802 |
| UNSPSC 7.0901 | 39121402 |
| UNSPSC 11     | 39121402 |
| UNSPSC 12.01  | 39121402 |
| UNSPSC 13.2   | 39121402 |

### Approvals

#### Approvals

---

#### Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

---

#### Ex Approvals

---

## Plug - SP-H 2,5/15 - 3210758

### Approvals

Approvals submitted

#### Approval details

|                                                                                       |       |       |
|---------------------------------------------------------------------------------------|-------|-------|
| CSA  |       |       |
|                                                                                       | B     | C     |
| mm <sup>2</sup> /AWG/kcmil                                                            | 26-12 | 26-12 |
| Nominal current I <sub>N</sub>                                                        | 20 A  | 20 A  |
| Nominal voltage U <sub>N</sub>                                                        | 300 V | 300 V |

|                                                                                                 |       |       |
|-------------------------------------------------------------------------------------------------|-------|-------|
| UL Recognized  |       |       |
|                                                                                                 | B     | C     |
| mm <sup>2</sup> /AWG/kcmil                                                                      | 26-12 | 26-12 |
| Nominal current I <sub>N</sub>                                                                  | 20 A  | 20 A  |
| Nominal voltage U <sub>N</sub>                                                                  | 300 V | 300 V |

|                                                                                                    |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|
| cUL Recognized  |       |       |
|                                                                                                    | B     | C     |
| mm <sup>2</sup> /AWG/kcmil                                                                         | 26-12 | 26-12 |
| Nominal current I <sub>N</sub>                                                                     | 20 A  | 20 A  |
| Nominal voltage U <sub>N</sub>                                                                     | 300 V | 300 V |

|     |
|-----|
| EAC |
|-----|

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| cULus Recognized  |
|------------------------------------------------------------------------------------------------------|

### Accessories

Accessories

Cable housing

## Plug - SP-H 2,5/15 - 3210758

### Accessories

Cable housing - PH 2,5/14 - 3209808



Cable housing, Pitch: 72.8 mm, Length: 19.9 mm, Width: 72.8 mm, Height: 36.8 mm, Number of positions: 14, Color: gray

---

Cable housing - PH 2,5/15 - 3209811



Cable housing, Pitch: 78 mm, Length: 19.9 mm, Width: 78 mm, Height: 36.8 mm, Number of positions: 15, Color: gray

---

End cover

Flange cover - DF-SP-H 2,5 - 3209824



Flange cover, Length: 35.8 mm, Width: 4.5 mm, Height: 24.7 mm, Color: gray

---

Flange

Flange cover - DFS-SP-H 2,5 - 3061431



Flange cover, Length: 35.8 mm, Width: 4.5 mm, Height: 24.7 mm, Color: gray

---

Insulating sleeve

## Plug - SP-H 2,5/15 - 3210758

### Accessories

Insulating sleeve - MPS-IH WH - 0201663



Insulating sleeve, Color: white

---

Insulating sleeve - MPS-IH RD - 0201676



Insulating sleeve, Color: red

---

Insulating sleeve - MPS-IH BU - 0201689



Insulating sleeve, Color: blue

---

Insulating sleeve - MPS-IH YE - 0201692



Insulating sleeve, Color: yellow

---

Insulating sleeve - MPS-IH GN - 0201702



Insulating sleeve, Color: green

---

## Plug - SP-H 2,5/15 - 3210758

### Accessories

Insulating sleeve - MPS-IH GY - 0201728



Insulating sleeve, Color: gray

---

Insulating sleeve - MPS-IH BK - 0201731



Insulating sleeve, Color: black

---

Insulating sleeve - ISH 2,5/0,2 - 3002843



Insulating sleeve, Color: white

---

Insulating sleeve - ISH 2,5/0,5 - 3002856



Insulating sleeve, Color: gray

---

Insulating sleeve - ISH 2,5/1,0 - 3002869



Insulating sleeve, Color: black

---

### Mounting material

## Plug - SP-H 2,5/15 - 3210758

### Accessories

Latching - PR - 3040559



Latching, Number of positions: 1, Color: orange

---

Latching - PR/2 - 3040630



Latching, Number of positions: 2, Color: orange

---

Latching - PRT/2 - 3040631



Latching, can only be released using a screwdriver, Number of positions: 2, Color: orange

---

Latching - PRZ - 3040614



Latching, Length: 3 mm, Width: 5.2 mm, Number of positions: 2, Color: orange

---

### Screwdriver tools

Screwdriver - ST-BW - 1207608



Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages

---



## Plug - SP-H 2,5/15 - 3210758

### Accessories

#### Shield connection

Shield connection clip - PSH 3- 6 - 3040591



Shield connection clip, Color: black

---

Shield connection clip - PSH 5-10 - 3040601



Shield connection clip, Color: black

---

#### Strain relief

Strain relief - PZ/2 - 3040627



Strain relief, Number of positions: 2, Color: black

---

Strain relief - PZ/4 - 3040643



Strain relief, Number of positions: 4, Color: black

---

#### Test plug terminal block

## Plug - SP-H 2,5/15 - 3210758

### Accessories

Test plugs - MPS-MT - 0201744




Test plugs, Color: silver

### Drawings

Circuit diagram



Diagram

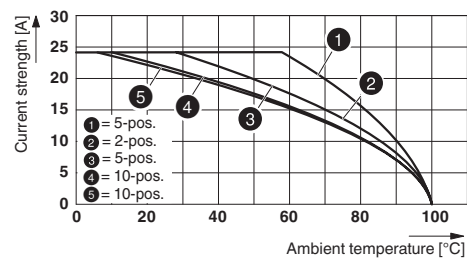

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[3210758](#)